



DAZZLED LIGHTING

LED line

2025


The way to do it b e t t e r.

For more than 16 years we have been proving that quality, technology and reliability can go hand in hand. LED line is a brand that does not stand still - we consistently set new standards in the LED lighting industry, providing solutions tailored to real market needs.

Our products already reach 28 countries around the world, making us a strong and trusted partner in international markets. In 2024, we have made more than 19,000 shipments, supporting our customers in their projects - from home installations to advanced lighting systems in commercial and industrial spaces.

Hundreds of orders go out from our state-of-the-art 3,000-square-meter logistics center every day, with on-time delivery and quality as our top priorities. We operate efficiently, responsibly and with full commitment - because we know that in today's world it's not just the product that counts, but also the experience behind its delivery.

„The way to do it better” is not just a slogan – it's our commitment to partners, customers, and the entire market.



16
years on
the market



28
countries we
deliver to



19 000
packages sent
in 2024



3 000
m2, warehousing
area

Over 16 years of experience in the industry



A team of experts available



Energy-efficient solutions as a sales advantage



Quality and safety confirmed by tests in the LED line LAB



Comprehensive project support for your investment

2010	2011	2012-2013	2014	2015	2016	2017	2018	2019	2021	2023	2024
The LED line brand is established	We are the first in Poland to introduce innovative LED 150 and LED 600 strips with SMD3528 diodes, which are now the industry standard	We are introducing MULTIWHITE LED strips with special diodes, currently protected by a patent in the EU.	Export department is established to serve international partners.	We introduced an SMD LED with four chips, creating an RGBW LED strip offering RGB colour selection and intense white light.	Platform integration is implemented, providing partners with real-time access to database.	With EU funding (RPO WM 2014–2020), we built our own lab for LED line quality control.	We redesigned our industrial offer, improved distribution, and implemented a PIM system for better product data management.	We launched the LED line Light Research Center, where the R&D team develops and tests products according to LED line quality standards.	LEDIN grows – exclusive distributor of Merrytek in Poland, B2B shift, and new warehouse in Tobolice (850 pallet spaces).	We rebranded LED line – new logo, colors, brand strategy, and architecture. We launched 50 new products and introduced AURA line.	We have reached 28 countries to which we export to.

Our Lab, Your Assurance

LED line LAB's foremost objective is to develop and offer products that comply with every relevant directive and standard, including those that are exceptionally stringent, which we uphold as our day-to-day benchmark. Our unwavering focus on product quality — its reliability, durability and safety — has resulted in a 99.54% failure-free rate.



Quality without compromise

LED line LAB was established to create and verify products that meet even the most stringent directives and standards — now the company's benchmark. Our strict approach to quality, including durability, safety, and reliability, results in 99.54% . Every product batch undergoes continuous, complete quality testing. Only those that pass are approved for sale, ensuring customers receive trouble-free products at every stage — from sales to installation and use.



In search of optimal solutions

The Research & Development department has been founded to design and develop new products that meet the evolving market expectations and needs. The entire process is being managed in-house—from concept and prototyping through to production and implementation. Through detailed research, we identify the most beneficial product additions to the LED line range, ensuring it remains comprehensive and optimised, ultimately delivering a higher return on investment.


Expert support available to customers

Thanks to our trusted IES and EULUMDAT files, professionals like designers, architects or project managers can work with greater ease and precision on their projects. With these high-quality photometric files—compatible with Dialux and Relux—project planning becomes simpler, allowing for the accurate selection of the right luminaires for any project.

Additionally, we advise customers on the best lighting solutions to meet standards while saving energy and reducing costs.

The laboratory's high-end equipment includes:

- Photometric darkroom equipped with a goniophotometer
- Test stand for light parameters
- Stand for electromagnetic compatibility EMC measurements
- Stand for aging tests
- Stand for harmonic emission measurements
- Thermal test stand with equipment: 16-channel temperature meter and thermal imaging camera
- Test stand for voltage drops of LED Strips
- Test stand for dimmable light sources

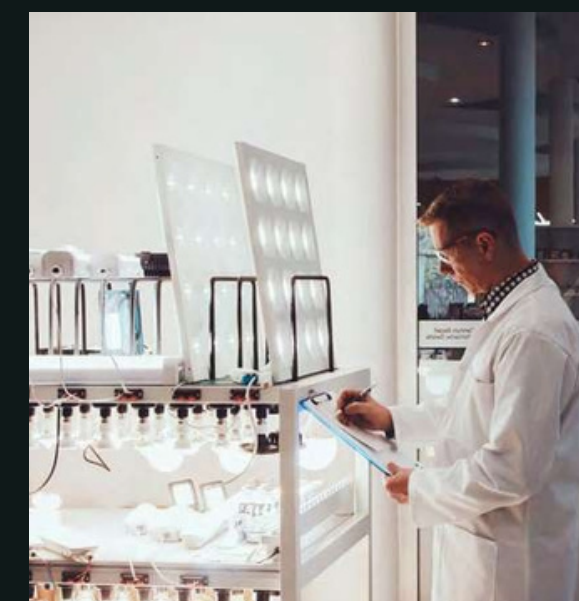


MAIN INDEX

16	01		198	06
	FLOODLIGHTS			LED STRIPS
	SOLAR FLOODLIGHTS			LED CONTROLLERS
	HIGH BAY			LED DRIVERS
	HERMETIC LUMINAIRE			LED PROFILES
80	02		236	07
	PARK LUMINAIRES			LED LIGHT SOURCES
	ROAD LUMINAIRES			LED MODULES
	SOLAR ROAD LUMINAIRES		264	08
	03			OUTDOOR WALL LAMPS
112				DECORATIVE
	LED PANELS			LED SPOTLIGHTS
	CEILING LAMPS			PRODUCT INDEX
	DOWNLIGHTS		292	CONTACT
166	04		304	
	LINEAR LAMPS			
182	05			
	TRACK LIGHTS			

CATEGORY INDEX

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
-----------	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

FLOODLIGHTS

			
FLOODLIGHT PRIME	ESTADIO	PHOTON	LUMINO
18	26	30	34




SOLAR FLOODLIGHTS

	
LUNIR	FLOWLITE
40	44

HIGH BAY

			
PHANTOM	RAIDER UFO	ECOBEBAM	STREAKBAY
48	56	58	60


HERMETIC LUMINAIRES

				
RANGER	LINKER	LINIX	TRI-PROOF	VA N TA
66	70	74	76	78


CATEGORY INDEX

04 166

LINEAR LAMPS



FUSION
168




EXECULINE
180

05 182

TRACK LIGHTS




LUMICANTO
184



PIPE
196

06 198


LED STRIPS



COB
200



EXPERT
204



CLASSIC
206



WATERPROOF
212



ACCESSORIES
218

LED CONTROLLERS



REMOTE
224




VARIANTE
226

LED DRIVERS




WATERPROOF
228



MULTIPower
230

LED PROFILES



ALUMINIUM PROFILES
234

LED LIGHT SOURCES



CERAMIC
238



GLASS
244



FILAMENT
248



BASIC
252



T8 LED
256



ACCESSORIES
258

LED MODULES



EXPERT
262

OUTDOOR WALL LAMPS



CUBE
266



CILINDER
266

DECORATIVE




TAZA
270



CAMELIA
272



RIWIA
274



JUTE
276


LED SPOTLIGHTS




CLASSIC
278



WATERPROOF
284



ROLLO
288



CUBO
290

ALPHABETICAL INDEX

A		F		R	
ACCESSORIES LED LIGHT SOURCE	258	FILAMENT LED LIGHT SOURCE	248	RAIDER	56
ACCESSORIES LED PANELS	128	FLAMINGO	98	RANGER	66
ACCESSORIES LED STRIP	218	FLOODLIGHT PRIME	18	REMOTE LED CONTROLLER	224
ACTON		FLOWLITE	44	RIWIA	274
ALUMINIUM PROFILES	136	FRAMELESS	164	ROLLO	288
B	234	FUSION	168	S	
BACKLIT				SPLIT POLE	
BASIC LED LIGHT SOURCE	122	G		STREAKBAY	104
C	252	GLASS LED LIGHT SOURCE	244	STREETLITE	60
CALMOS		J		SUNSTREET	102
CAMELIA		JUTE		T	110
CAMINO		L	276	T8 LED TAZA	
CERAMIC LED LIGHT SOURCE	142	LED MODULES EXPERT		TRI-PROOF	256
CILINDER	272	LINUX	262		270
CLASSIC LED STRIP	94	LINKER			76
CLASSIC SPOTLIGHT	238	LUMICANTO	74	V	
COB LED STRIP	266	LUMINO	70	VARIANTE LED CONTROLLER	226
CUBE	206	LUNAR	184		
CUBO	278	LUNIR	34	W	
	200		132	WATERPROOF LED DRIVER	228
	266	M	40	WATERPROOF LED STRIP	212
	290	MOLLY	160	WATERPROOF SPOTLIGHT	284
D		MULTIPOWER LED DRIVER	230		
DIORA	114	N			
E		NOLINA			
EASY FIX		P	82		
EASY FIX PRO	154	PANEL 2IN1			
EASY FLEX	150	PARKLITE	118		
ECOBEAM	144	PHANTOM	86		
ELIDA	58	PHOTON	48		
ESTADIO	90	PIPE	30		
EXECULINE	26	PLAFON IP44	196		
EXPERT LED STRIP	180		140		
	204				

ICONS

Technical icons		Light distributions		Housing colours	
	manufacturer issues a X-year warranty for this product		beam 360		white
	IEC protection class I for power supplies		beam 60o - 70o		black
	IEC protection class II for power supplies		beam 90o		grey
	IEC protection class III for power supplies		beam 110o		aluminium
	type of surface		beam 120o		silver
	suitable for installation		asymmetric		sanded steel
	IP protection class		park lighting		satin
	IK protection rating		street lighting		gold
	power factor				gold & black
	voltage range and voltage type	Colour temperatures			gold & white
	ambient temperature suitable for operation				copper
	number of ON/OFF cycles				gold glass
	compatible with DALI control system				graphite glass
	dimmable				green
	ULOR - percentage of light emitted into the upper hemisphere				pink
	roll length				yellow
	copper thickness (oz)				
	compatible with the TUYA system controllers				
	maximum output				
	battery type		1800K		
	high quality material resistant to yellowing caused by UV		2200K		
	ENEC 18		2700K		
	TÜV SÜD certificate		3000K		
	energy efficiency class		4000K		
	product on order - waiting time about 3-4 months.		5000K		
	new product		6000K		
			6500K		
			11000K		
			CCT		
			yellow		
			red		
			green		
			blue		
			RGB		
			RGBW		

LED line

01

FLOODLIGHTS

FLOODLIGHT PRIME

18

LUMINO

34

ESTADIO

26

PHOTO N

30

SOLAR FLOODLIGHTS

LUNIR

40

FLOWLITE

44

HIGH BAY

PHANTOM

48

RAIDER

56

ECOBELAM

58

STREKBY

60

HERMETIC LUMINAIRE

RANGER

66

LINKER

70

LINIX

74

TRI-PROOF


76

VANTA

78



FLOODLIGHT FLOODLIGHT PRIME

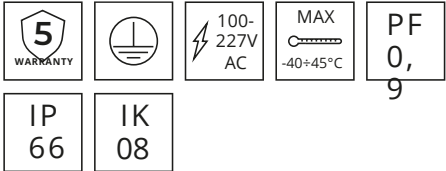

EFFICACY 140 lm/W
Power [W]:
30-600
Luminous flux [lm]:
4200-84000
Beam angle [°]:
30-120, 150*80, 150*100
Colour temperature [K]:




Lifetime [h]:
L70B50 - 50.000
Housing:
aluminium ADC12




Light distributions

Designed for maximum flexibility, FLOODLIGHT PRIME offers multiple beam angles, ensuring the perfect lighting solution for any application. Its versatility makes it ideal for sports fields, industrial areas, and large outdoor spaces, delivering optimal performance wherever it's needed.

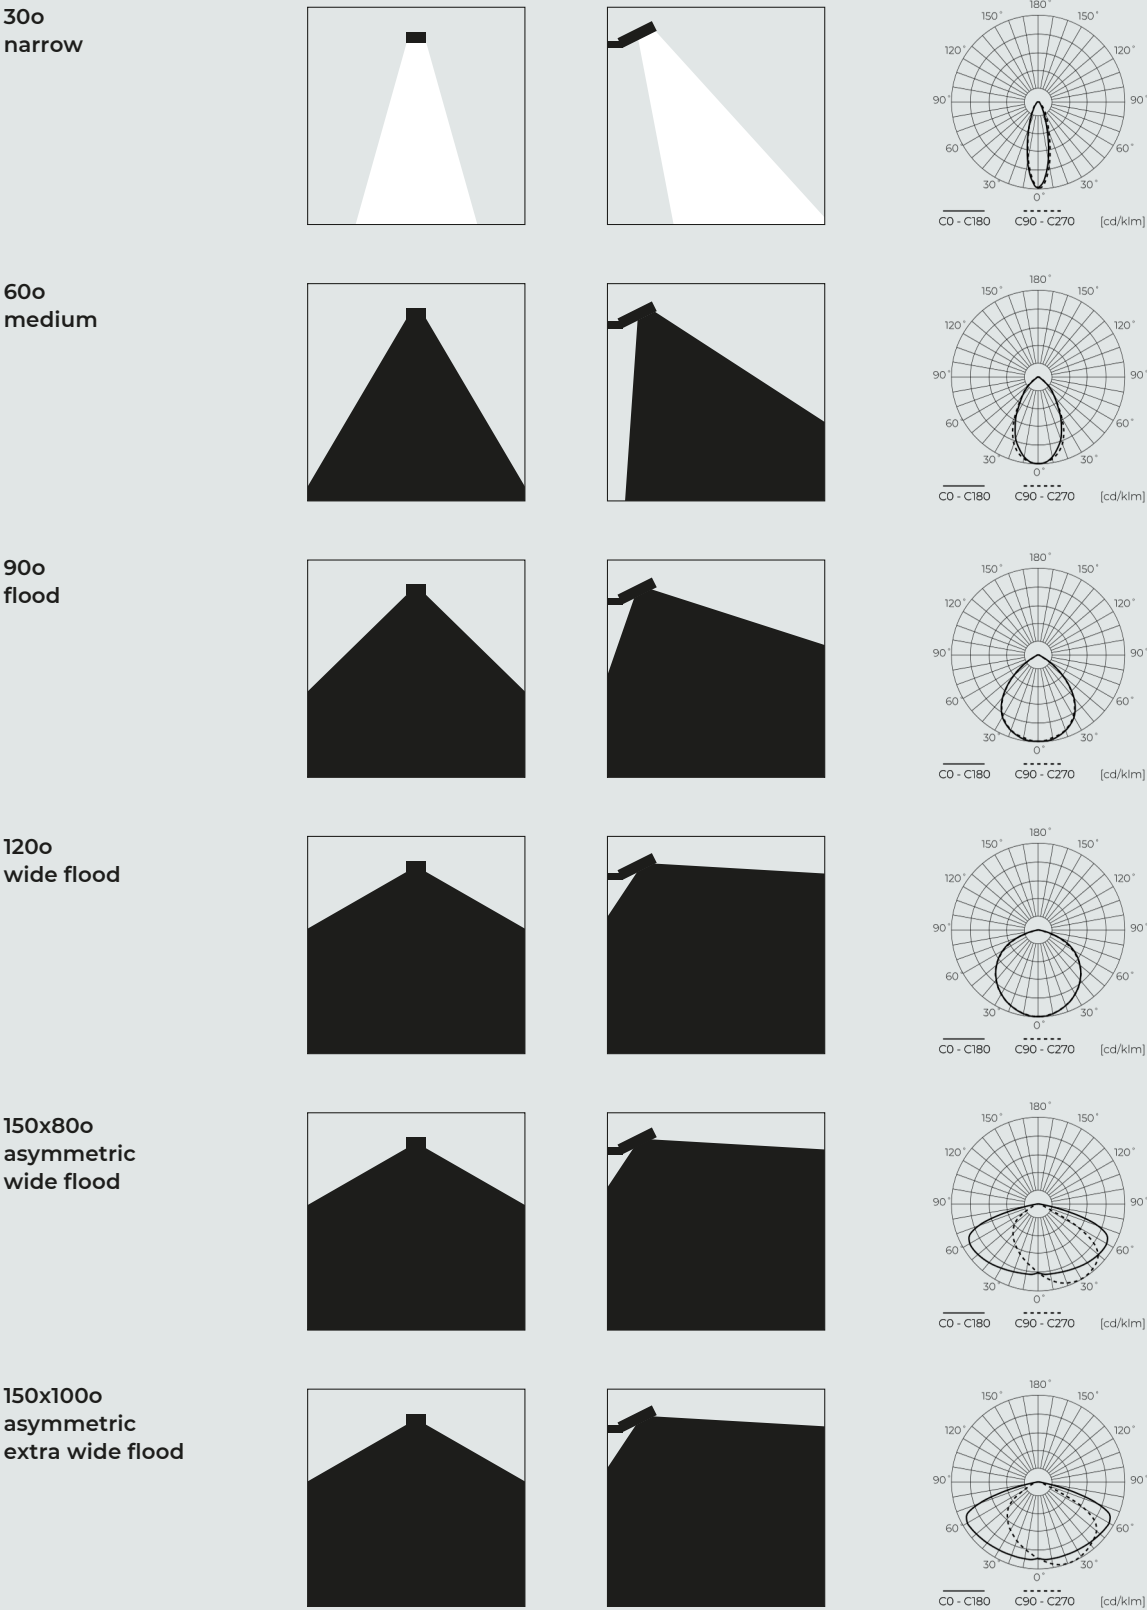

PRECISION LIGHTING
FOR SPORTS FIELDS


The FLOODLIGHT PRIME luminaire is the perfect solution for illuminating sports fields and large outdoor areas. Thanks to its asymmetrical beam angles, it delivers precise and uniform lighting, ensuring optimal visibility across the entire playing area. This advanced optical design minimizes glare and light spill, directing illumination exactly where it's needed for enhanced performance.

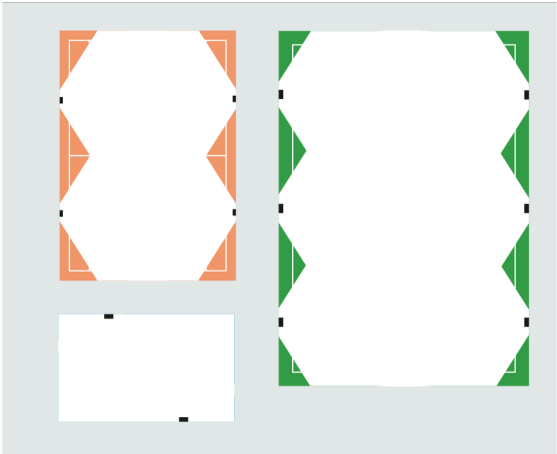

FLOODLIGHT PRIME

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
200203	30	120	4000	4200
200289	30	90	4000	4200
200272	30	60	4000	4200
200265	30	30	4000	4200
202566	30	150*80	4000	4200
202559	30	150*100	4000	4200
202726	30	120	3000-4000-5000 (CCT)	4200
202900	30	30	3000-4000-5000 (CCT)	4200
202733	30	150*80	3000-4000-5000 (CCT)	4200
200210	50	120	4000	7000
200319	50	90	4000	7000
200302	50	60	4000	7000
200296	50	30	4000	7000
202443	50	150*80	4000	7000
202542	50	150*100	4000	7000
202757	50	120	3000-4000-5000 (CCT)	7000
202948	50	30	3000-4000-5000 (CCT)	7000
202740	50	150*80	3000-4000-5000 (CCT)	7000

DIMENSIONS [mm]



30/50W

FLOODLIGHT PRIME


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
200227	100	120	4000	14000
200340	100	90	4000	14000
200333	100	60	4000	14000
200326	100	30	4000	14000
202450	100	150*80	4000	14000
202528	100	150*100	4000	14000
202764	100	120	3000-4000-5000 (CCT)	14000
202986	100	30	3000-4000-5000 (CCT)	14000
202771	100	150*80	3000-4000-5000 (CCT)	14000




200647	150	120	4000	21000
202610	150	90	4000	21000
200654	150	60	4000	21000
202603	150	30	4000	21000
202580	150	150*80	4000	21000
202627	150	150*100	4000	21000
202788	150	120	3000-4000-5000 (CCT)	21000
203020	150	30	3000-4000-5000 (CCT)	21000
202795	150	150*80	3000-4000-5000 (CCT)	21000



DIMENSIONS [mm]



100W
200227 202528
200340 202764
200333 202986
200326 202771
202450



150W
200647 202627
202610 202788
200654 203020
202603 202795
202580

FLOODLIGHT PRIME



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
200234	200	120	4000	28000
200371	200	90	4000	28000
200364	200	60	4000	28000
200357	200	30	4000	28000
202467	200	150*80	4000	28000
202535	200	150*100	4000	28000
202801	200	120	3000-4000-5000 (CCT)	28000
203068	200	30	3000-4000-5000 (CCT)	28000
202818	200	150*80	3000-4000-5000 (CCT)	28000






200241	400	120	4000	56000
202689	400	90	4000	56000
202672	400	60	4000	56000
202665	400	30	4000	56000
200401	400	150*80	4000	56000
202696	400	150*100	4000	56000



200258	600	120	4000	84000
202658	600	90	4000	84000
202641	600	60	4000	84000
202634	600	30	4000	84000
202597	600	150*80	4000	84000
200418	600	150*100	4000	84000

DIMENSIONS [mm]

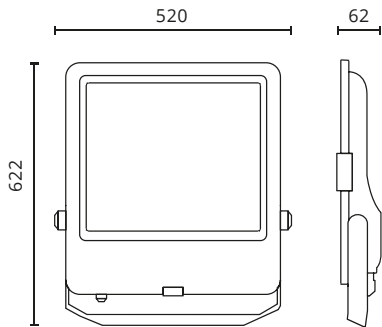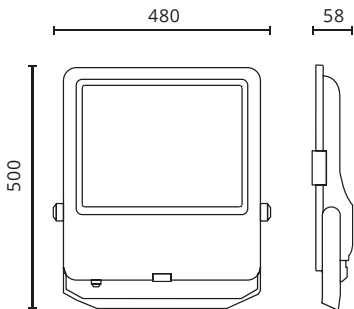


200W
200234 202535
200371 202801
200364 203068
200357 202818
202467

400W
200241 202665
202689 200401
202672 202696


600W
200258 202634
202658 202597
202641 200418





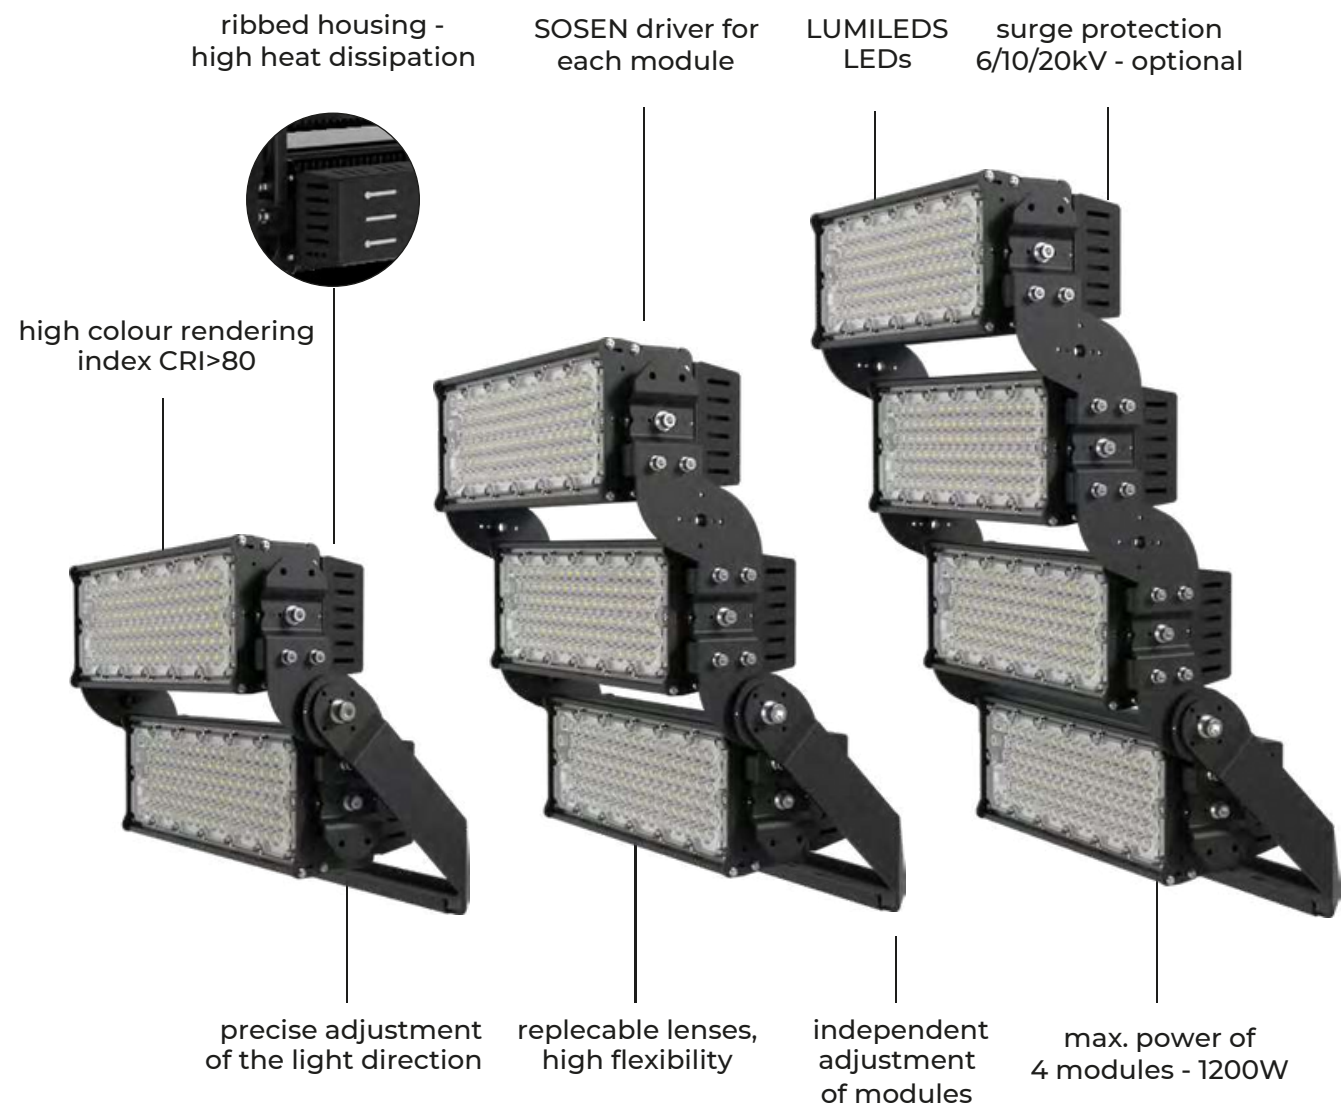

ON DEMAND
FLOODLIGHT
ESTADIO

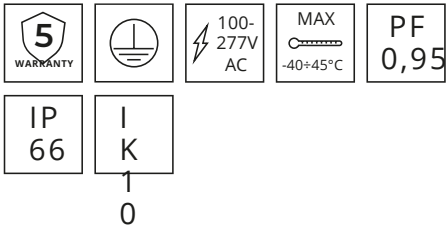

EFFICACY 170 lm/W

Power [W]:
200, 250, 300

Luminous flux [lm]:
34000-204000

Beam angle [°]:
20, 40, 60, 90, P50

Combining modules:
max. 4

Colour temperature [K]:



Lifetime [h]:
L90B20 - >50.000
L70B50 - 100.000

Housing:
aluminium AL1100



Floodlight ESTADIO 200W CRI>80

SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
217669	New	200	20	5000	34000
217003	New	200	40	5000	34000
217010	New	200	60	5000	34000
217027	New	200	90	5000	34000
217034	New	200	P50	5000	34000


Floodlight ESTADIO 250W CRI>80

217676	New	250	20	5000	42500
217041	New	250	40	5000	42500
217058	New	250	60	5000	42500
217065	New	250	90	5000	42500
217072	New	250	P50	5000	42500

Floodlight ESTADIO 300W CRI>80

217492	New	300	20	5000	51000
217089	New	300	40	5000	51000
217096	New	300	60	5000	51000
217 102	New	300	90	5000	51000
217 119	New	300	P50	5000	51000

DIMENSIONS [mm]

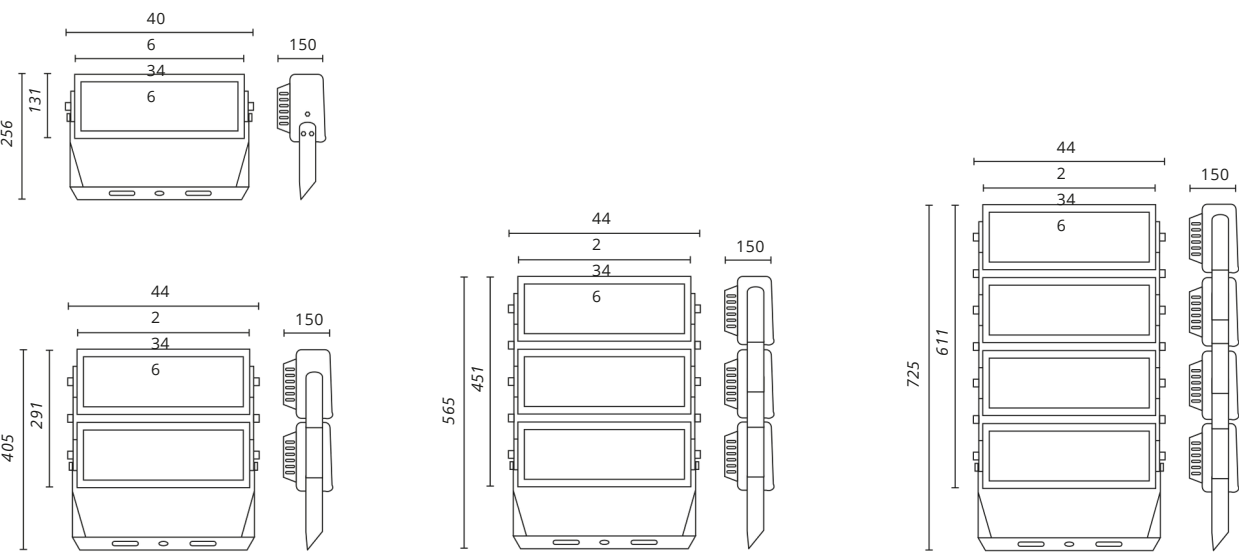

ESTADIO anti-glare shield

SYMBOL		NAME	PER NUMBER OF MODULES
217508	New	ESTADIO anti-glare shield for single module	1



ESTADIO Single-mounting bracket

217126	New	ESTADIO mounting bracket for single module	1
--------	-----	--	---



ESTADIO Multi-mounting bracket

217133	New	ESTADIO mounting bracket for 2-4 modules	2-4
--------	-----	--	-----



ESTADIO laser pointer

217140	New	Laser pointer to position luminaires on pole	1-4
--------	-----	--	-----



CUSTOMIZABLE STADIUM LIGHTING

The Estadio luminaire is designed with maximum application flexibility in mind. Available in three power variants – 200, 250 and 300W – it allows for modular configuration of luminaires, enabling you to combine units freely and achieve a total system power of up to 1200W.

Thanks to a wide selection of lenses and colour temperatures, Estadio can be precisely tailored to the unique requirements of any lighting project.

Its versatile optical configurations ensure accurate light distribution, delivering optimal performance across stadiums and infrastructure environments.

Estadio is a solution that merges advanced technology with practical adaptability — guaranteeing efficiency, reliability, and performance in the most demanding applications.





FLOODLIGHT PHOTON

3 WARRANTY		220-240V AC	MAX -20+40°C	PF 0,7
PF 0,9	IP 65	IK 05	IK 06	

EFFICACY 100 lm/W
Power [W]:
10-100
Luminous flux [lm]:
1000-10000
Beam angle [°]:
120
Colour temperature [K]:
4000




Lifetime [h]:
L70B50 - 30.000
Housing:
aluminium ADC12



Light distributions






Luminous flux [lm]
1000, 2000, 3000, 5000, 10000
Beam angle:
120°

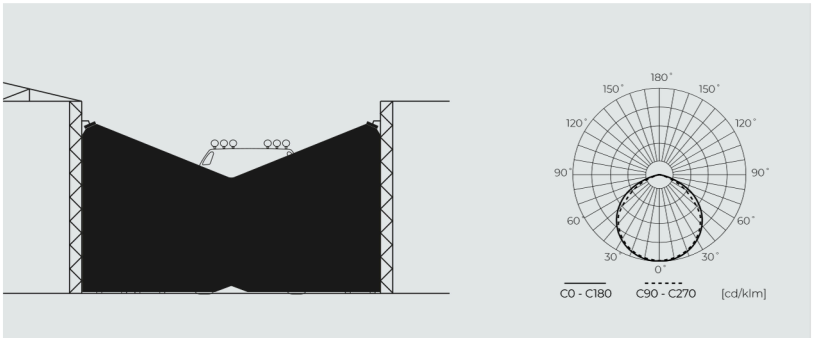

Smart lighting with PIR sensor

The advanced PIR motion sensor allows you to adjust sensitivity, set the light output (lumens), and define the activation time. This solution ensures convenience, energy savings, and intelligent lighting control.

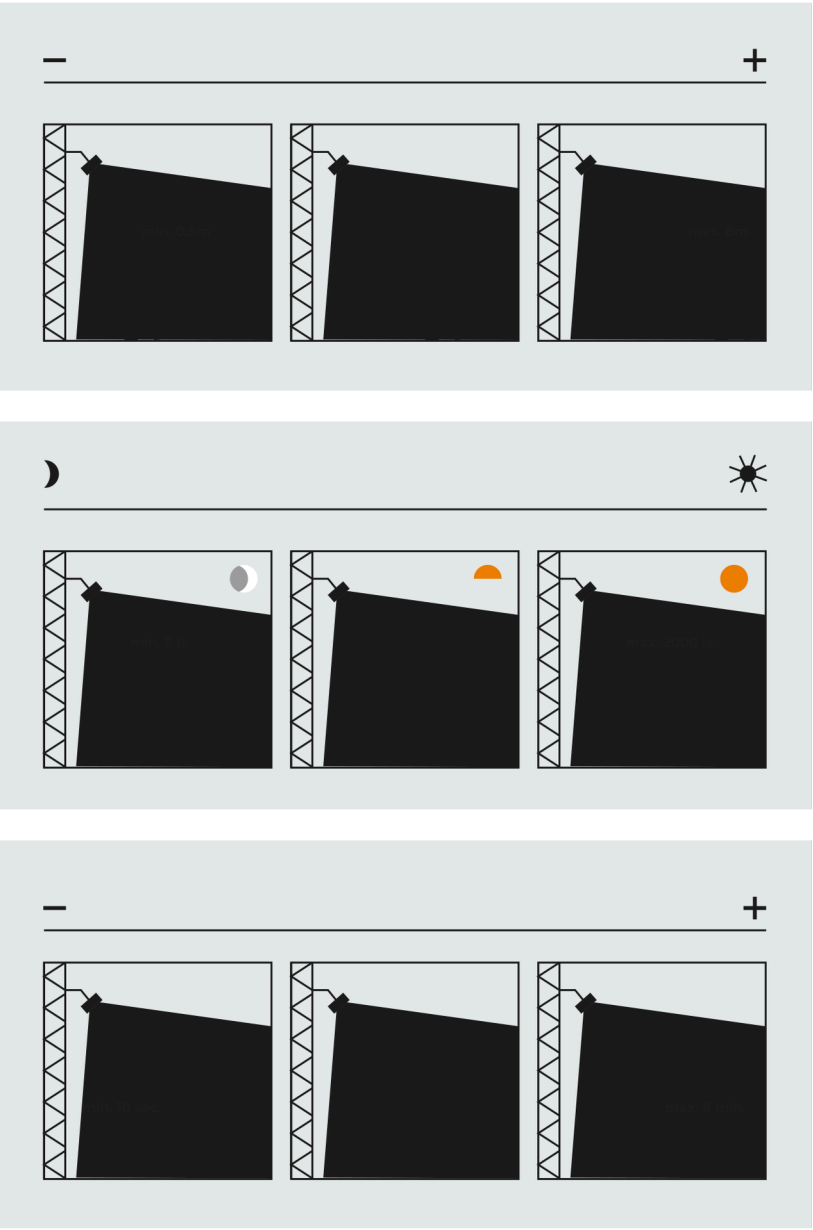

Floodlight PHOTON



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR
203495	10	120	4000	1000	
203501	10	120	4000	1000	●




203518	20	120	4000	2000	
203488	20	120	4000	2000	●




203525	30	120	4000	3000	
203532	30	120	4000	3000	●


DIMENSIONS [mm]




10W
203495




20W
203518




30W
203525



10W
203501



20W
203488



30W
203532

Floodlight PHOTON



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR
203549	50	120	4000	5000	
203556	50	120	4000	5000	●




203563	100	120	4000	10000	
203747	100	120	4000	10000	●

Floodlight PHOTON RGB




470492	50	120	RGB
--------	----	-----	-----


DIMENSIONS [mm]




50W
203549

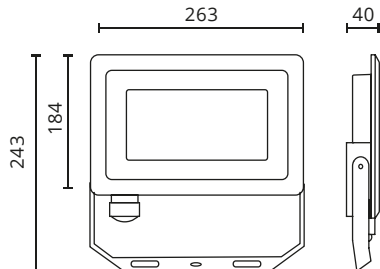


100W
203563




50W RGB
470492

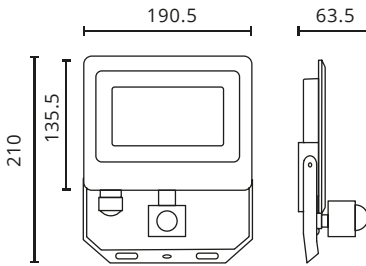


50W
203556

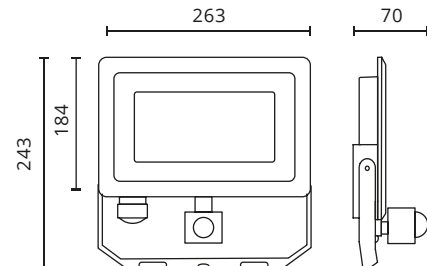

100W
203747

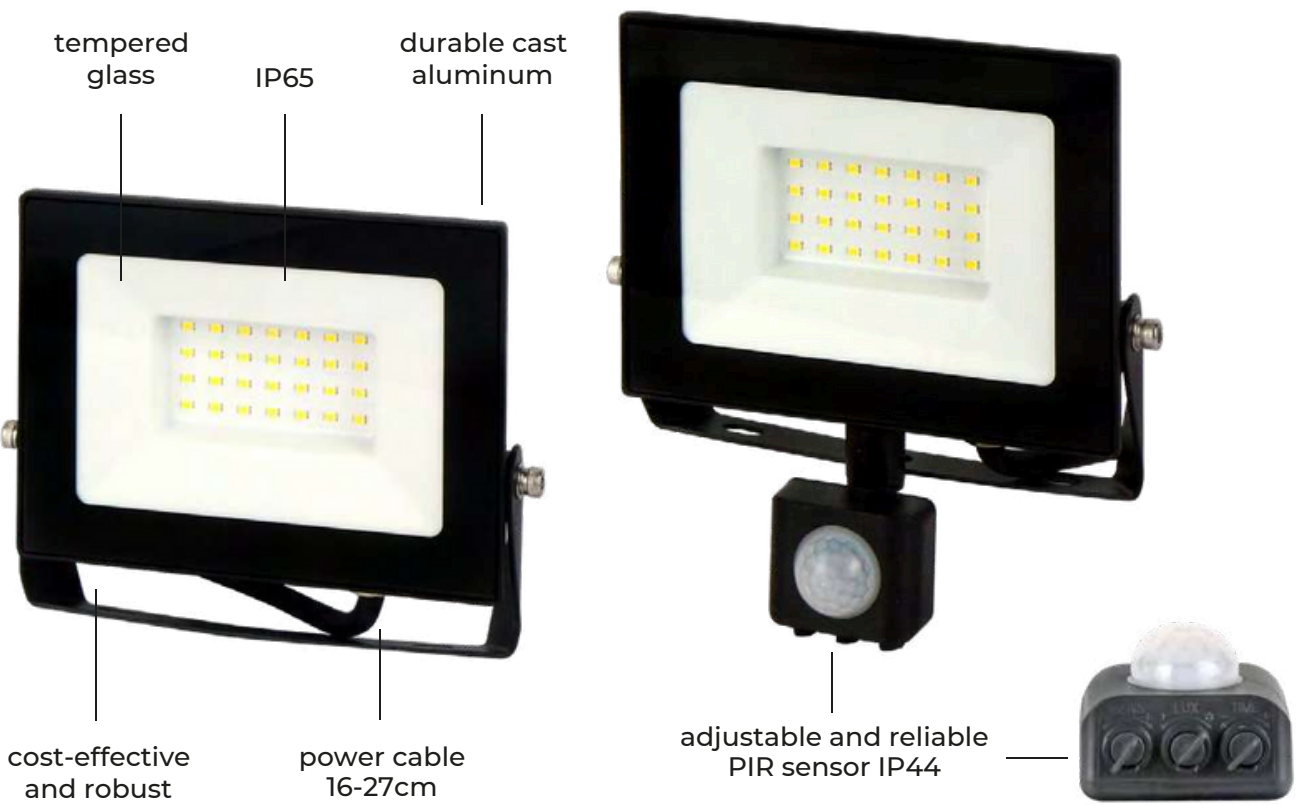

FLOODLIGHT LUMINO

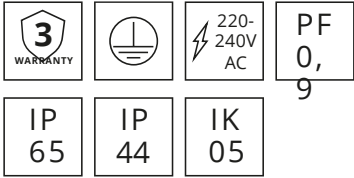

EFFICACY 100 lm/W

Power [W]:
10-200

Luminous flux [lm]:
1000-20000

Beam angle [°]:
110

Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 25.000

Housing:
aluminium ADC12



Smart lighting with PIR sensor

The advanced PIR motion sensor allows you to adjust sensitivity, set the light output (lumens), and define the activation time. This solution ensures convenience, energy savings, and intelligent lighting control.



Light distributions

The LUMINO floodlight provides wide and even illumination with a beam angle of 110°, providing effective lighting for a variety of outdoor and indoor applications. Versions with an adjustable motion sensor increase energy efficiency and convenience, making it a flexible and easy-to-maintain solution.

Even space coverage – wide, uniform illumination, ideal for elevations, driveways, parking lots or home usage.


Effective utility lighting – optimal light distribution allows for effective illumination of both close and medium-range areas

No spotlight effect – unlike spotlights with a narrower angle of illumination, LUMINO provides diffused light, which increases visual comfort and makes objects illuminated in a natural and even way, without sharp contrasts.



Luminous flux [lm]
1000, 2000, 3000, 5000,
10000, 15000, 20000

Beam angle:
110°

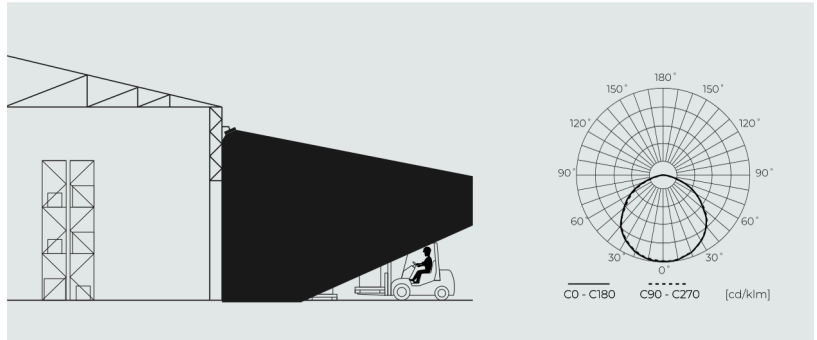


Floodlight LUMINO


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR
203280	10	110	4000	1000	
203358	10	110	4000	1000	●
203297	20	110	4000	2000	
203365	20	110	4000	2000	●
203303	30	110	4000	3000	
203372	30	110	4000	3000	●
203310	50	110	4000	5000	
203389	50	110	4000	5000	●




DIMENSIONS [mm]




10W
203280




20W
203297




30W
203532




50W
203556




10W
203358



20W
203365



30W
203372




50W
203389

Floodlight LUMINO


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
203327	100	110	4000	10000
203334	150	110	4000	15000
203341	200	110	4000	20000




DIMENSIONS [mm]



100W
203747



150W
203747



200W
203747




nature's energy your inspiration



Unleash the solar power with us

Solar power is a renewable energy source that significantly reduces our dependence on fossil fuels. Harnessing solar energy can lead to long-term economic savings and increased energy independence. Additionally, adopting solar power contributes to environmental preservation, paving the way for a cleaner and more sustainable future. Our aim is to make sure we offer products that help achieving this shared goal.



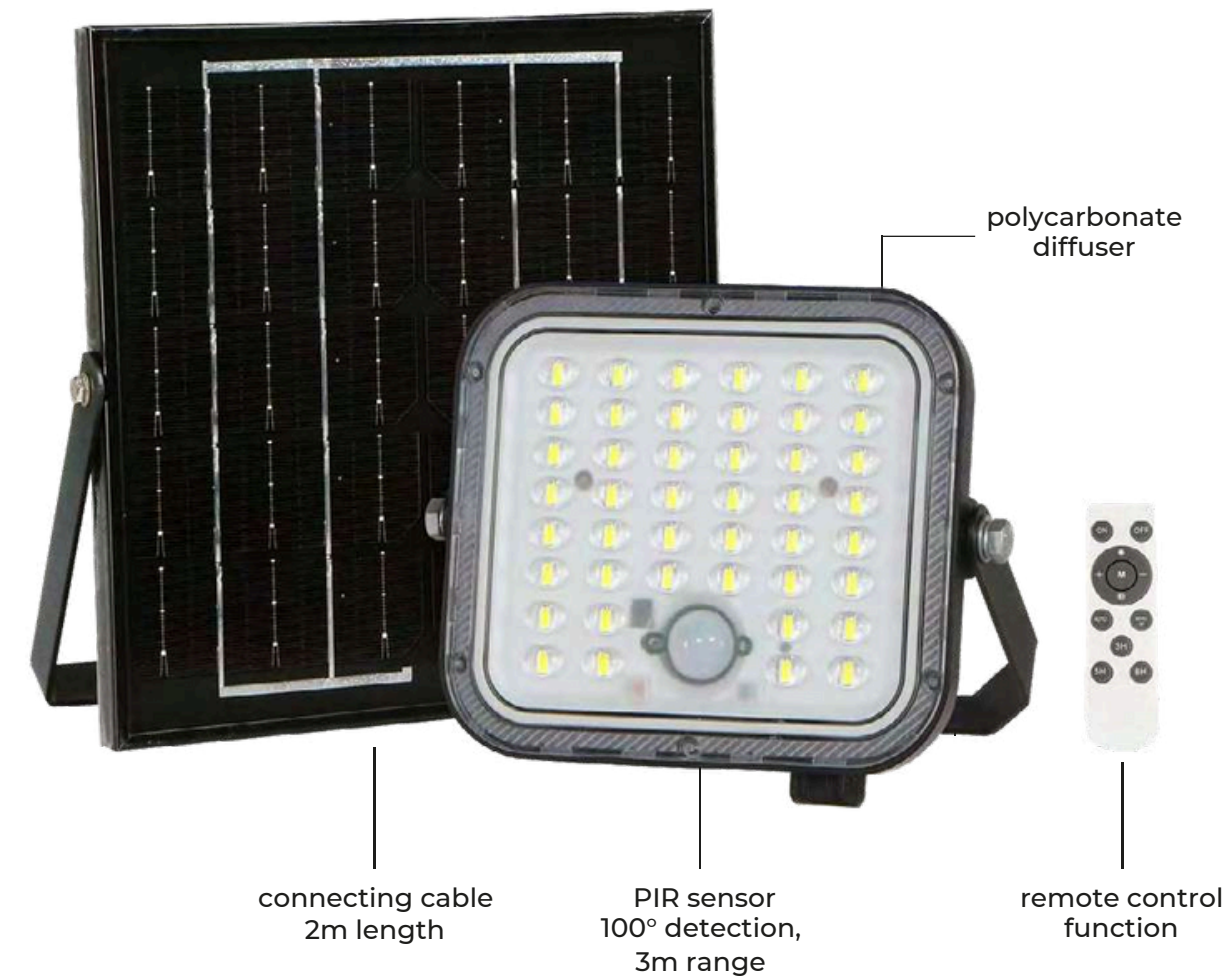

SOLAR FLOODLIGHT
LUNIR



Photovoltaic power [W]:
6

Battery capacity [mAh]:
4000

Photocurrent [A]:
0,94

Battery runtime [h]:
4,5 (100% lumens)

Charging time [h]:
starting at 4 hours

Luminous flux [lm]:
1400

Beam angle [°]:
90

Colour temperature [K]:
4000




Lifetime [h]:
L70B50 - 30.000

Housing:
ABS



Unlimited lighting anywhere you need

Thanks to its separate photovoltaic panel, LUNIR floodlight offers full installation flexibility. The panel can be positioned in a sun-exposed area to maximize energy harvesting, while the luminaire itself can be mounted exactly where light is needed — regardless of direct sunlight access. This solution ensures optimal charging efficiency and reliable lighting performance even in shaded or hard-to-reach locations, making it ideal for gardens, driveways, patios, or utility spaces.

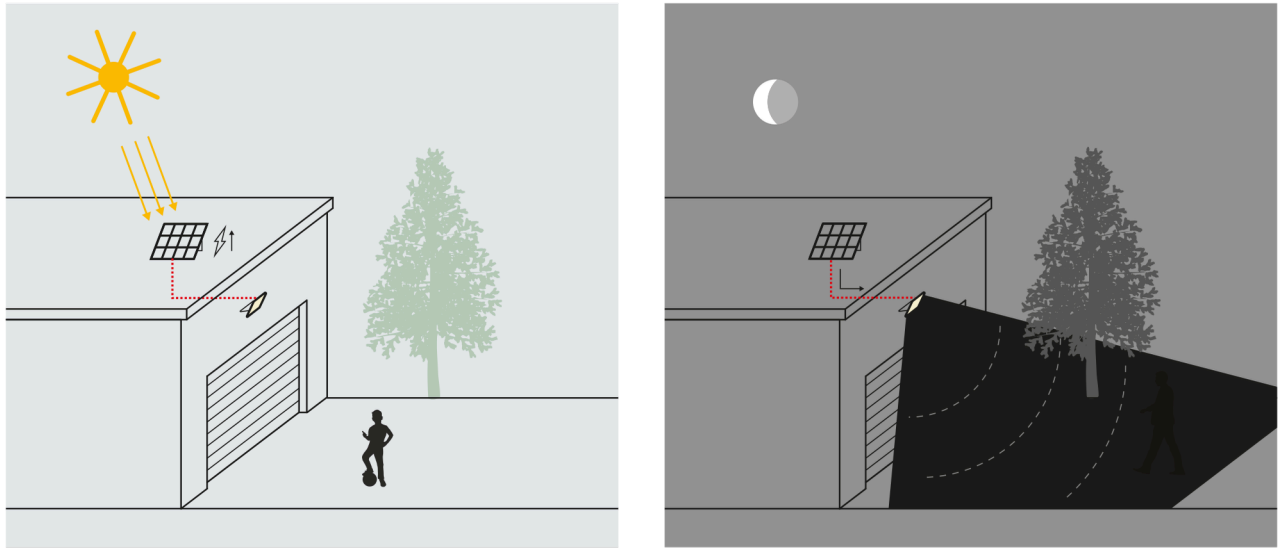


PIR sensor

Floodlight is equipped with a passive PIR type motion sensor, providing automatic control of the luminaire's operation. The sensor is characterized by a detection angle of 100° and a range of up to 3 meters, allowing it to respond quickly to movement in the environment. Such a solution increases the functionality of the luminaire and promotes energy savings, making it an ideal choice for outdoor applications such as gardens, driveways and terraces.



Remote control functions


The remote control for the LUNIR solar floodlight allows you to easily manage the lighting - turn the light on and off, set the light modes, adjust the operating time and brightness. Thanks to it, you will adjust the operation of the lamp to your needs without having to climb a ladder or reach high. Comfort, economy and full control - whenever you need it.

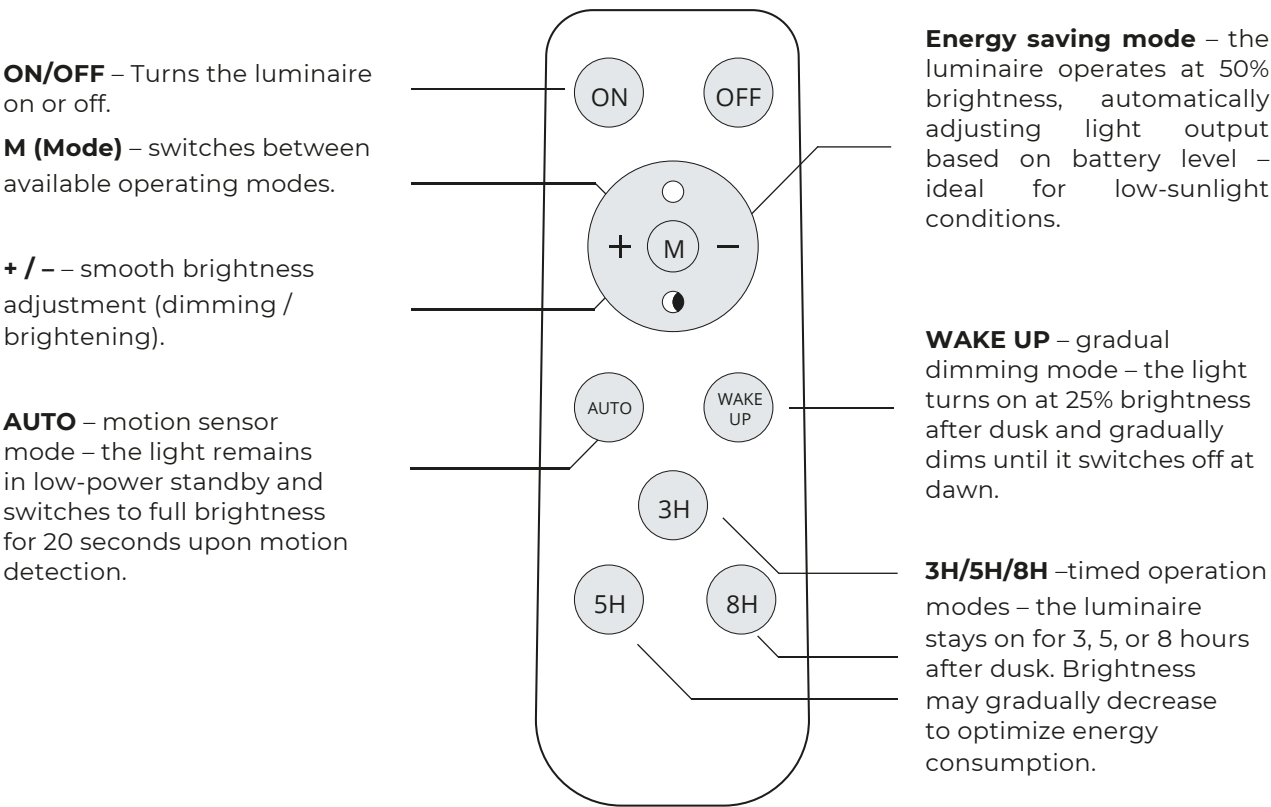

Solar floodlight LUNIR



SYMBOL		PV POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
211339	New	6	90	4000	1400

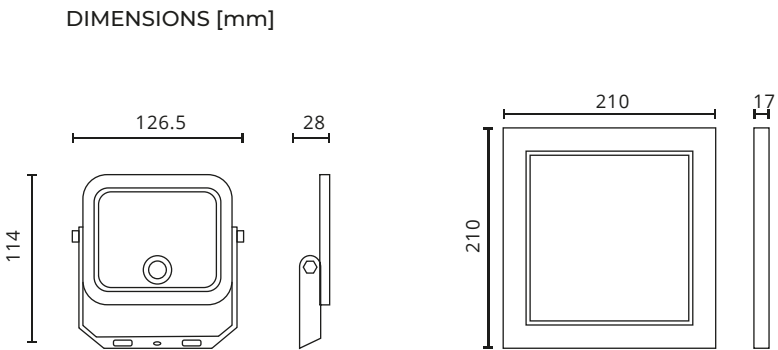



PIR sensor
100° detection,
3m range, 30 sec

integrated photovoltaic
cell and battery mode selection
and CCT change



independent of traditional
energy sources

SOLAR FLOODLIGHT
FLOWLITE



Power [W]:
1,75
Photovoltaic power [W]:
1,20
Battery capacity [mAh]:
2130
Luminous flux [lm]:
1000
Beam angle [°]:
110
Colour temperature [K]:



Lifetime [h]:
L70B50 - 35.000

Housing:
ABS

[View product page](#)

PIR sensor & mode options

The floodlight features a built-in PIR motion sensor with a 100° detection angle and up to 3 m range, enabling automatic control after dusk. The sensor is designed to detect only relevant movement, helping to prevent unnecessary activation and reduce energy waste. This enhances both efficiency and user comfort, making it ideal for gardens, driveways and terraces.

Two operating modes are available:


Mode 1 – the light remains off and activates at full brightness for 30 seconds when motion is detected.

Mode 2 – the light stays on at 10% brightness and boosts to full brightness for 30 seconds upon motion detection.

This dual-mode function allows the lighting to adapt to user needs, balancing visibility, safety and energy savings.



1 MODE	-	PIR MAX 3m max 30s
2 MODE	10%	max 30s




mode switching
 CCT



Solar floodlight FLOWLITE




SYMBOL	PV POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
211346	New 1,75	110	3000-4000-6500 (CCT)	1000


DIMENSIONS [mm]



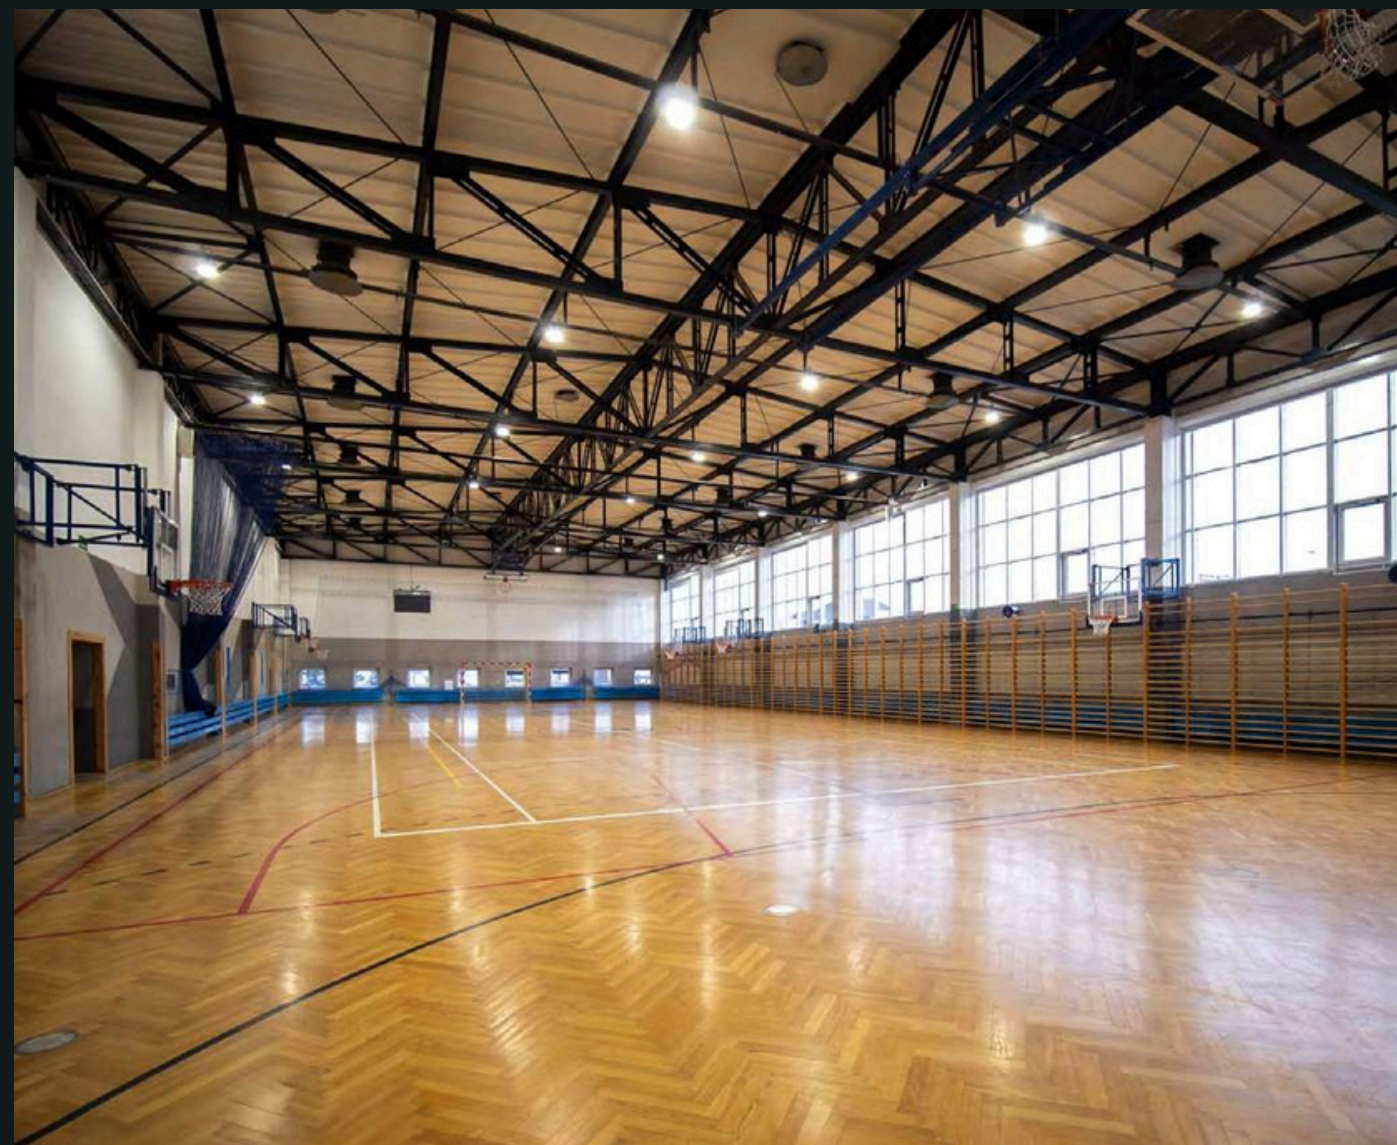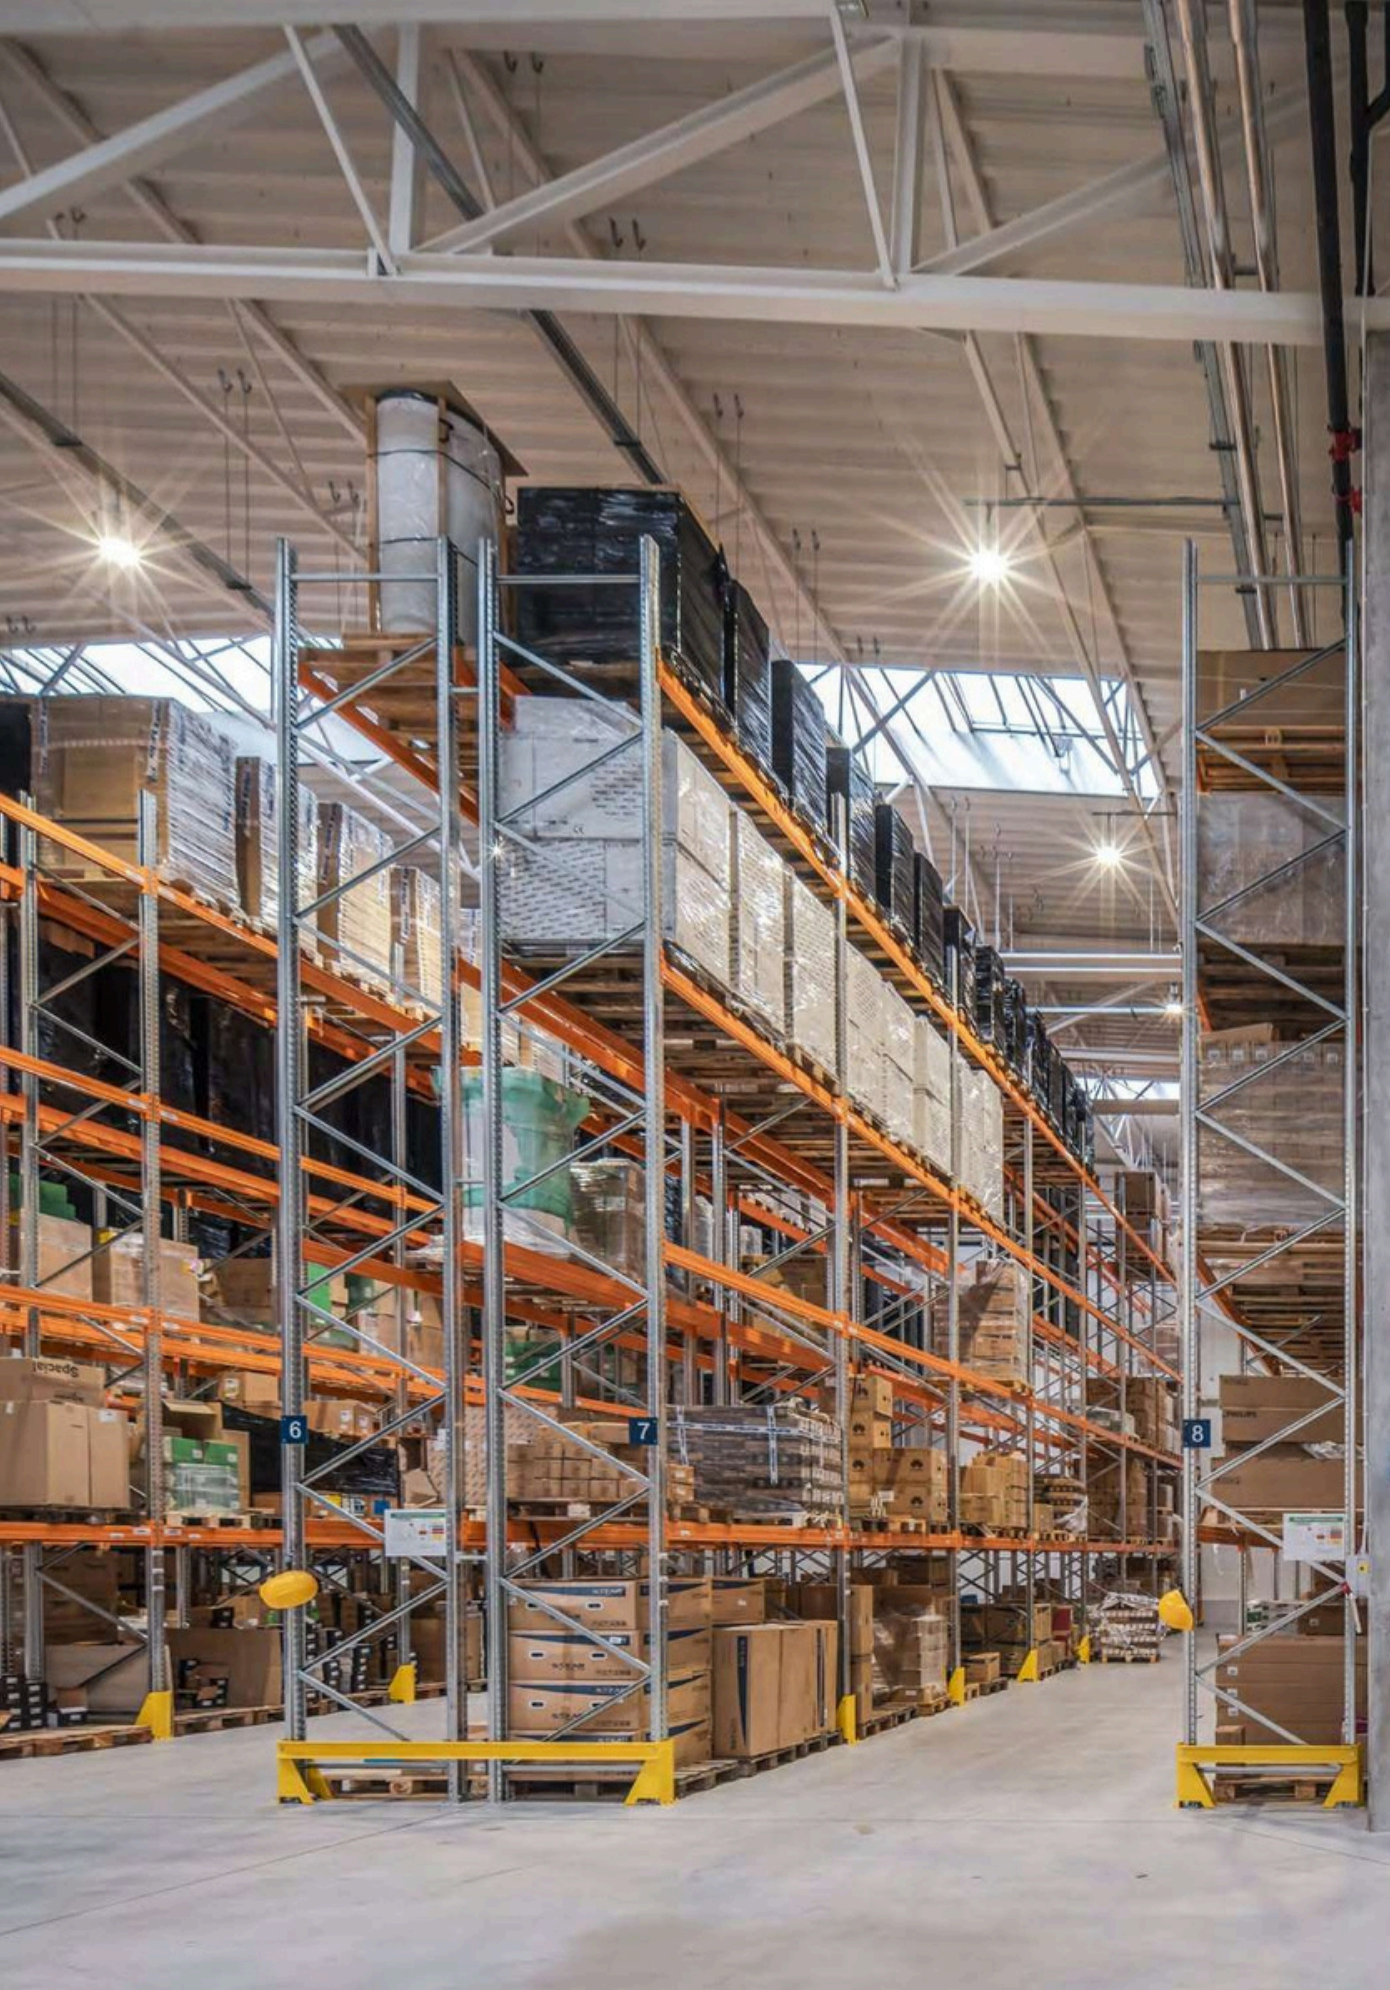

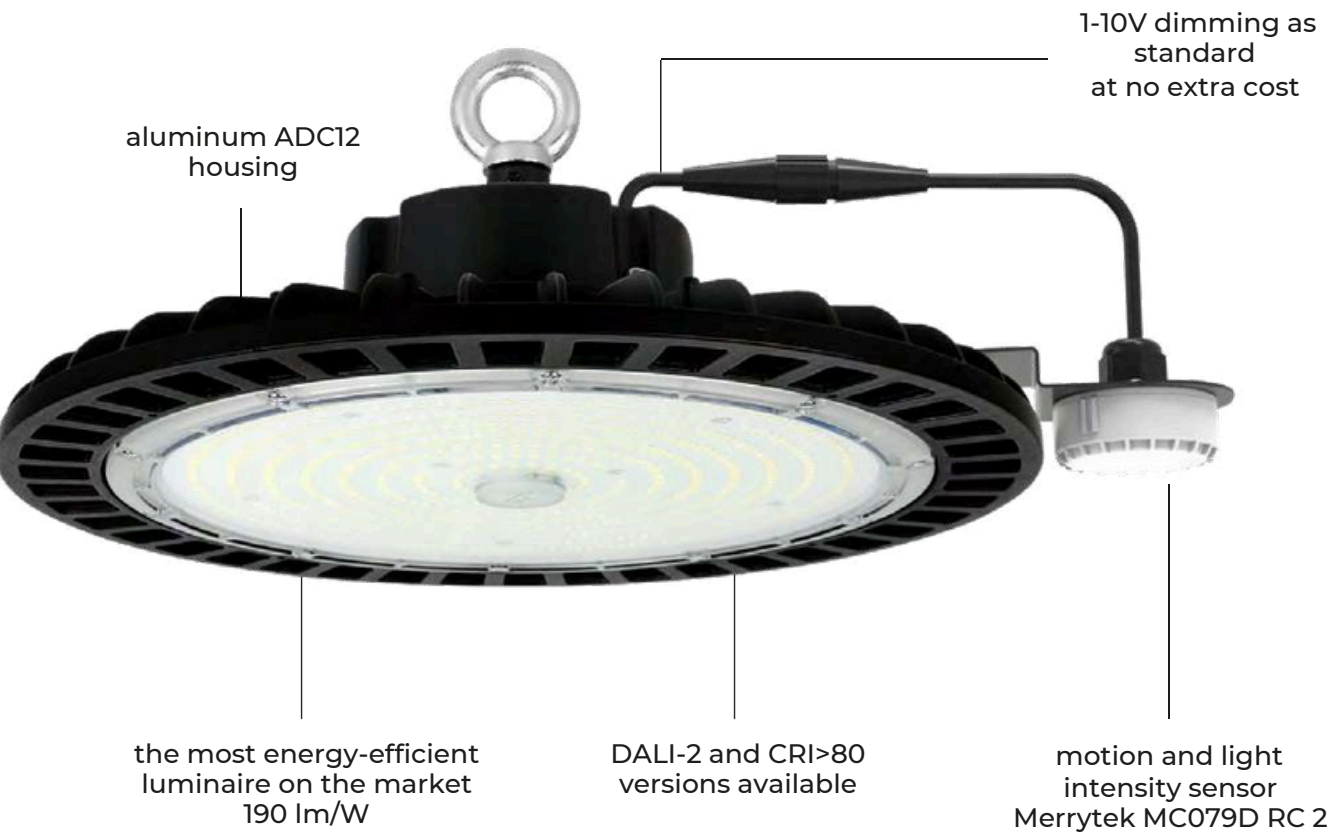

HIGH BAY PHANTOM

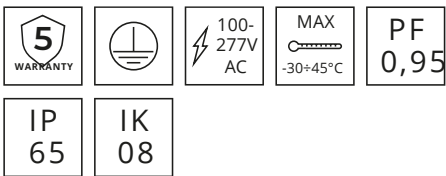

EFFICACY 190 lm/W
Power [W]:
70-200
Luminous flux [lm]:
13300-38000
Beam angle [°]:
60, 90, 120
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 100.000
Housing:
aluminium ADC12



Various mounting options

The PHANTOM high bay luminaire offers two mounting options: suspended and surface-mounted. A dedicated bracket attached to the fixture allows for direct installation on the ceiling or a steel beam in high-ceiling halls.



square handle available

Light distributions

Our modern luminaire provides excellent light distribution, ensuring optimal illuminance at various mounting heights. As the height increases and light intensity gradually decreases, the diameter of the illuminated area expands evenly.


Efficient lighting for large spaces – ideal for halls, warehouses, and industrial facilities.

Optimal light intensity – ensures work comfort and safety.


Application flexibility – suitable for both low and high mounting heights.




Luminous flux [lm]
28500, 38000
Beam angle:
60°

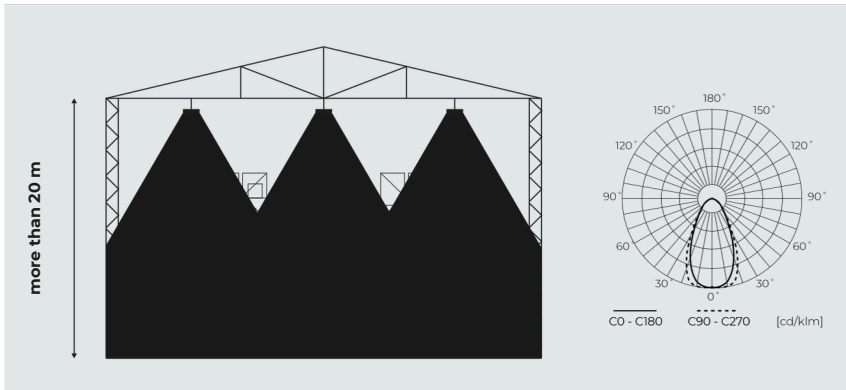

Luminous flux [lm]
19000, 28500
Beam angle:
90°

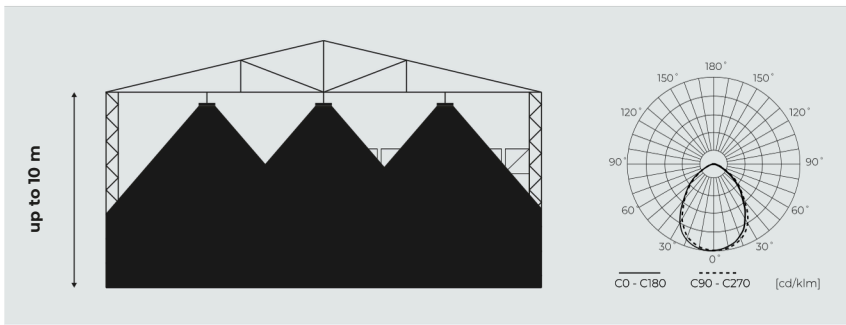

Luminous flux [lm]
13300
Beam angle:
120°

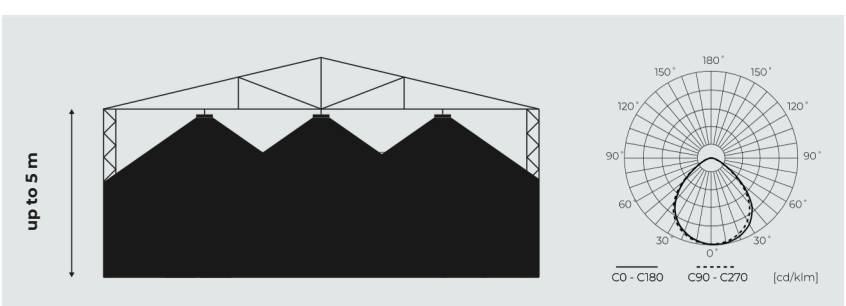




Motion sensor Merrytek MC079D RC 2

Phantom luminaire with built-in motion sensor by Merrytek, for the distribution of which we have exclusive rights, is a modern solution ideal for industrial facilities and large halls. The motion sensor automatically detects the presence of people or vehicles, activating lighting only when necessary. This significantly reduces energy consumption, resulting in lower operating costs.

Merrytek remote controller MH10

To configure the sensor, a Merrytek MH10 remote control is required to remotely control functions such as Motion Detection Range, Stand-by light level, Stand-by mode duration, the length of time the lamp is lit to the maximum when the sensor is not registering motion, daylight threshold to deactivate the sensor after sunrise (Daylight Harvesting), motion sensor sensitivity adjustment (High/Low). The remote control offers the ability to program three presets.

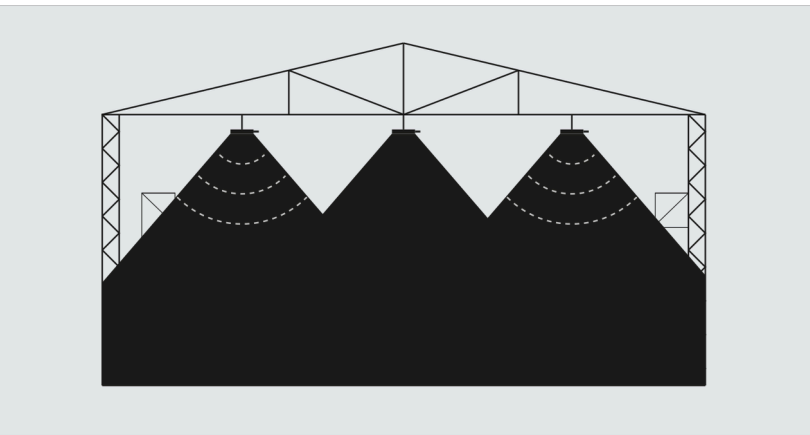

DALI-2 Power Supply for Industrial Luminaires is a modern digital lighting control system based on the open DALI-2 protocol. Enables precise control of individual luminaires or groups, ensures full device interoperability, and delivers reliable performance in demanding industrial environments.

Automation – integration with motion, daylight, and scheduling sensors allows real-time, automated light adjustment based on occupancy and ambient conditions.

Grouping and lighting scenarios – supports grouping of luminaires and assignment of lighting scenes, enabling flexible and efficient control in large-scale spaces.

Remote management and diagnostics – provides access to key luminaire data (voltage, temperature, operating hours) and fast fault detection via a central management system.


Energy savings and cost reduction – smart control and sensor-based dimming reduce energy usage by up to 60%, significantly lowering operational and maintenance costs.

High bay PHANTOM with motion sensor


SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
207028	New	100	60	4000	13300	A B
207011	New	100	90	4000	13300	
207004	New	100	120	4000	13300	



207059	New	150	60	4000	13300	A B
207042	New	150	90	4000	13300	
207035	New	150	120	4000	13300	



207080	New	200	60	4000	13300	A B
207073	New	200	90	4000	13300	
207066	New	200	120	4000	13300	




High bay PHANTOM universal bracket


SYMBOL		LENGTH [mm]	HOLE DIAMETER [mm]	HOLE SPACING [mm]
212190	New	115	11	20




DIMENSIONS [mm]



100W
motion sensor
207028
207011
207004




150W motion
sensor
207059
207042 207035

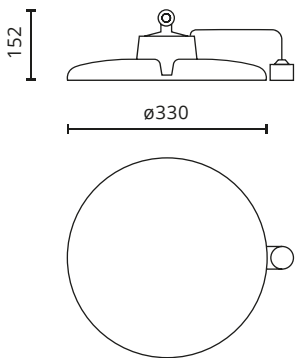


200W
motion sensor
207080
207073
207066


High bay PHANTOM

	SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	206601 New	70	60	4000	13300	A+G B
	206595 New	70	90	4000	13300	
	206588 New	70	120	4000	13300	
	203167	100	60	4000	19000	A+G B
	203150	100	90	4000	19000	
	203143	100	120	4000	19000	
	203198	150	60	4000	28500	A+G B
	203181	150	90	4000	28500	
	203174	150	120	4000	28500	
	203228	200	60	4000	38000	A+G B
	203211	200	90	4000	38000	
	203204	200	120	4000	38000	


DIMENSIONS [mm]

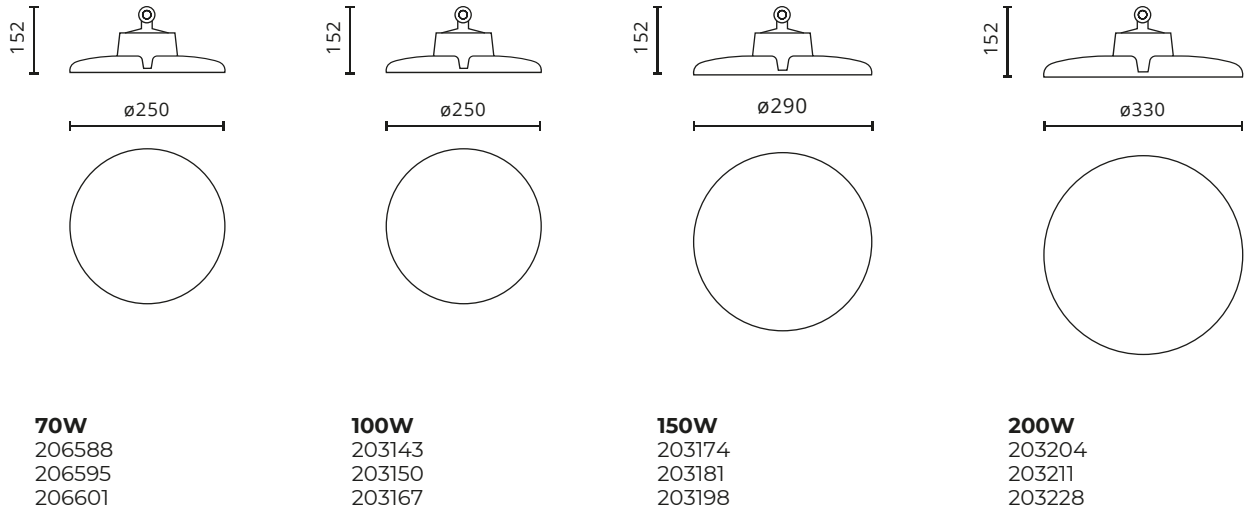


High bay PHANTOM CRI>80

	SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	216259 New	70	60	4000	12600	A+G B
	216228 New	70	90	4000	12600	
	216280 New	70	120	4000	12600	
	216525 New	100	60	4000	18000	A+G B
	216495 New	100	90	4000	18000	
	216556 New	100	120	4000	18000	
	216433 New	150	60	4000	27000	A+G B
	216402 New	150	90	4000	27000	
	216464 New	150	120	4000	27000	
	216341 New	200	60	4000	36000	A+G B
	216310 New	200	90	4000	36000	
	216372 New	200	120	4000	36000	


DIMENSIONS [mm]

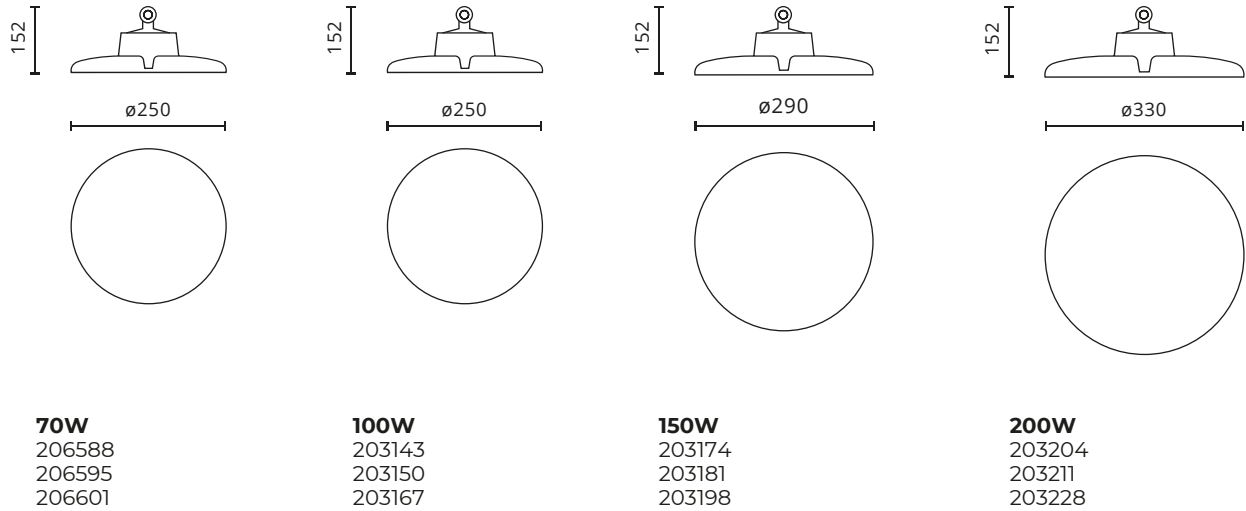


High bay PHANTOM DALI

	SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	216242 New	70	60	4000	13300	A+G B
	216211 New	70	90	4000	13300	
	216273 New	70	120	4000	13300	
	216518 New	100	60	4000	19000	A+G B
	216488 New	100	90	4000	19000	
	216549 New	100	120	4000	19000	
	216426 New	150	60	4000	28500	A+G B
	216396 New	150	90	4000	28500	
	216457 New	150	120	4000	28500	
	216334 New	200	60	4000	38000	A+G B
	216303 New	200	90	4000	38000	
	216365 New	200	120	4000	38000	


DIMENSIONS [mm]

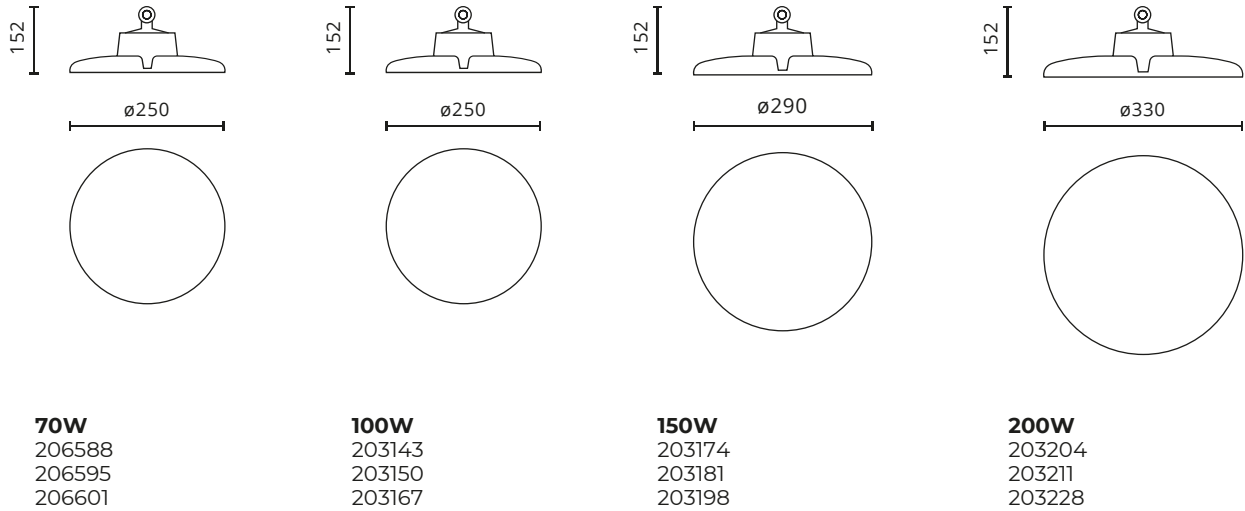

High bay PHANTOM DALI CRI>80

	SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	216266 New	70	60	4000	12600	A+G B
	216235 New	70	90	4000	12600	
	216297 New	70	120	4000	12600	
	216532 New	100	60	4000	18000	A+G B
	216501 New	100	90	4000	18000	
	216563 New	100	120	4000	18000	
	216440 New	150	60	4000	27000	A+G B
	216419 New	150	90	4000	27000	
	216471 New	150	120	4000	27000	
	216358 New	200	60	4000	36000	A+G B
	216327 New	200	90	4000	36000	
	216389 New	200	120	4000	36000	

DIMENSIONS [mm]

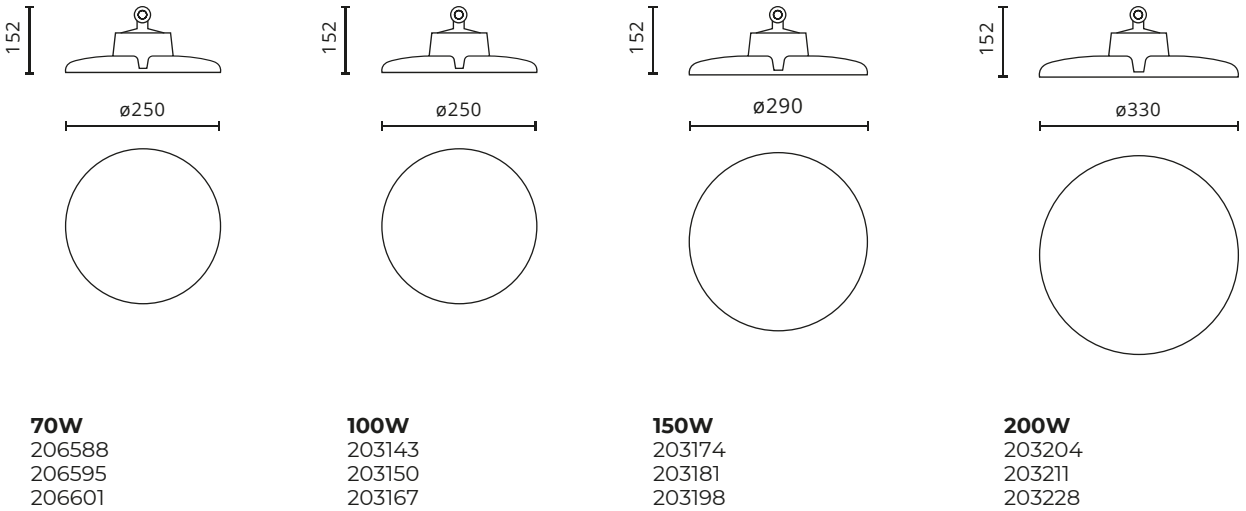



even and effective
light distribution

LUMILEDS
LEDs

polycarbonate
diffuser

HIGH BAY
RAIDER UFO

5
WARRANTY

100-277V
AC

MAX

-40÷45°C

PF
0,95

IP
65

IK
08

EFFICACY 130 lm/W
Power [W]:
100
Luminous flux [lm]:
13000
Beam angle [°]:
120
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 50.000
Housing:
aluminium ADC12




High bay RAIDER UFO




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
470935	100	120	4000	13000	

DIMENSIONS [mm]



100W
470935

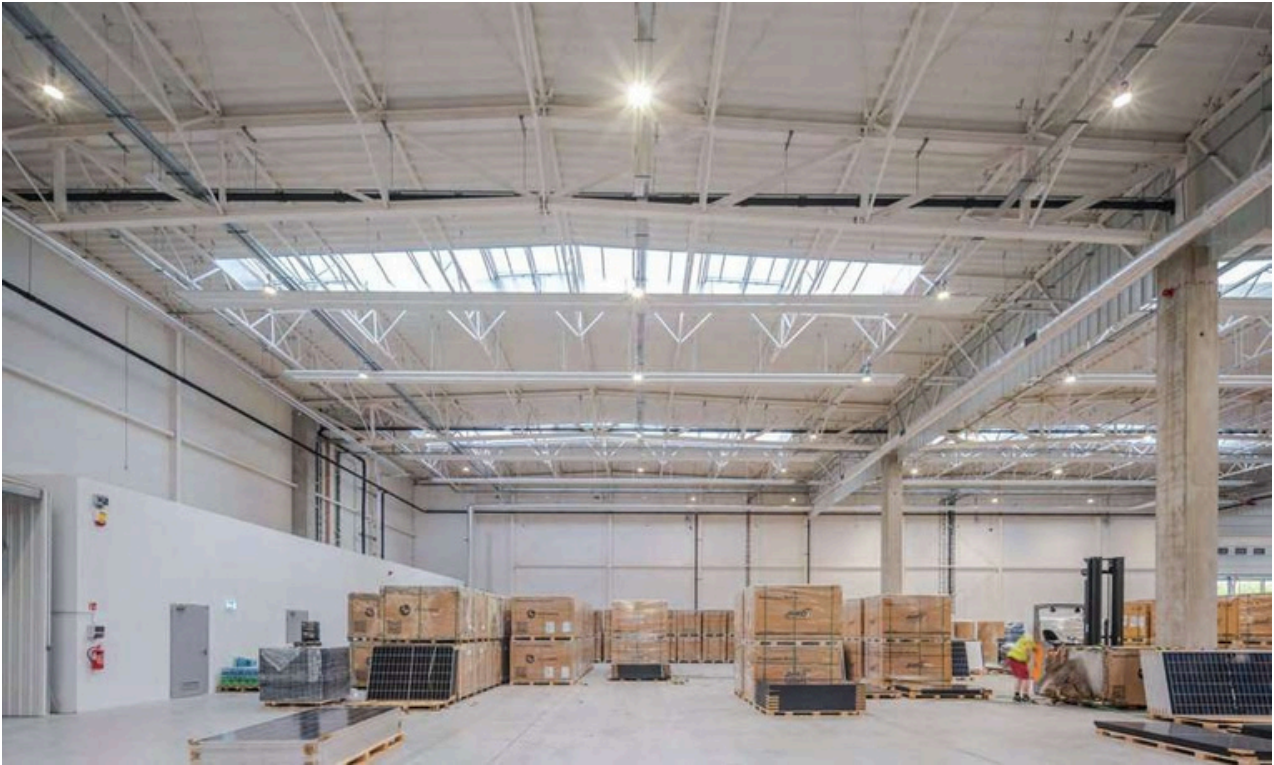

[View product page](#)

best price
on the market

cost-effective and
efficient lighting



tempered
glass

unique
design

robust
aluminium cast

HIGH BAY ECOBEBAM

3
WARRANTY

EFFICACY 100 lm/W
Power [W]:
100-200
Luminous flux [lm]:
10000-20000
Beam angle [°]:
110
Colour temperature [K]:
4000




Lifetime [h]:
L70B50 - 25.000
Housing:
aluminium ADC12



Light distributions
With a 110° beam angle and a luminous flux ranging from 10,000 to 20,000 lm, the ECOBEAM provides wide and efficient illumination, ideal for industrial facilities, warehouses, and large commercial spaces. The circular LED arrangement ensures even light distribution, minimizing shadows and eliminating dark spots. This design enhances visibility, safety, and working comfort, making it a perfect choice for environments requiring consistent and high-performance lighting.



Luminous flux [lm]
10000, 15000, 20000
Beam angle:
110°

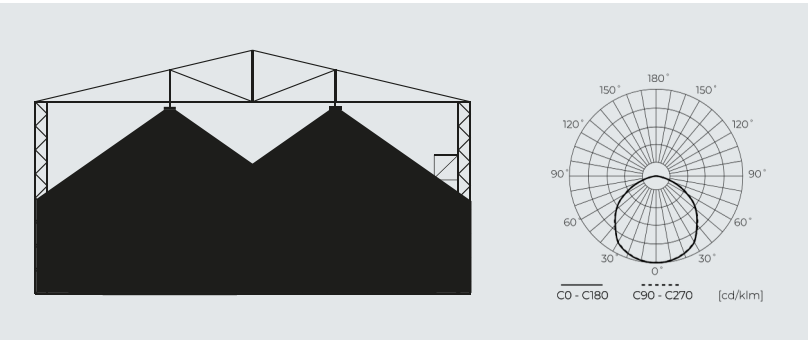


High bay ECOBEAM




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
203396	100	110	4000	10000	
203402	150	110	4000	15000	
203419	200	110	4000	20000	


DIMENSIONS [mm]




100W
244339




150W
203402



200W
203419

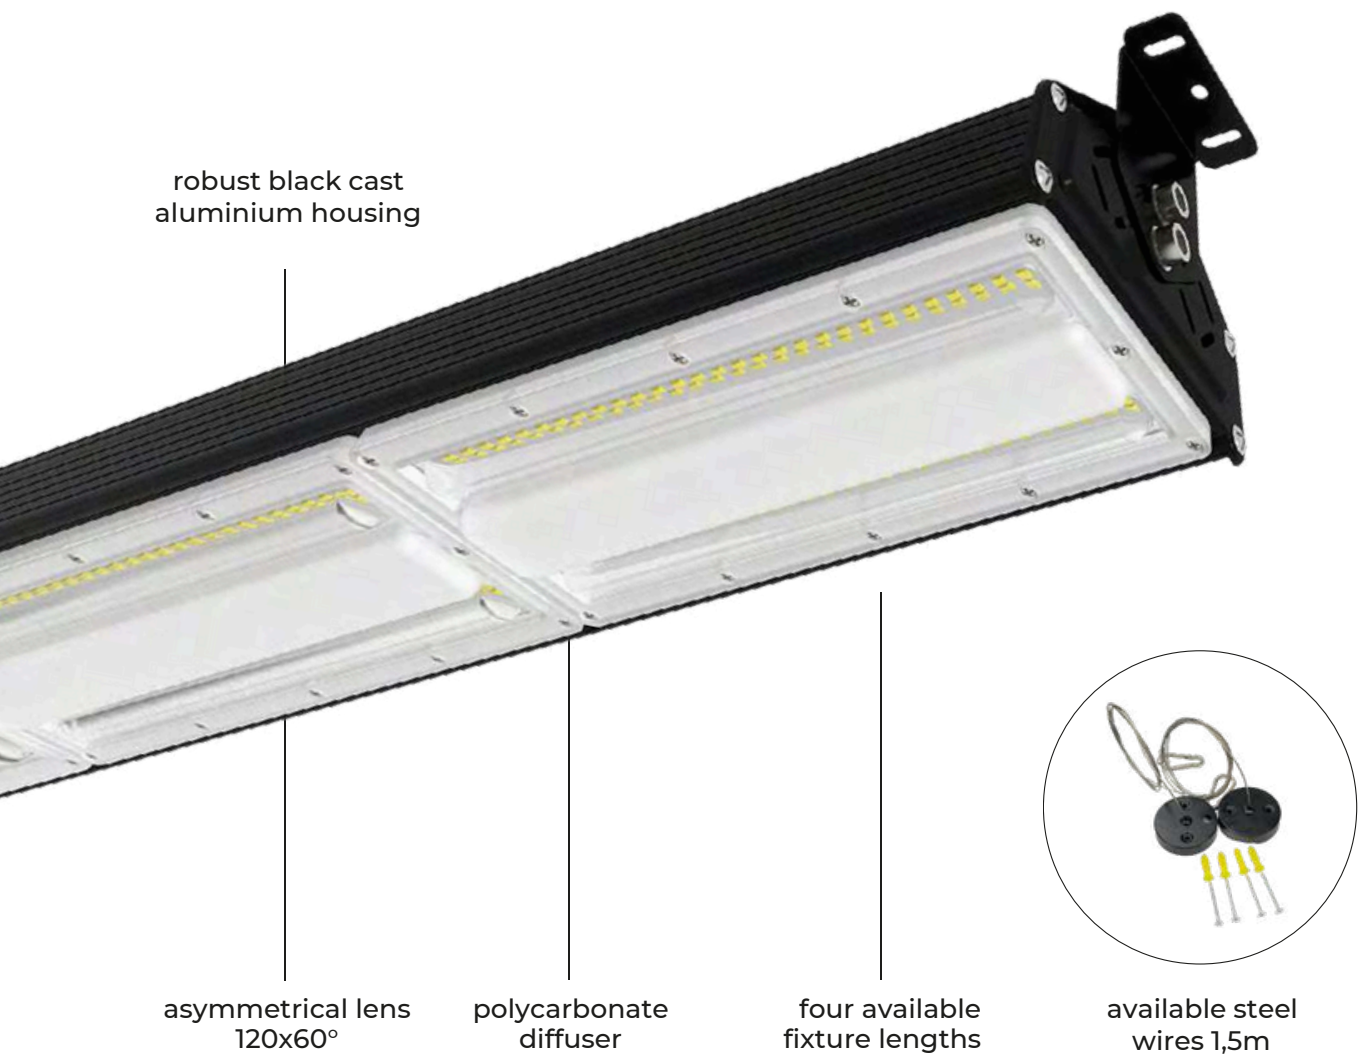

HIGH BAY STREAKBAY

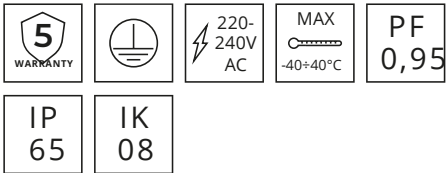

EFFICACY 100 lm/W
Power [W]:
50-200

Luminous flux [lm]:
5000-20000

Beam angle [°]:
120x60

Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 36.000

Housing:
aluminium ADC12




Luminous flux [lm]
5000, 10000,
15000, 20000

Beam angle:
120x60°

Light distributions

The length of a luminaire spread significantly impacts the light distribution in large spaces such as industrial halls, sports facilities, and other expansive facilities. A shorter luminaire, with a more concentrated beam spread, is better suited for areas that require more focused lighting or where precise illumination is needed. A longer luminaire allows for a wider spread of light, creating more uniform illumination across the space. This reduces shadow areas and ensures consistent lighting, making it ideal for large rooms or warehouses where broad, even coverage is essential.

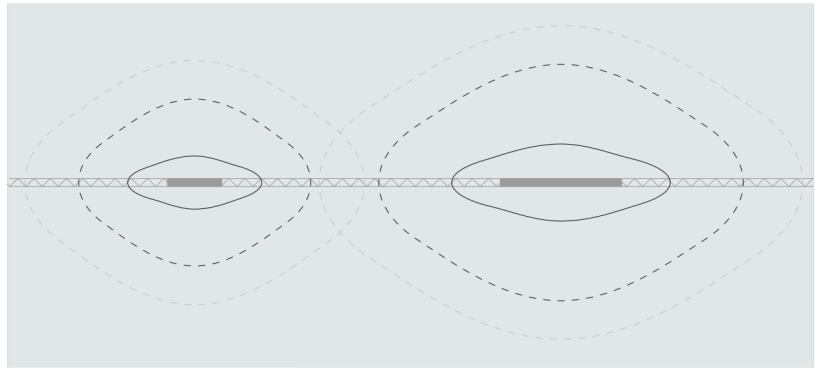


Our STREAKBAY linear High Bay luminaire with an asymmetric lens ensures precise light distribution, optimizing visibility in warehouses and production areas. The 120x60° beam pattern directs light efficiently, expanding coverage at greater heights while minimizing glare and energy loss.

Wide and directed lighting – 120° in one direction (wide) provides a broad light distribution, ideal for uniform illumination of large areas.

60° in the other direction (narrower) - focuses light along a narrow axis, reducing loss and increasing lighting efficiency


Optimal coverage in a linear arrangement – the lens is a perfect match for the High Bay linear luminaire, spreading the light along the rack runs, corridors or production lines.

Better visibility and comfort – Lower glare (UGR) less light falls towards people, improving comfort and safety. Better horizontal and vertical visibility, such as in high-bay warehouses.

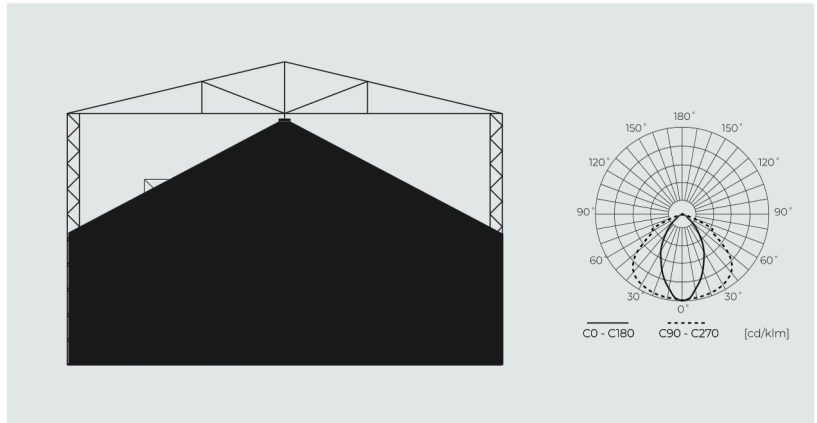

Flexible installation

STREAKBAY suspended mounting and includes brackets for installation on beams, ceilings, walls, and other structures in large halls.

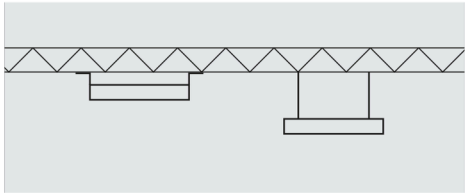

Versatile highbay lighting

Highbay luminaires in various lengths provide optimal illumination for large spaces, not just in industrial halls but also in warehouses and sports facilities. Flexible sizing ensures efficient lighting tailored to any environment.


50W

100W

150W





200W

By selecting the right fixture length, the lighting can be perfectly adapted to the space requirements. Shorter luminaires ensure even light distribution across large halls, reducing shadows and enhancing visibility. Meanwhile, longer fixtures are ideal for illuminating communication routes, production lines, and warehouse aisles, providing consistent and uninterrupted lighting exactly where it's needed.

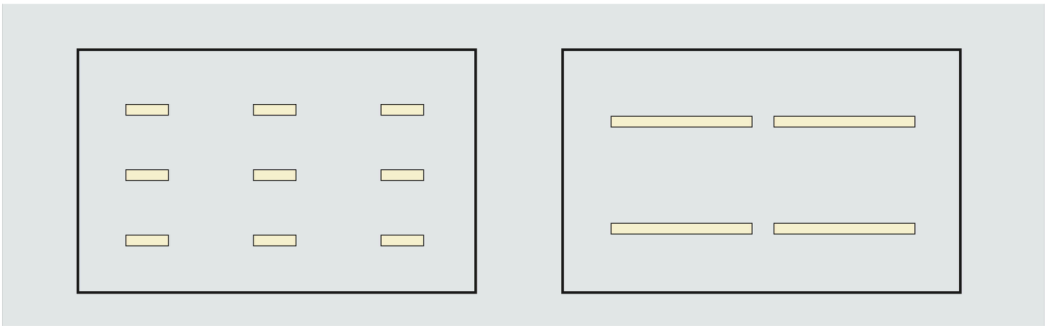


High bay STREAKBAY


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
206748	50	120x60	4000	5000	
206755	100	120x60	4000	10000	
206762	150	120x60	4000	15000	
206779	200	120x60	4000	20000	
206786	steel wires 1,5m				



DIMENSIONS [mm]



50W
206748




100W
206755




150W
206762




200W
206779

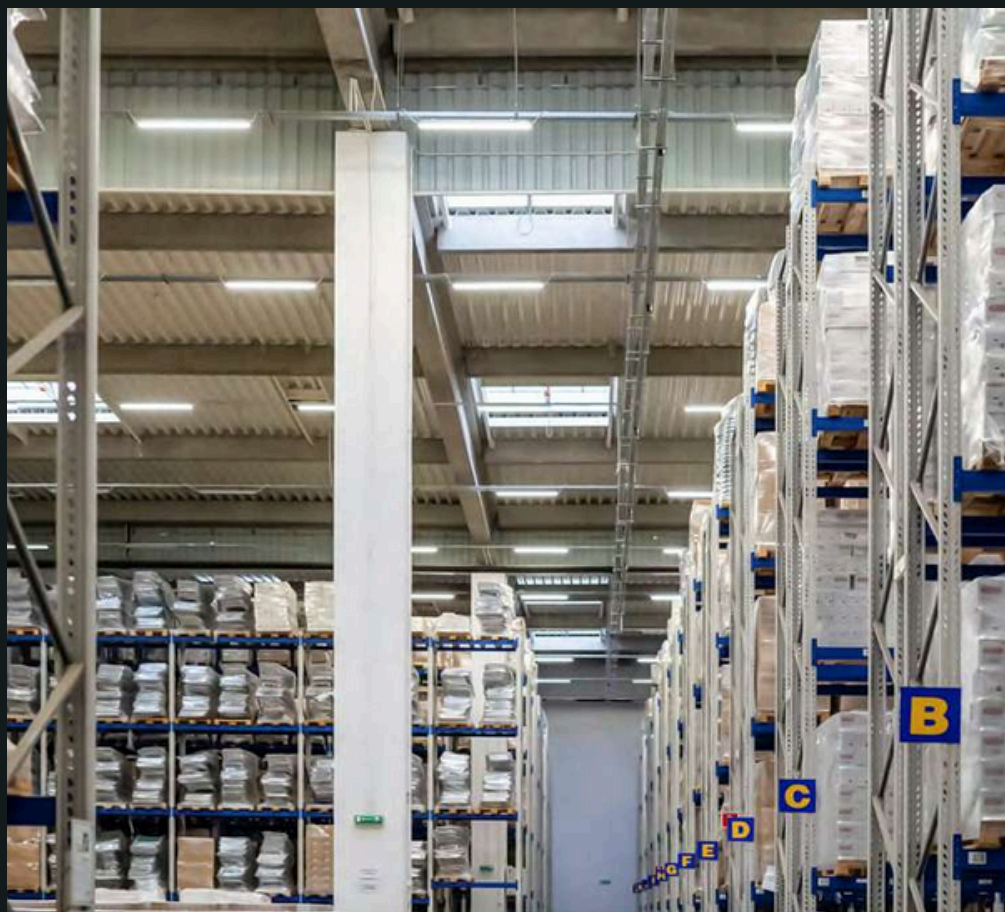

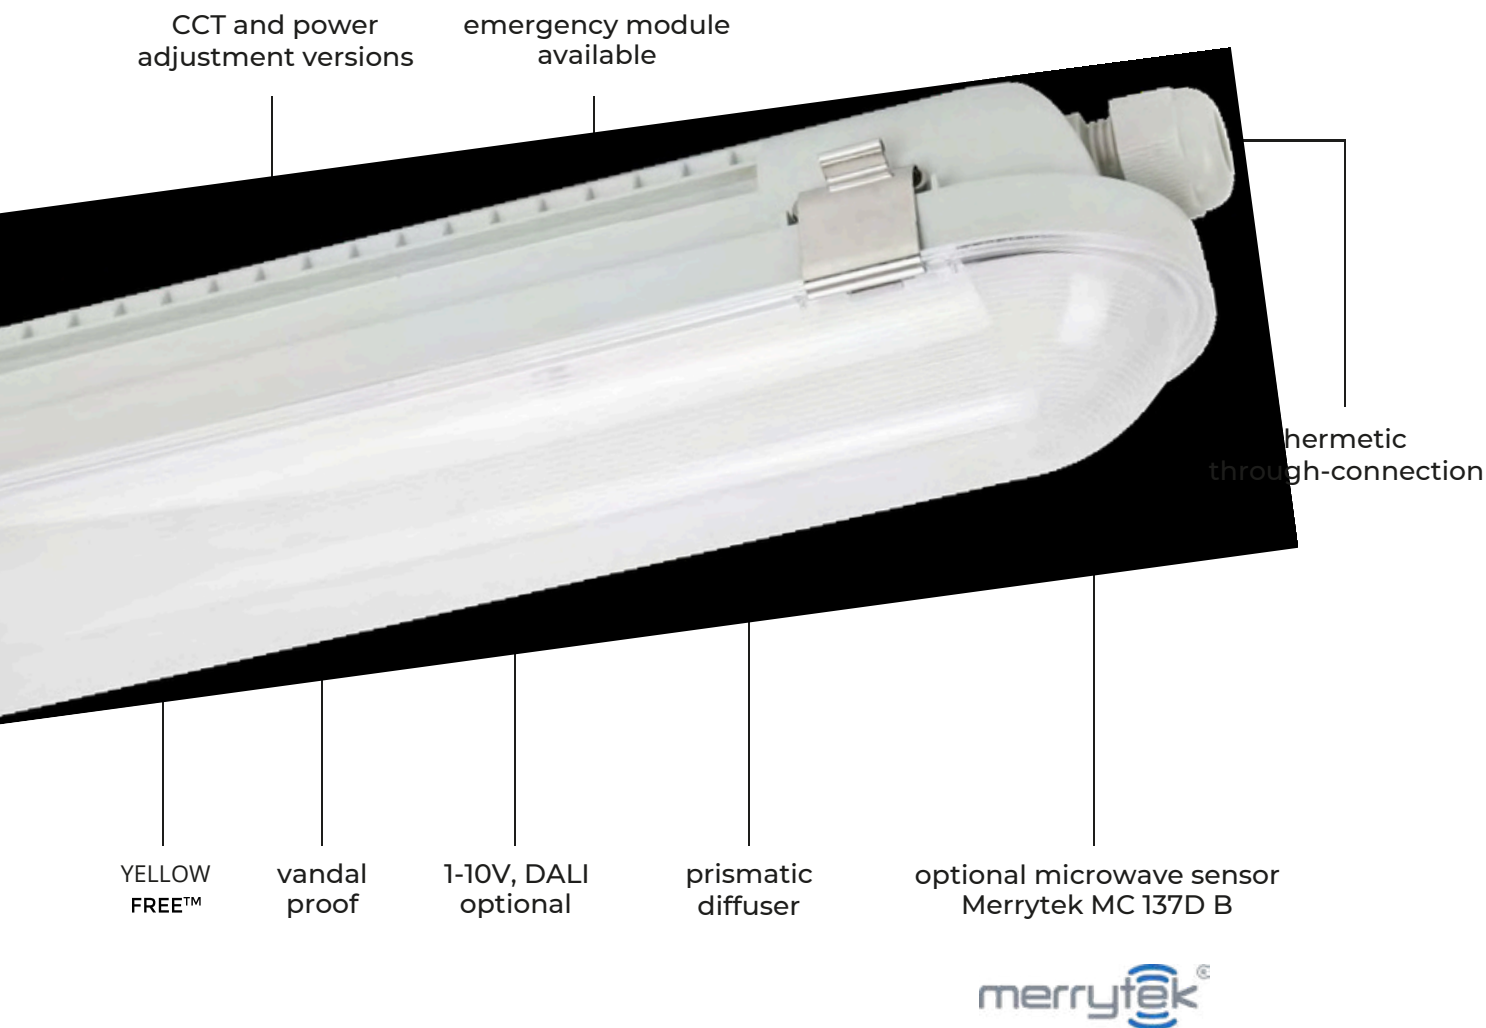

HERMETIC LUMINAIRE RANGER

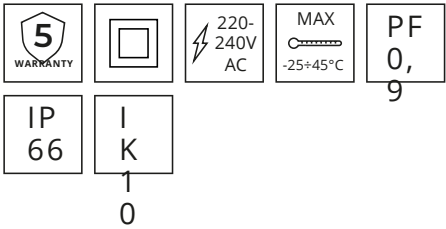

EFFICACY
150-180 lm/W
Power [W]:
10-80
Luminous flux [lm]:
5600-14400
Beam angle [°]:
120
Colour temperature [K]:



Lifetime [h]:
L70B50 - 100.000

Housing:
polycarbonate



IP
66

IK
10

Designed for extreme conditions

Our IP66 & IK10-rated luminaire RANGER is designed to withstand the harshest conditions. With complete protection against dust and powerful water jets (IP66) and high-impact resistance (IK10), it ensures reliable performance in demanding environments.

Ideal for industrial facilities, warehouses, parking garages, and outdoor applications, RANGER guarantees exceptional durability, safety, and efficiency even in the toughest conditions.

One luminaire, many possibilities


The RANGER hermetic luminaire has been equipped with a clip system, allowing quick and tool-free opening. This gives the user easy access to the interior, making it much easier to replace the power supply and install control systems such as DALI or emergency modules.



steel support
cable

space for control
systems

through-connection
coupling

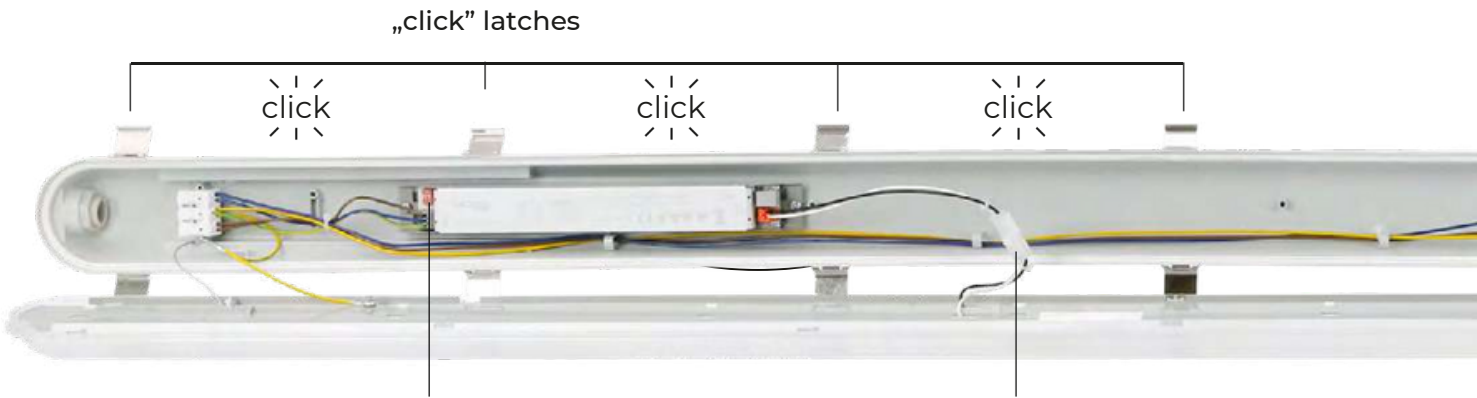

DIP switch for power adjustment



colour temperature
adjustment switch
3000-4000-5000K

Through-connection

Hermetic through-connection, which allows the creation of continuous, integrated light lines without the need for additional connectors and boxes. Thanks to its high tightness and resistance to outdoor conditions, the system performs well even in the most demanding environments, providing reliable lighting in harsh operating conditions.



Hermetic luminaire RANGER 180lm/W

SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEL
210189	New	10-40	120	3000-4000-5000 (CCT)	7200		A T G D
210196	New	10-40	120	3000-4000-5000 (CCT)	7200	●	
210226	New	25-55	120	3000-4000-5000 (CCT)	9900		A T G D
210233	New	30-55	120	3000-4000-5000 (CCT)	9900	●	
210264	New	60-80	120	4000	14400		A T G D
210271	New	60-80	120	4000	14400	●	




Hermetic luminaire RANGER CCT 150lm/W

210202	New	10-40	120	3000-4000-5000 (CCT)	6000		A T G D
210219	New	10-40	120	3000-4000-5000 (CCT)	6000	●	
210240	New	30-55	120	3000-4000-5000 (CCT)	8250		A T G D
210257	New	30-55	120	3000-4000-5000 (CCT)	8250	●	



Hermetic luminaire RANGER 1-10V 170lm/W


201262		40	120	4000	6800		A T G D
--------	--	----	-----	------	------	--	------------------




Hermetic luminaire RANGER 140lm/W

471109		40	120	4000	5600		A T G D
--------	--	----	-----	------	------	--	------------------


DIMENSIONS [mm]




40W
201262




40W
471109



10-40W
210189
210196
210202
210219




25-55W
210226
210233
210240
210257



60-80W
210264
210271



HERMETIC LUMINAIRE LINKER

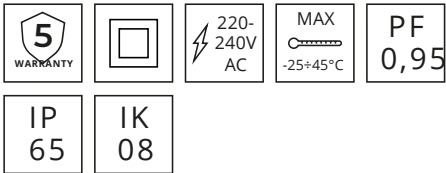

EFFICACY 150 lm/W
Power [W]:
21-80
Luminous flux [lm]:
3150-12000
Beam angle [°]:
120
Colour temperature [K]:




Lifetime [h]:
L70B50 - 100.000
Housing:
polycarbonate



Easy to connect

The LINKER luminaire is equipped with two-sided, tool-free access to the power connection, which allows for through-connection from both sides of the luminaire. This makes installation fast, convenient and requires no additional accessories, improving installation and allowing for easy creation of continuous lines of light.

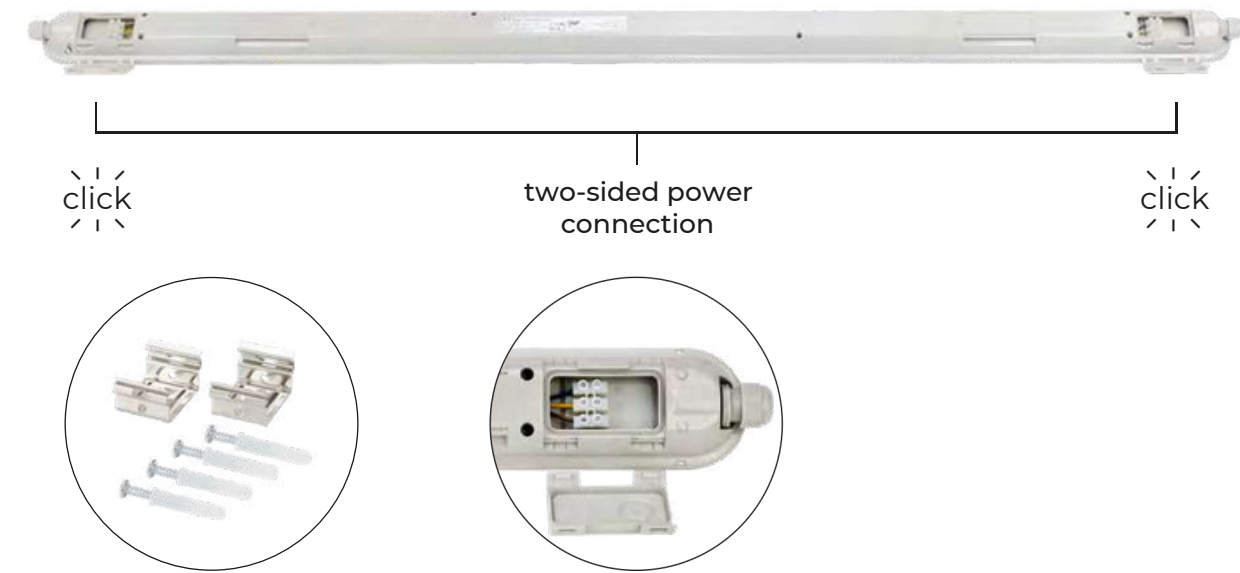

Light distributions


The LINKER hermetic luminaire, equipped with a 120° beam angle, ensures broad and even light distribution, making it the perfect choice for large, functional spaces. This wide-angle illumination minimizes shadows and enhances visibility, providing optimal working conditions in demanding environments.

Even and well-distributed lighting reduces eye strain, enhances concentration, and improves overall comfort, contributing to a safer and more productive workspace. Proper illumination also boosts employee well-being, reduces fatigue, and increases efficiency, making it a key factor in optimizing work performance in industrial and commercial settings.






Luminous flux [lm]
3150, 4500, 6000,
8250, 12000

Beam angle:
120°

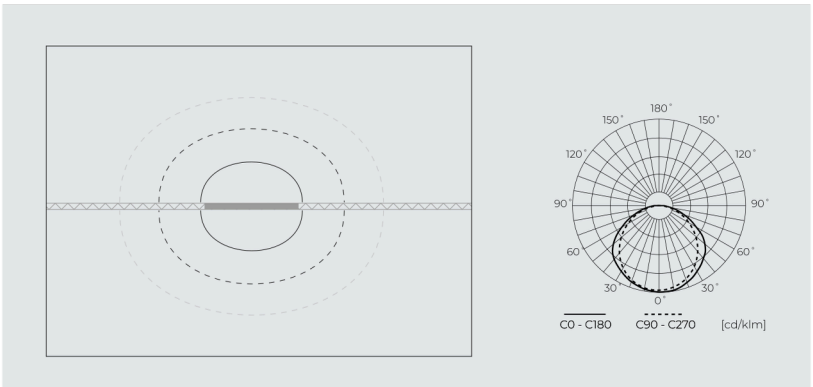

Through-connection


Hermetic through-connection, which allows the creation of continuous, integrated light lines without the need for additional connectors and boxes. Thanks to its high tightness and resistance to outdoor conditions, the system performs well even in the most demanding environments, providing reliable lighting in harsh operating conditions.

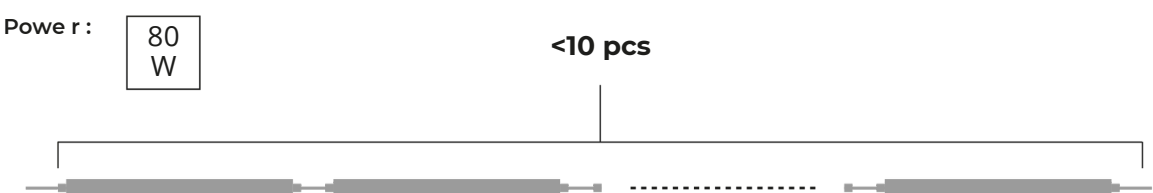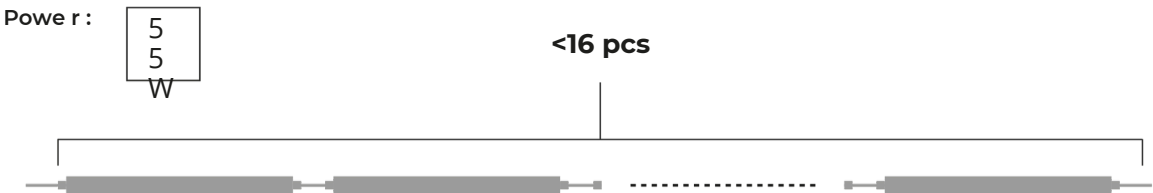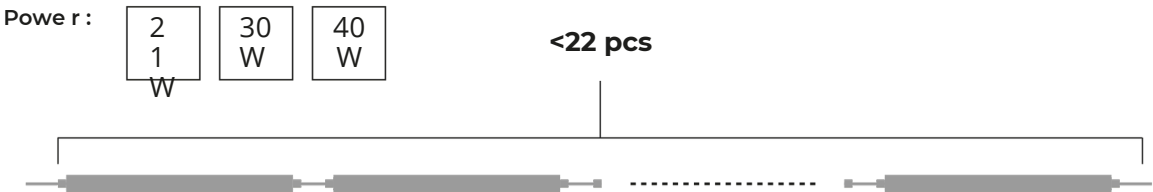

Hermetic luminaire LINKER

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EMERGENCY MODULE	EEL
479587	21	120	4000	3150		A t g D
479587-AW3HAT	21	120	4000	3150	●	
203709	30	120	4000	4500		A t g D
203709-AW3HAT	30	120	4000	4500	●	
479594	40	120	4000	6000		A t g D
479594-AW3HAT	40	120	4000	6000	●	
201279	40	120	5000	6000		
203754	40	120	4000	6000		A t g D
203754-AW3HAT	40	120	4000	6000	●	
479600	55	120	4000	8250		A t g D
479600-AW3HAT	55	120	4000	8250	●	
201057	80	120	4000	12000		A t g D
201057-AW3HAT	80	120	4000	12000	●	


DIMENSIONS [mm]




21W
479587
479587-AW3HAT

30W / 40W
203709
203709-AW3HAT
479594
479594-AW3HAT
201279

55W / 80W
479600
479600-AW3HAT
201057
201057-AW3HAT

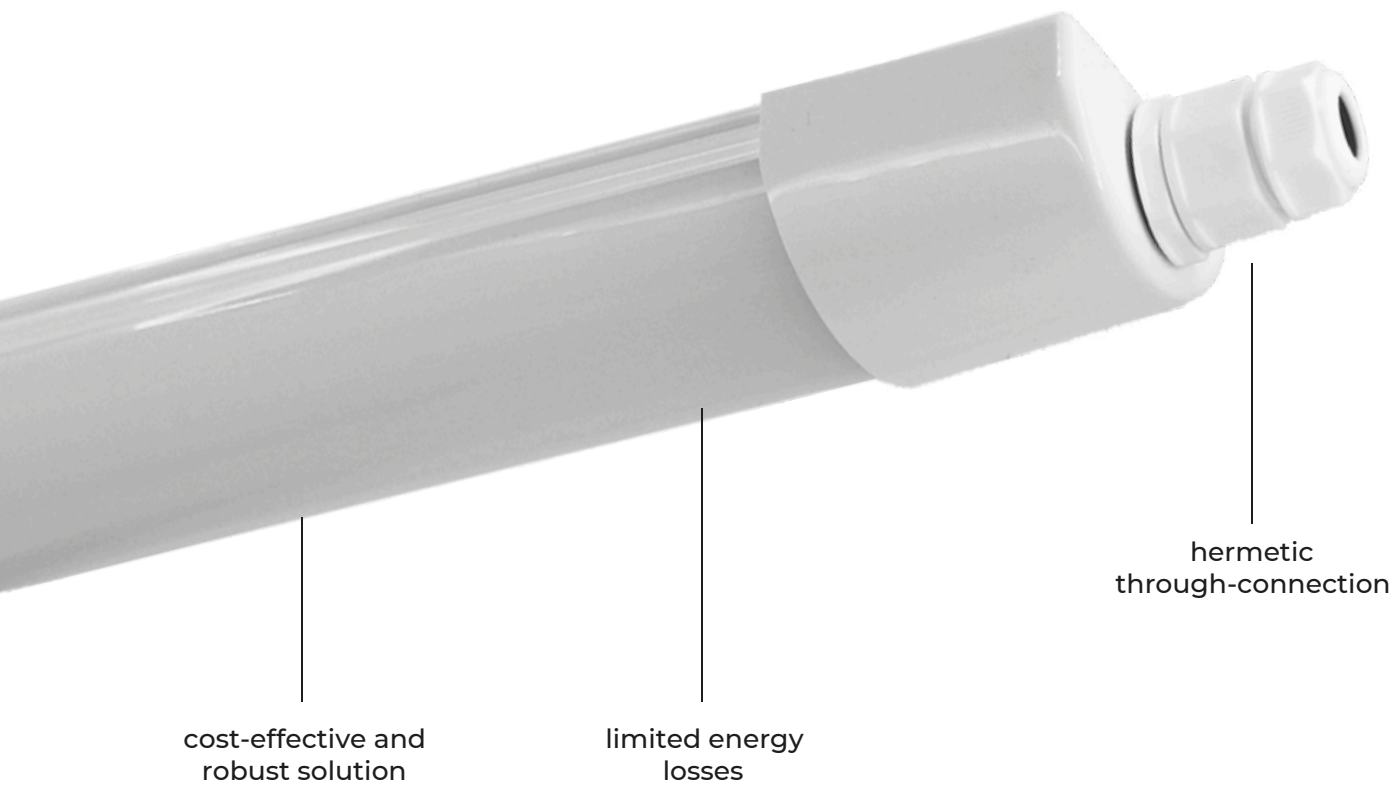

HERMETIC LUMINAIRE
LINIX

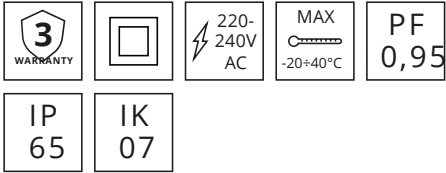

EFFICACY 120 lm/W
Power [W]:
36-45
Luminous flux [lm]:
4320-5400
Beam angle [°]:
120
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 20.000
Housing:
polycarbonate



Fast connector
Easy installation with solid protection against dust
and moisture—perfect for demanding conditions.




Hermetic luminaire LINIX




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
211605	36	120	4000	4320
211612	45	120	4000	5400

DIMENSIONS [mm]



36W
211605



45W
211612




cost-effective and
robust solution

available with
PIR sensor

vandal
proof

high ingress protection
and quick connection

HERMETIC LUMINAIRE
TRI-PROOF

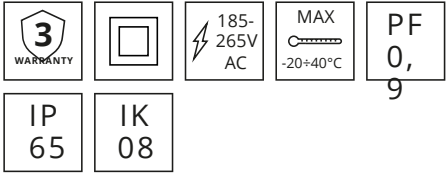

EFFICACY 120 lm/W

Power [W]:
30-90
Luminous flux [lm]:
3600-10800
Beam angle [°]:
120
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 30.000
Housing:
polycarbonate



Fast connector
Easy installation with solid protection against dust
and moisture—perfect for demanding conditions.




Hermetic luminaire TRI-PROOF


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEL
477606	30	120	4000	3600		
477644	30	120	4000	3600	●	
477613	40	120	4000	4800		
477651	40	120	4000	4800	●	
477620	70	120	4000	8400		
477637	90	120	4000	10800		




DIMENSIONS [mm]



30W
477606
477644



40W / 70W
477613
477651
477620



90W
477637



HERMETIC LUMINAIRE VANTA

3
WARRANTY

IP
65

IK
06

220-240V
AC

MAX
-10÷40°C

Compatible source:
T8 LED


Lenghts [cm]:
60, 120, 150

Diffuser:
polistyren (PS)


Housing:
ABS

[View product page](#)

VANTA for one T8 source

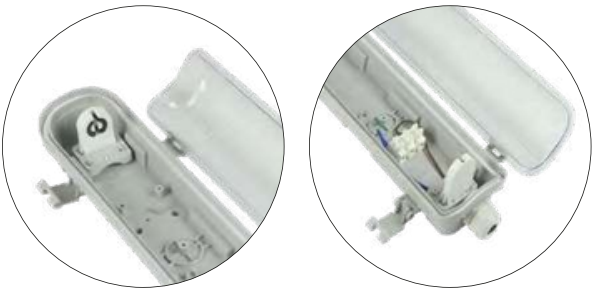

VANTA for two T8 sources

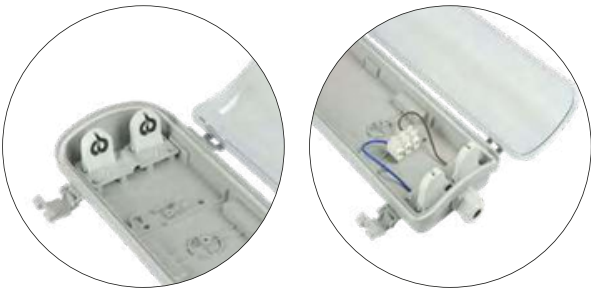


Hermetic luminaire VANTA empty




SYMBOL	SOURCE	LENGTH [cm]
203860 -II	T8x1	60
203877-II	T8x2	60
203884 -II	T8x1	120
203891-II	T8x2	120
203907-II	T8x1	150
203914 -II	T8x2	150


DIMENSIONS [mm]



VANTA 60cm
203860 -II
203877-II



VANTA 120cm
203884 -II
203891-II



VANTA 150cm
203907-II
203914 -II

LED line

PARK LUMINAIRES

NOLINA
82

PARKLITE
86

ROAD LUMINAIRES

ELIDA
90

CAMINO
94

FLAMINGO
98

STREETLITE
102

SPLIT POLE
104

SOLAR ROAD LUMINAIRES

SUNSTREET
110

minimalized upward
light emission & pollution

modern
minimalist design

durable die-cast
aluminium

mounting on pole Ø60

PARK LUMINAIRE
NOLINA

MAX



EFFICACY 150 lm/W
Power [W]:
30-60
Luminous flux [lm]:
4500-9000
Beam angle [°]:
100
Colour temperature [K]:
4000

Lifetime [h]:
L70B50 - 70.000
Housing:
aluminium

LUMILEDS
LEDs

polycarbonate
diffuser

Light distributions

The NOLINA luminaire features a wide 100° light distribution, providing soft, uniform illumination ideal for pedestrian zones, parks, and urban pathways. Its elegant, conical design not only ensures effective light diffusion over a broad area, but also adds a visually appealing architectural accent to any outdoor space.

Wide and even light distribution – optimal ground coverage without shading effect, ideal for public spaces.


Low light pollution – optics combined with shape in the luminaire significantly reduce upward light emissions.

Light efficiency and visual comfort – high quality of light provides safe and aesthetically pleasing lighting while saving energy.

Application – parks and green areas, urban squares and plazas, walking paths, housing estates, surroundings of various facilities.



Luminous flux [lm]
4500, 9000
Beam angle:
100°

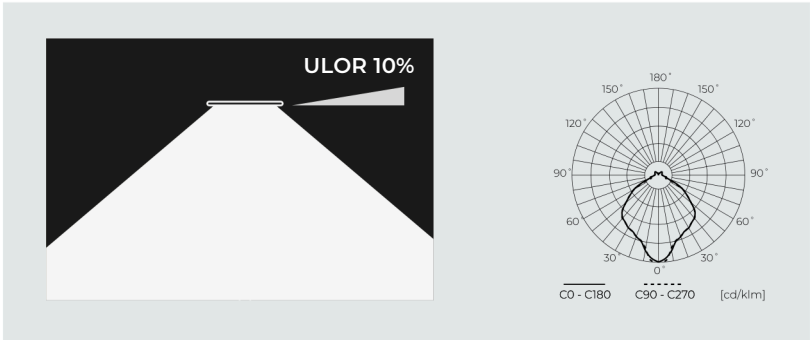



Park luminaire NOLINA




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
207127	30	100	4000	4500	A C
207134	60	100	4000	9000	


DIMENSIONS [mm]

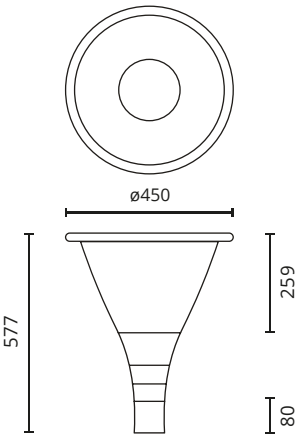

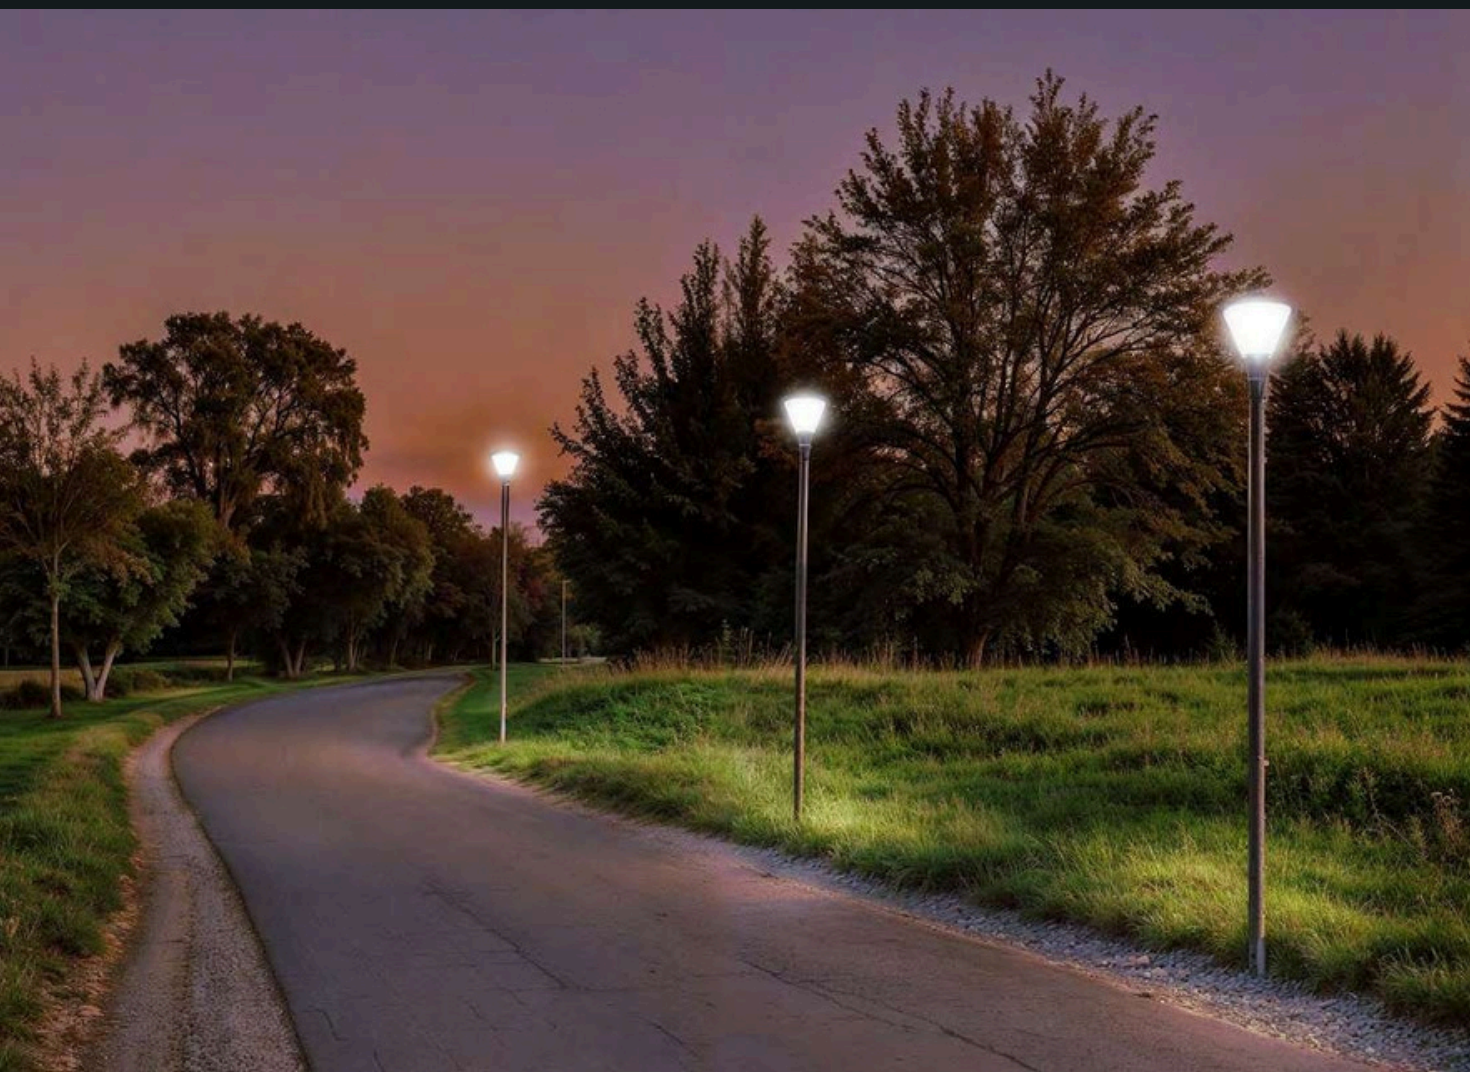

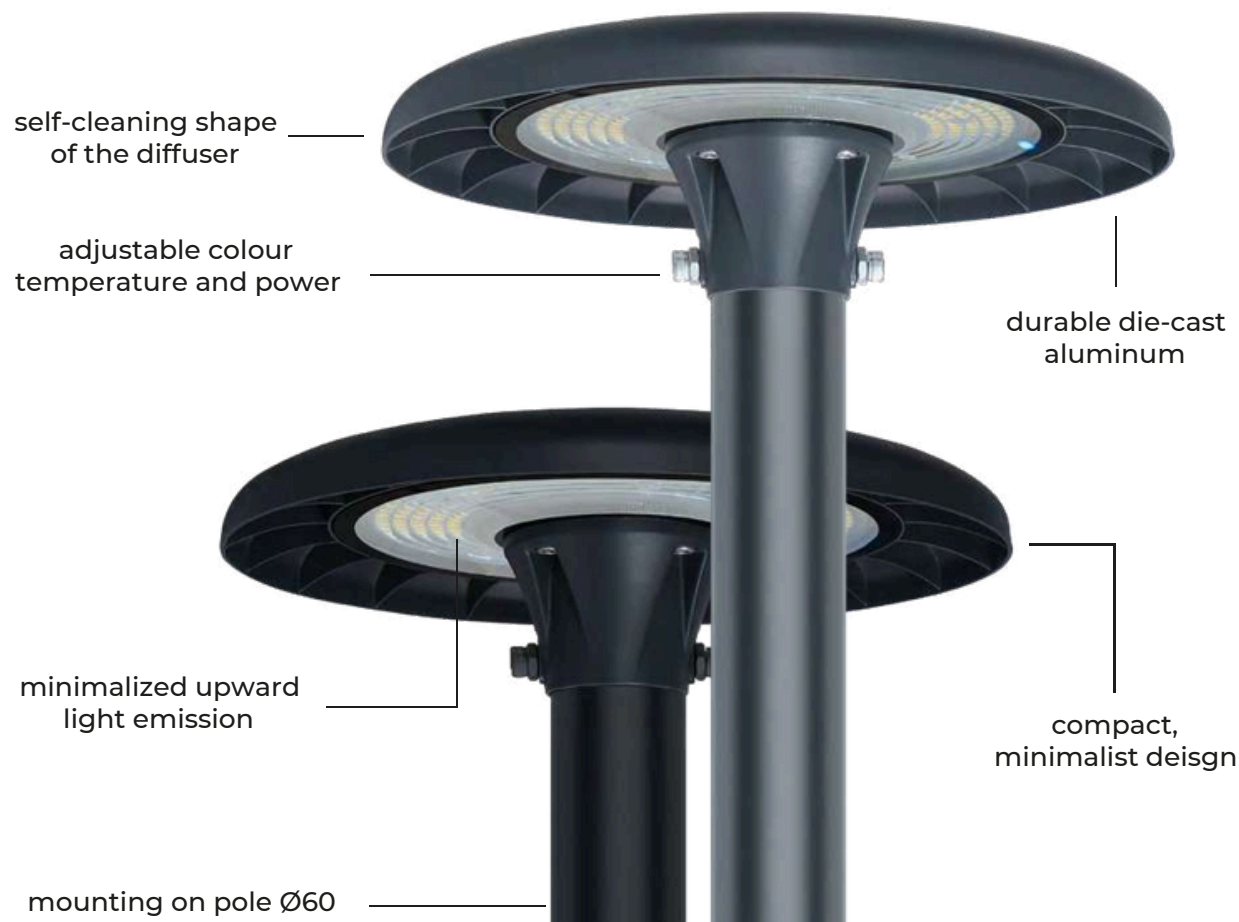

PARK LUMINAIRE PARKLITE

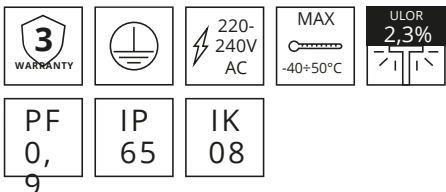

EFFICACY 120 lm/W

Power [W]:
50, 50-80-100, 80-100-120

Luminous flux [lm]:
6000-14400

Beam angle [°]:
100

Colour temperature [K]:



Lifetime [h]:
L70B50 - 25.000

Housing:
aluminium



Light distributions

The PARKLITE luminaire features a wide light distribution, designed to provide soft, uniform illumination across open areas. Its optical system ensures balanced lighting without harsh contrasts.

Optimized lighting coverage – effective illumination of both central and side zones with minimal light loss.


No light pollution – the luminaire has a ULOR factor of 2,3%, which translates into no glare or light loss.

Application – parks and green areas, urban squares, pedestrian zones, housing estates, recreational areas.




Luminous flux [lm]
6000, 6000-12000, 8000-14400

Beam angle:
100°

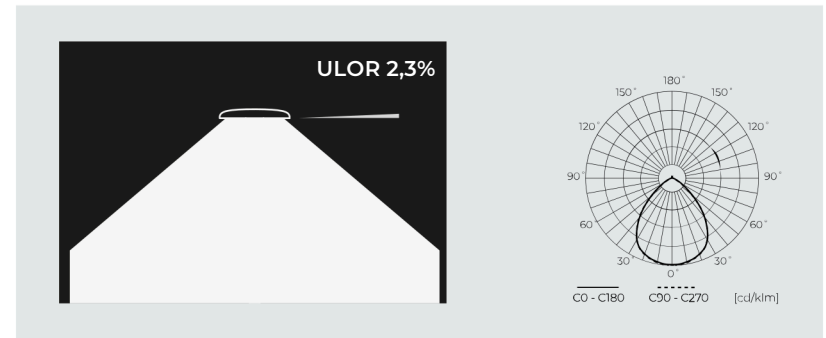

CCT and power adjustment

Selected models of the PARKLITE luminaire allow adjustment of power and colour temperature using two switches located under the top mounting spigot. Settings should be configured before installing the luminaire on the pole. Available adjustment ranges include 3000-4000-6000K for colour temperature and 50-80-100W or 80-100-120W, depending on the luminaire version.

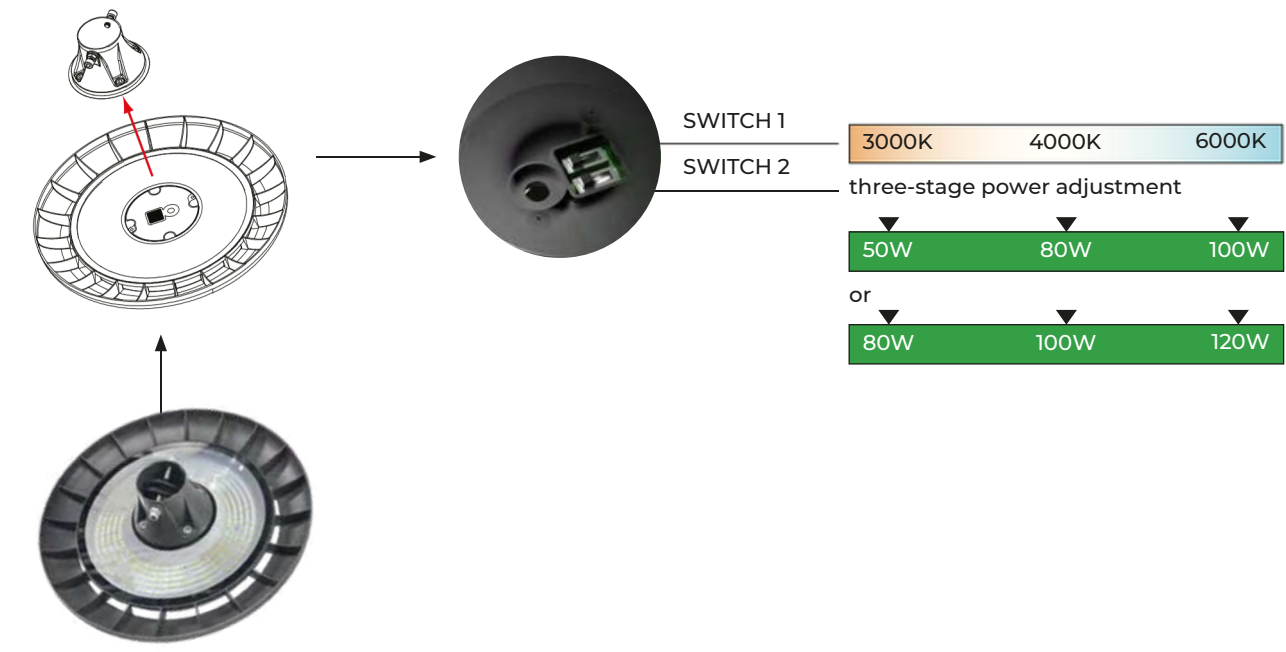

Park luminaire PARKLITE black

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
207486	50	100	3000-4000-6000 (CCT)	6000	A T G E
207462	50-80-100	100	3000-4000-6000 (CCT)	6000-12000	
207479	80-100-120	100	3000-4000-6000 (CCT)	8000-14400	




Park luminaire PARKLITE grey

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
209848	50	100	3000-4000-6000 (CCT)	6000	A T G E
209824	50-80-100	100	3000-4000-6000 (CCT)	6000-12000	
209831	80-100-120	100	3000-4000-6000 (CCT)	8000-14400	



DIMENSIONS [mm]



PARKLITE	
207486	209848
207462	209824
207479	209831





ROAD LUMINAIRE
ELIDA

100-277V
AC

5
WARRANTY

MAX

-40+50°C

ULOR

0%

PF

0,95

IP

65

IK

08

EFFICACY 120 lm/W

Power [W]:
4 0 -70

Luminous flux [lm]:
4800-8400

Beam angle [°]:
70x155

Colour temperature [K]:
4000

Lifetime [h]:
L70B50 - 50.000

Housing:
aluminium

Light distributions

The luminaire is equipped with a T3 lens delivering an asymmetric 70×155° light distribution, specifically engineered for linear and longitudinal lighting applications. This optical design ensures precise illumination along roadways, walkways, and perimeter areas, providing high uniformity and reduced light spill beyond the target zone.

Focused light – surface illumination while limiting light emission in undesirable directions.


No light pollution – the luminaire has a ULOR factor of 0%, which translates into no glare or light loss.

Application – urban and residential streets, local roads, parking areas, recreational areas, building surroundings.




Luminous flux [lm]
4800, 8400

Beam angle:
70x155°

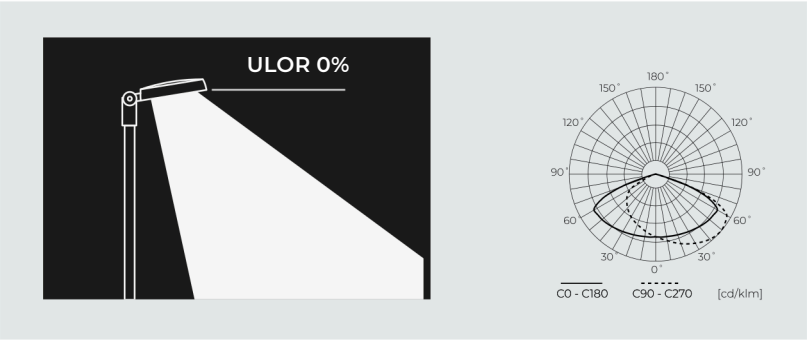


Road luminaire ELIDA

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
475473	40	70x155	4000	4800	
478498	70	70x155	4000	8400	



DIMENSIONS [mm]

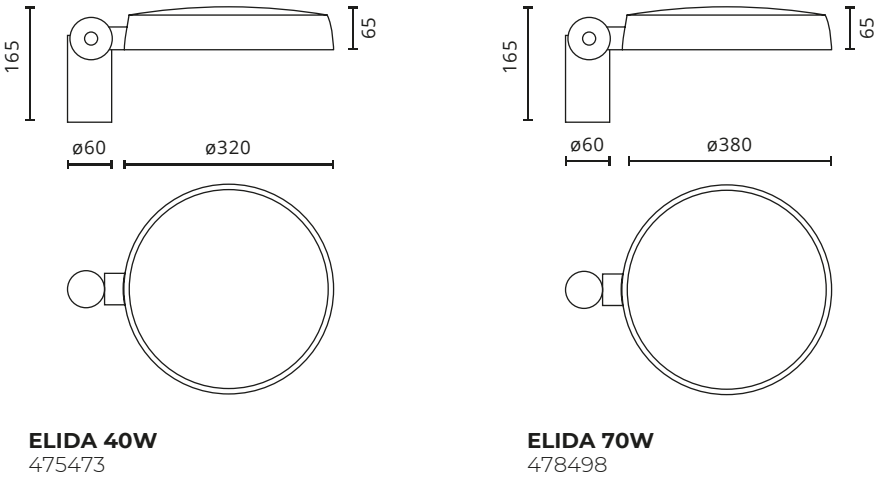



durable die-cast aluminum

surge protection 10kV

possibility to equip with ZHAGA




tempered glass



LUMILEDS LEDs

mounting on pole Ø60


angle adjustment
+/-15°

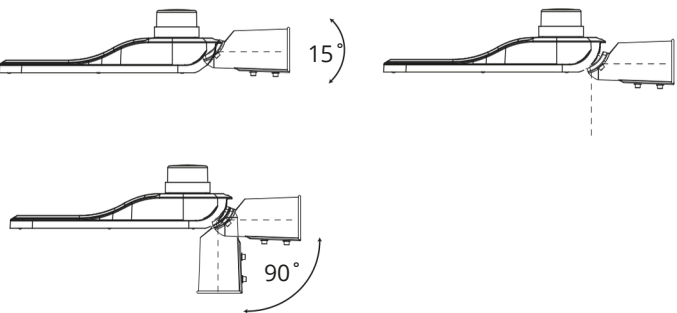

ROAD LUMINAIRE CAMINO

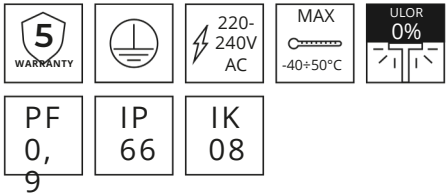

EFFICACY 140 lm/W
Power [W]:
50-200
Luminous flux [lm]:
6500-28000
Beam angle [°]:
150x110 (T2M)
Colour temperature [K]:



Lifetime [h]:
L70B50 - 100.000
Housing:
aluminium

Light distributions

The luminaire features a wide asymmetric 150x110° light distribution, designed for high-performance illumination of extensive outdoor areas. Its advanced optical system ensures uniform and efficient light coverage, minimizing glare and optimizing visibility across large surfaces such as roads, parking lots, or open public spaces.

Illumination of usable areas – without unnecessarily wasting light output outside the lighting area.

ZHAGA – CAMINO luminaire can be equipped with a standard ZHAGA interface, which allows easy integration with modern control and lighting automation systems.

No light pollution – the luminaire has a ULOR factor of 0%, which translates into no glare or light loss.

Application – urban and residential streets, single and dual carriageways, parking areas, industrial areas, housing estates and community areas.



Luminous flux [lm]
6500, 7000, 9800, 13000,
14000, 21000, 28000
Beam angle:
150x110°



Road luminaire CAMINO




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
206564	50	150x110	3000	6500	
203105	50	150x110	4000	7000	
216792	70	150x110	4000	9800	




206571	100	150x110	3000	13000	
203112	100	150x110	4000	14000	

DIMENSIONS [mm]



CAMINO 50/70W
206564
203105
216792



CAMINO 100W
206571
203112

Road luminaire CAMINO




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
203129	150	150x110	4000	21000	




203136	200	150x110	4000	28000	
--------	-----	---------	------	-------	--

DIMENSIONS [mm]





CAMINO 150W
203129

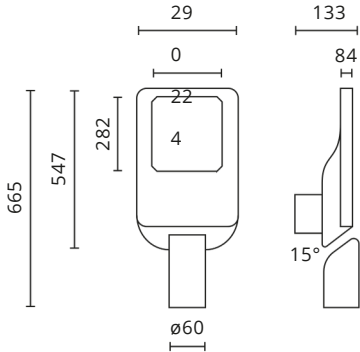

CAMINO 200W
203136



ROAD LUMINAIRE FLAMINGO

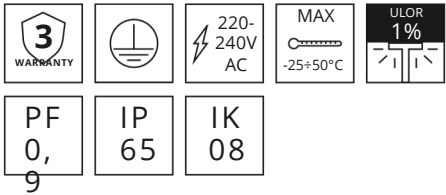

EFFICACY 120 lm/W

Power [W]:
30-100

Luminous flux [lm]:
3000-10000

Beam angle [°]:
14 0x70

Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 25.000

Housing:
die-cast aluminium



Light distributions

The FLAMINGO luminaire features a wide asymmetric 140x70 light distribution, designed to deliver uniform and efficient illumination across open areas. Its optical system ensures optimal coverage while minimizing glare.

Optimized beam angle – ensures wide, asymmetric light distribution ideal for large-area illumination.

Efficient coverage – precise lighting of both central and peripheral zones with reduced light spill.



No light pollution – the luminaire has a ULOR factor of 0%, which translates into no glare or light loss.

Application – urban and residential streets, pedestrian zones, parking areas, housing estates and community areas, private zones.



Luminous flux [lm]
3000, 5000, 10000

Beam angle:
14 0x70 °

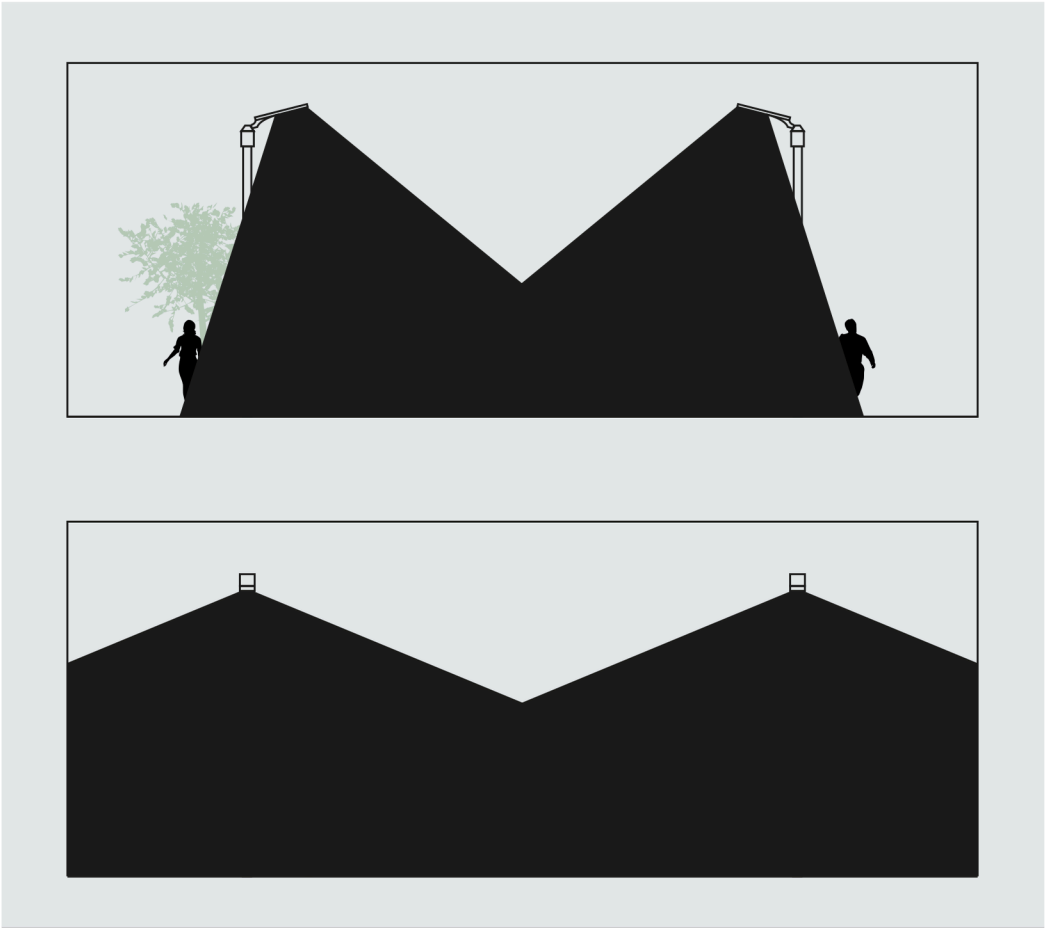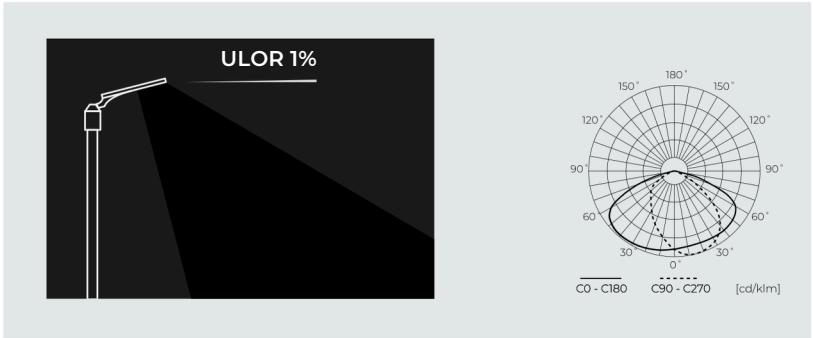

Automatic lighting thanks to twilight sensor


The FLAMINGO road luminaire is available in models equipped with a modern twilight sensor, which automatically adjusts the operation of the luminaire based on ambient lighting conditions. This ensures optimal illumination of the space while significantly saving energy.

The twilight sensor activates the luminaire when the light level drops below **50lx** and turns it off when it reaches **500lx**. This means that the luminaire operates not only at night but also in conditions of heavy cloud cover, providing efficient and economical lighting at all times.




Flexibility of installation

With the option of mounting on a pole, boom or directly on a wall, the luminaire provides flexibility and ease of installation. What's more, it gives you the option to tilt the luminaire by **+/- 15 degrees** or mount it at a **90° angle**, allowing you to perfectly tailor the lighting to your specific needs.

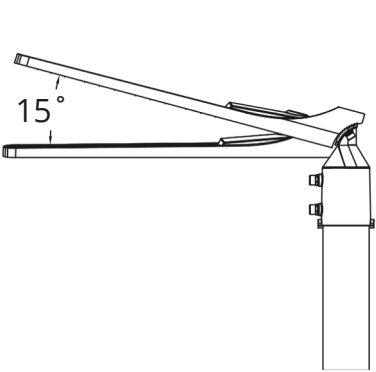


Mounting on pole

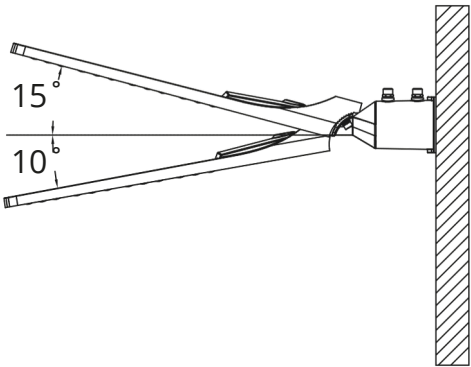

Mounting on wall

Road luminaire FLAMINGO black




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
203815	30	1 4 0x70	4000	3000	
203822	50	1 4 0x70	4000	5000	
203839	100	1 4 0x70	4000	10000	

Road luminaire FLAMINGO grey




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	TWILIGHT SENSOR	EEI
2 0378 5	30	1 4 0x70	4000	3000		
206960	30	1 4 0x70	4000	3000		
203792	50	1 4 0x70	4000	5000		
206977	50	1 4 0x70	4000	5000		
203808	100	1 4 0x70	4000	10000		
206984	100	1 4 0x70	4000	10000		


DIMENSIONS [mm]



FLAMINGO 30W
203815
2 0378 5
206960



FLAMINGO 50W
203822 203792
206977



FLAMINGO 100W
203839
203808
206984



ROAD LUMINAIRE
STREETLITE

3
WARRANTY

220-240V
AC

MAX

-40÷50°C

ULOR
0%

PF
0,9

IP
65

IK
08

[View product page](#)

EFFICACY 120 lm/W

Power [W]:
50-150

Luminous flux [lm]:
5000-15000

Beam angle [°]:
130x75

Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 36.000

Housing:
aluminium



Light distributions

The luminaire features a wide asymmetric 130×75° light distribution, optimized for effective road and pathway illumination. Its optical system ensures broad, directional coverage with minimal glare, providing uniform lighting along the roadway while reducing light spill to surrounding areas.



Luminous flux [lm]
5000, 10000, 15000

Beam angle:
130x75°

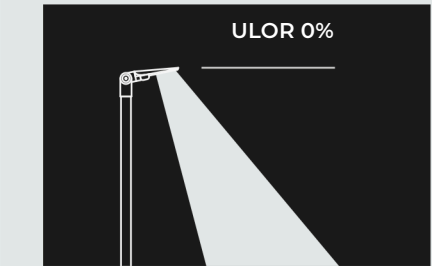


Road luminaire STREETLITE black

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
203716	50	130x75	4000	5000	
203723	100	130x75	4000	10000	

Road luminaire STREETLITE grey

201064	50	130x75	4000	5000	
201071	100	130x75	4000	10000	
201088	150	130x75	4000	15000	

DIMENSIONS [mm]

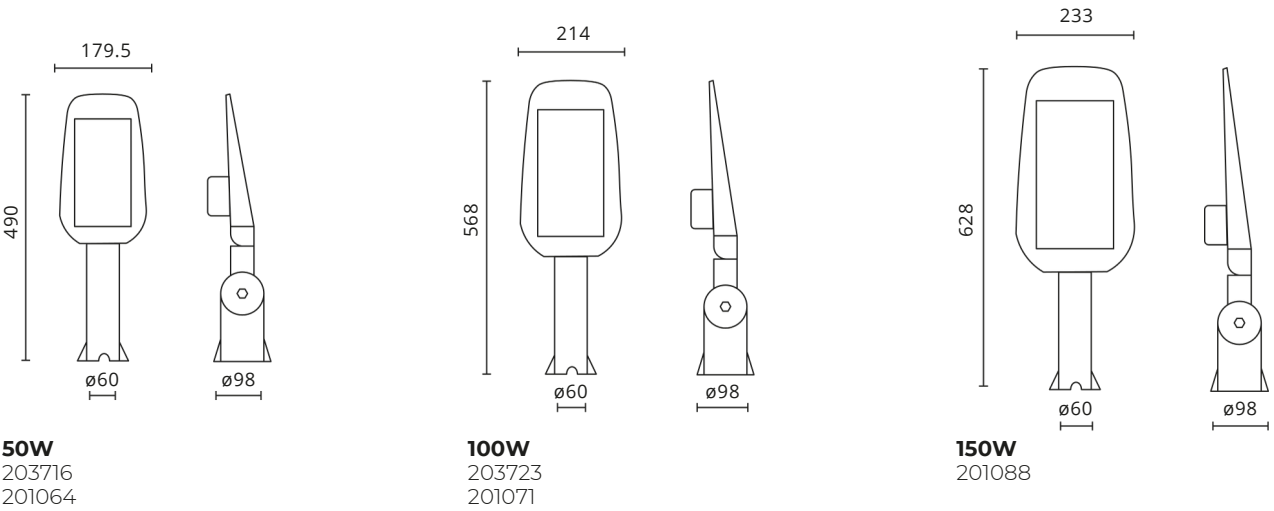

available
in two colours: _____

-  black
-  grey



easy and safe
tool-free connection _____



wind-resistant _____

galvanised pipe _____

PARK & ROAD LUMINAIRES
SPLIT POLE

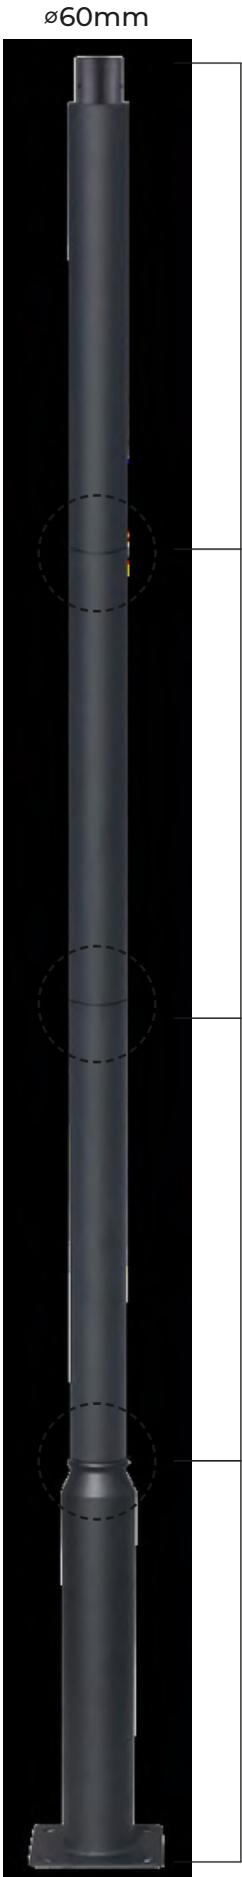

C

top pole

B

middle pole

B

middle pole

A

bottom pole

SPLIT POLE - FROM 2 TO 5 METERS

A practical, split lighting pole with an adjustable height from 2 to 5 meters is a modern alternative to traditional structures. Its modular design facilitates transport and installation, and its diameter is fully compatible with the majority of lighting fixtures available on the market.



5m

C

+

B

+

B


+

B

+

A

DIMENSIONS


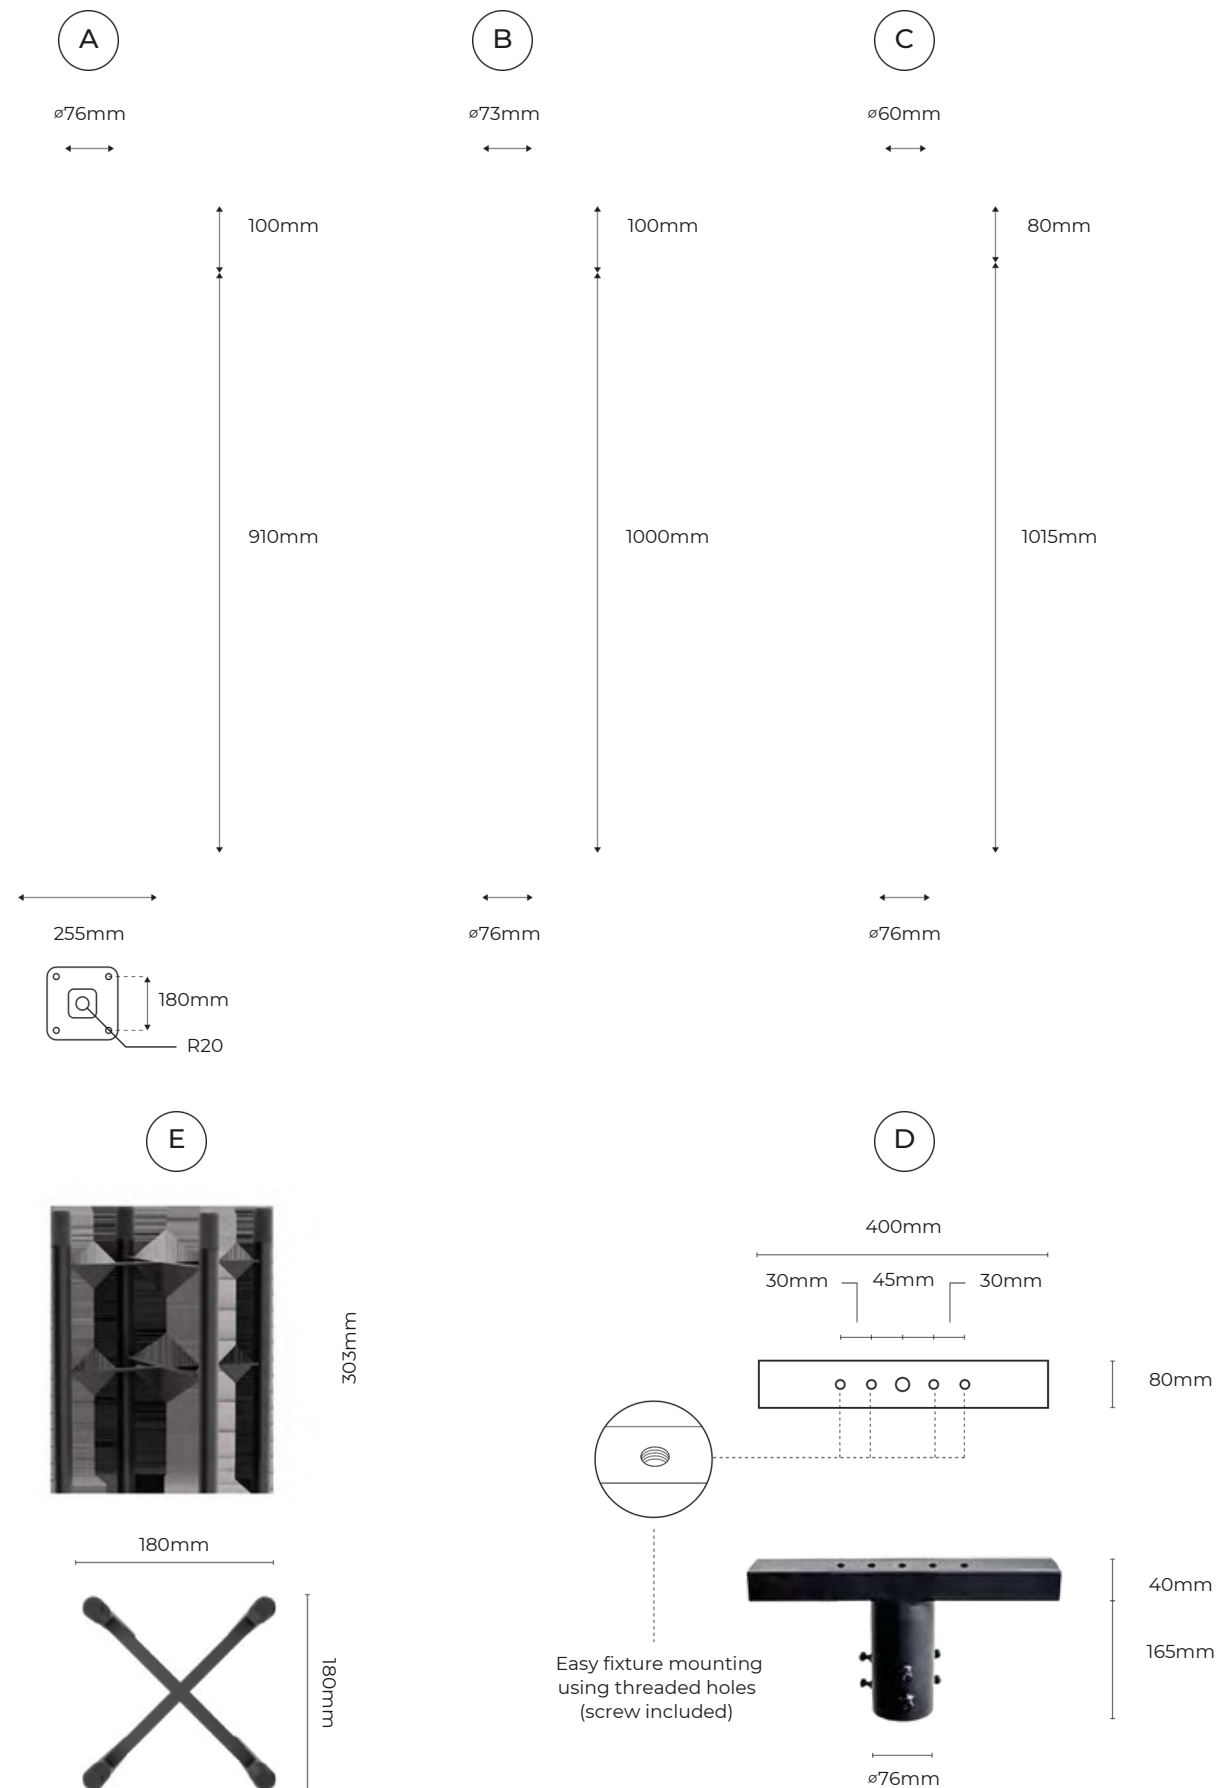


INSTALLATION EXAMPLE

The pole can be mounted using the foundation anchor, placed in the ground and set in concrete, or on a standard concrete base with a 180 × 180 mm bolt pattern. The 60 mm top diameter fits most popular lighting fixtures, enhancing its versatility. Additionally, a dedicated LED line bracket is available for floodlight installation, providing more mounting options.


Thanks to these features, the pole is ideal for various projects – industrial, recreational, and private – offering easy installation, flexible transport, and high durability.

COMPONENTS

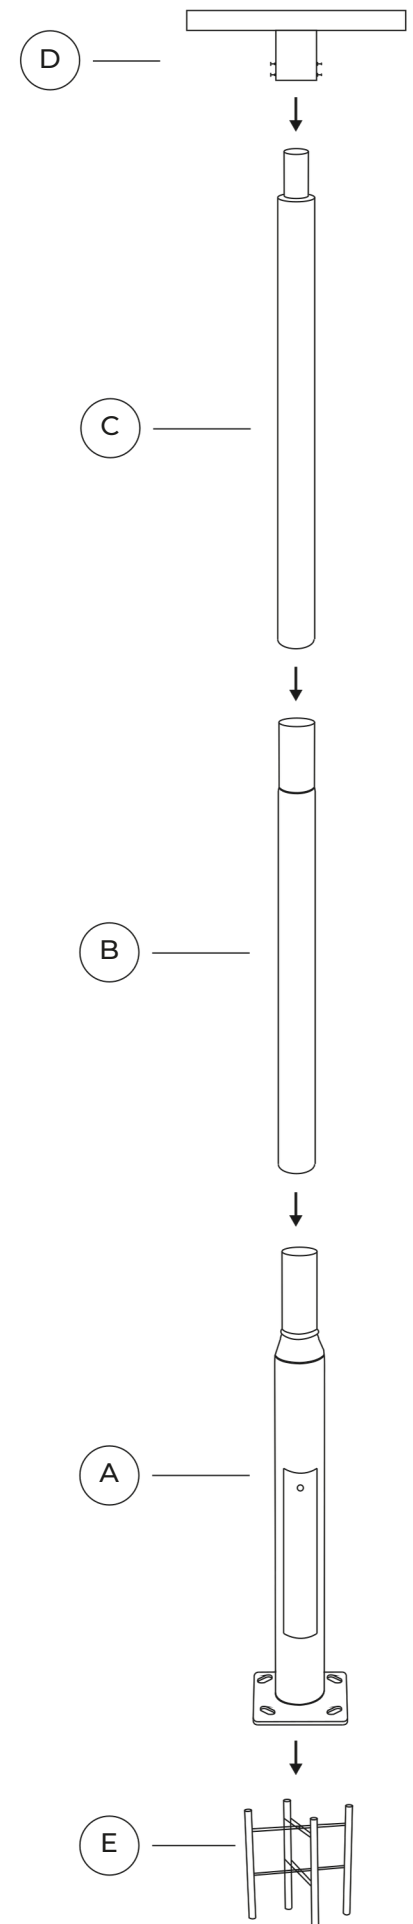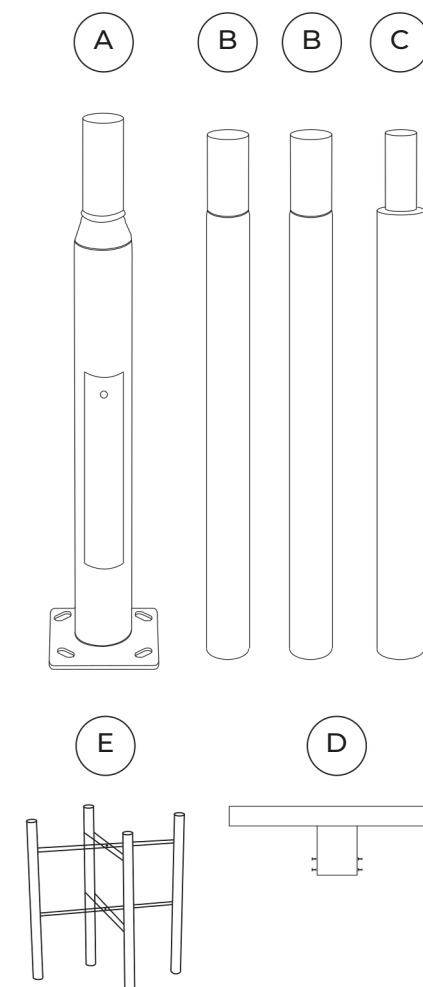


Split pole black

SYMBOL	NAME	TOTAL HEIGHT	INSTALLATION TYPE	HOUSING MATERIAL	THICKNESS OF MATERIAL
209800	Split pole	3m	split type	galvanised steel Q235	1,5mm
206618	Split pole	4m	split type	galvanised steel Q235	1,5mm
206625	Extension	1m	split type	galvanised steel Q235	1,5mm
206632	Floodlight bracket	1m	split type	galvanised steel Q235	1,5mm
206649	Burried steel frame	0,3m	foundation	galvanised steel Q235	




Split pole grey

SYMBOL	NAME	TOTAL HEIGHT	INSTALLATION TYPE	HOUSING MATERIAL	THICKNESS OF MATERIAL
209916	Split pole	3m	split type	galvanised steel Q235	1,5mm
209886	Split pole	4m	split type	galvanised steel Q235	1,5mm
209893	Extension	1m	split type	galvanised steel Q235	1,5mm
209909	Floodlight bracket	1m	split type	galvanised steel Q235	1,5mm
206649	Burried steel frame	0,3m	foundation	galvanised steel Q235	



EASIER AND CHEAPER TO TRANSPORT

The compact packaging allows the pole to fit both on a pallet and in a passenger car. In a station wagon, up to 7 boxes with poles can be transported, significantly reducing transport costs and increasing convenience.

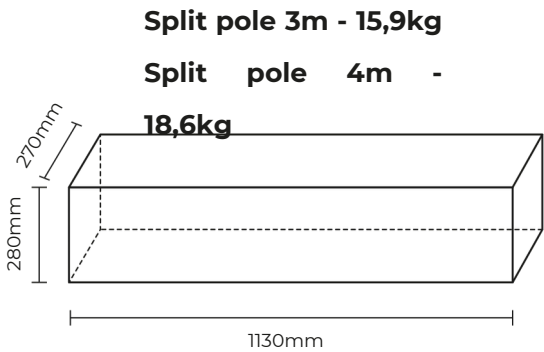

energy-efficient solution

PIR sensor

mounting on pole Ø60

independent of traditional energy sources

wall mounting possible

SOLAR ROAD LUMINAIRE

SUNSTREET

5 WARRANTY

MAX MAX
-40+50°C

5+45°C

IP 54



Lifetime [h]:
L70B50 - 35.000

Housing:
ABS





Remote control functions

Continuous mode

Sensor mode

Countdown modes (3h / 4h+Sensor / 6h)


Auto mode




Solar road luminaire SUNSTREET

SYMBOL	PHOTOVOLTAIC POWER [W]	BATTERY [mAh]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
211315	8	3560	140x80	6500	750
211322	12	8000	140x80	6500	1300

DIMENSIONS [mm]

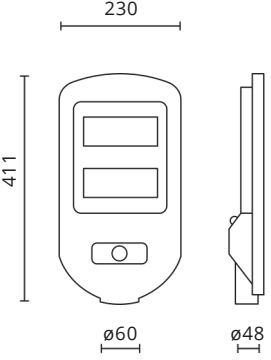

211315

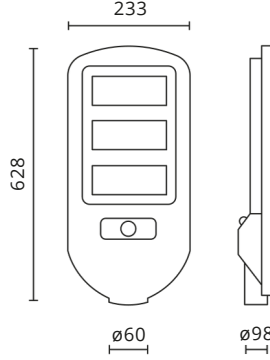

211322

SOLAR ROAD LUMINAIRES / SUNSTREET

110

LED line

03

LED PANELS

DIORA
114

PANEL 2IN1
118

BACKLIT
122

ACCESSORIES
128

CEILING LAMPS

LUNAR
132

ACTO N
136

PLAFON IP44
140

DOWNLIGHTS

CALMOS
142

EASY FLEX
144

EASY FIX PRO
150


EASY FIX
154

MOLLY
160



FRAMELESS
164





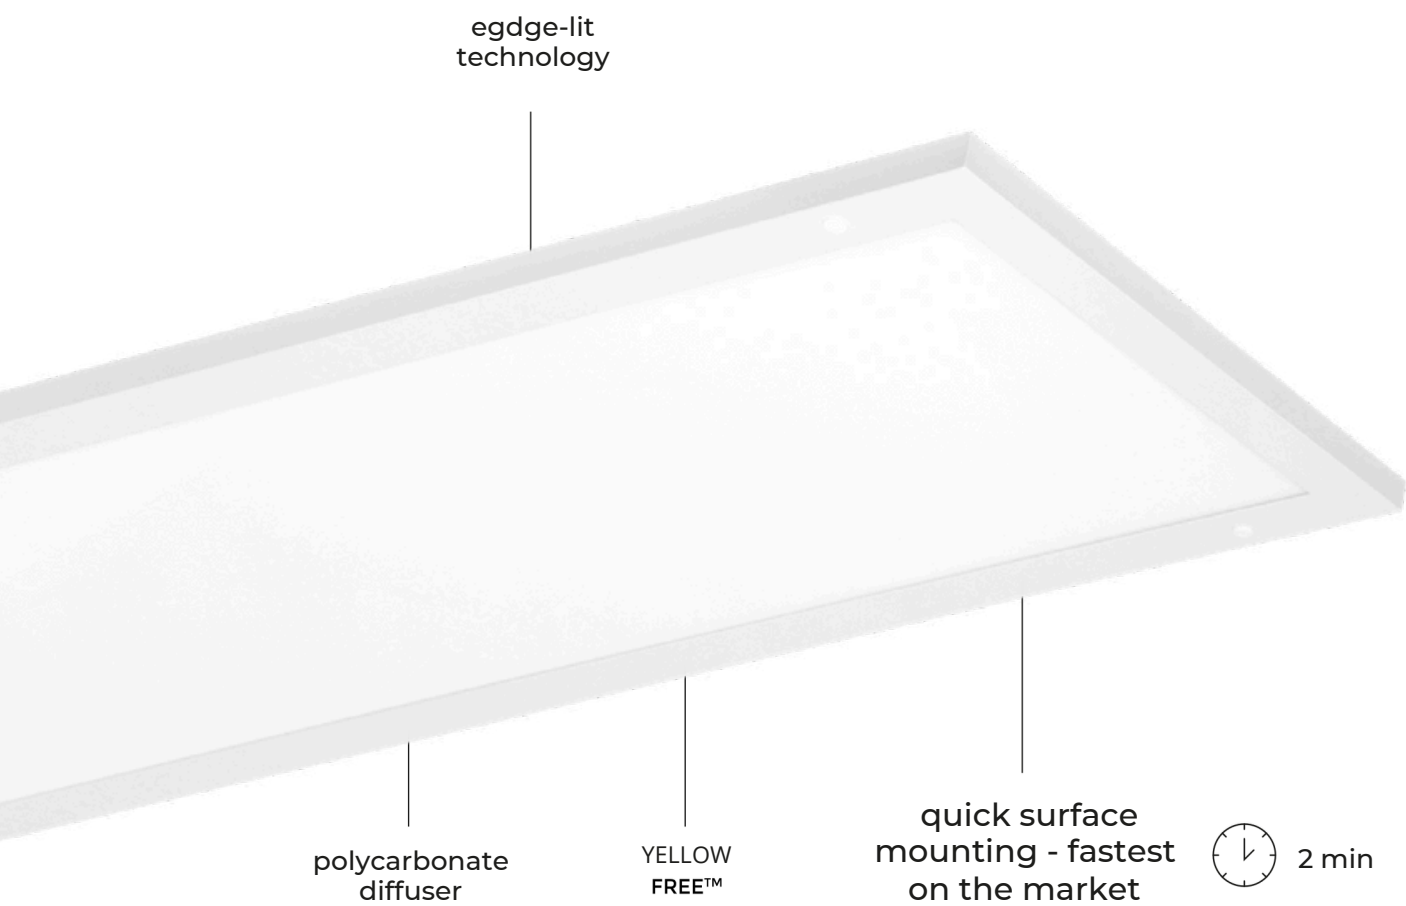



LED PANEL
PANEL 2in1

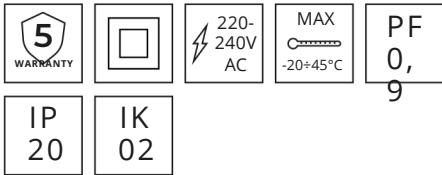

EFFICACY 120 lm/W
Power [W]:
30
Luminous flux [lm]:
3600
Beam angle [°]:
120
Colour temperature [K]:
4000




Lifetime [h]:
L70B50 - 50.000
Housing:
aluminium

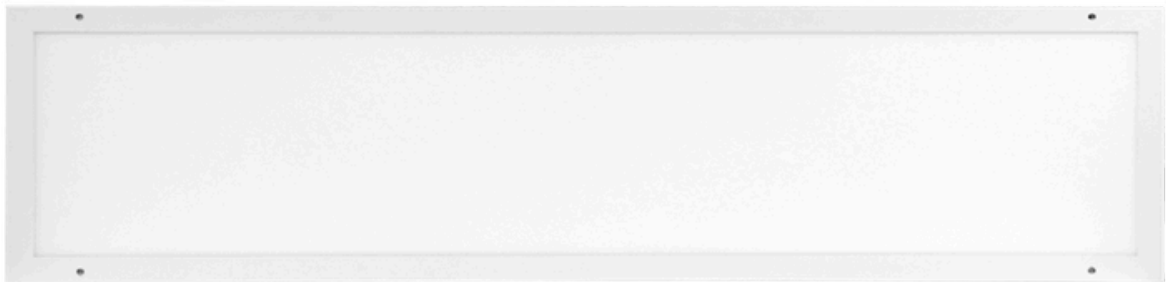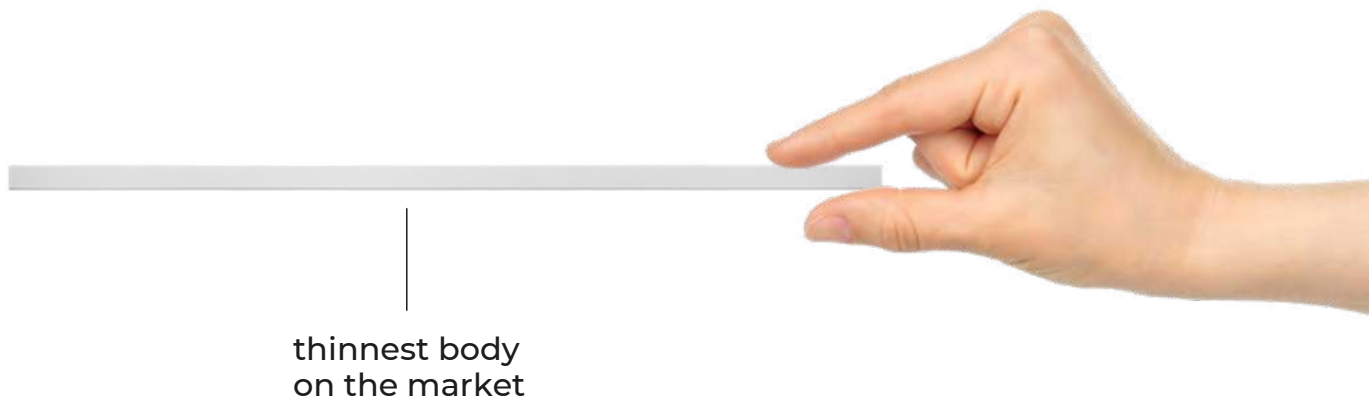




surface mounting


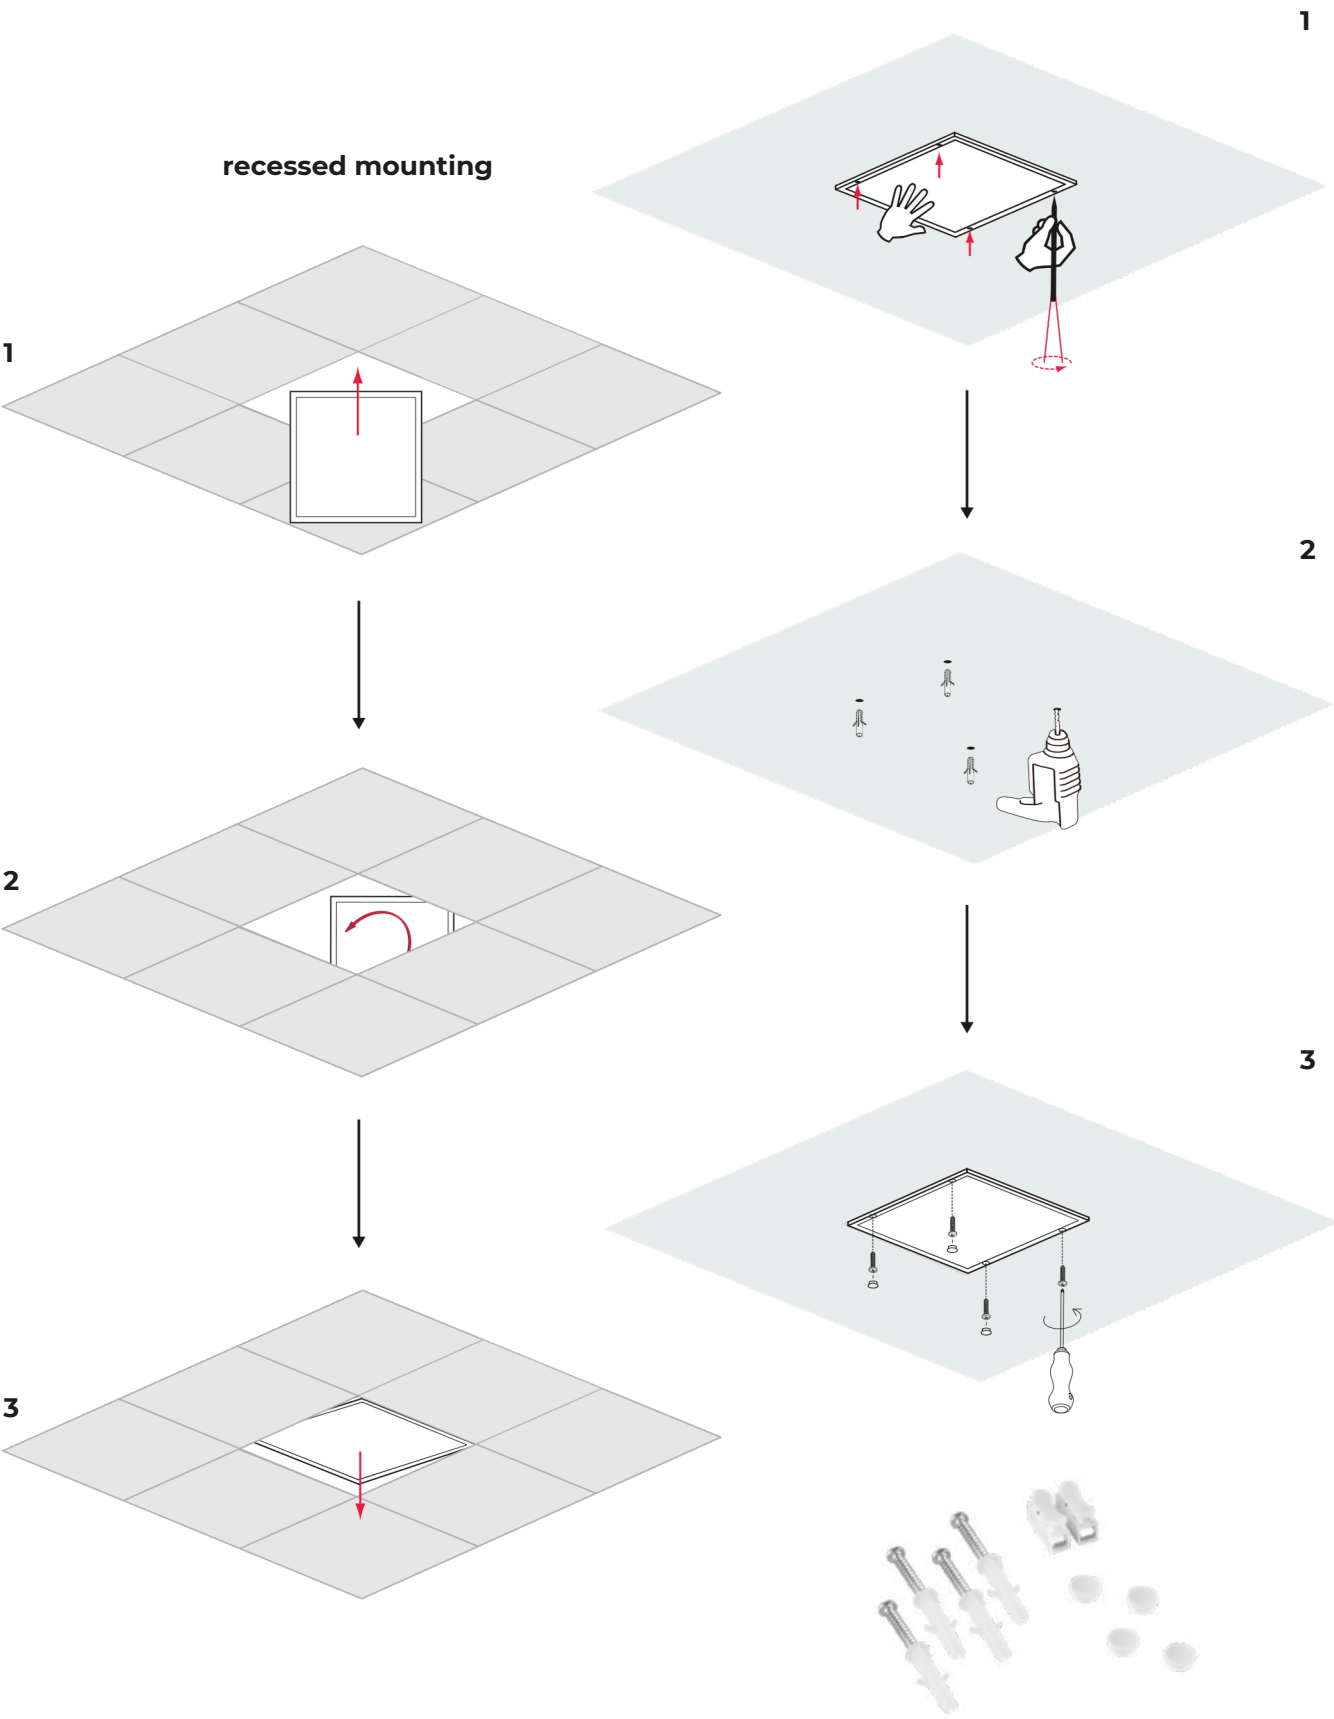



Panel 2in1



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
475459	30	120	4000	3600	
478481	30	120	4000	3600	

DIMENSIONS [mm]

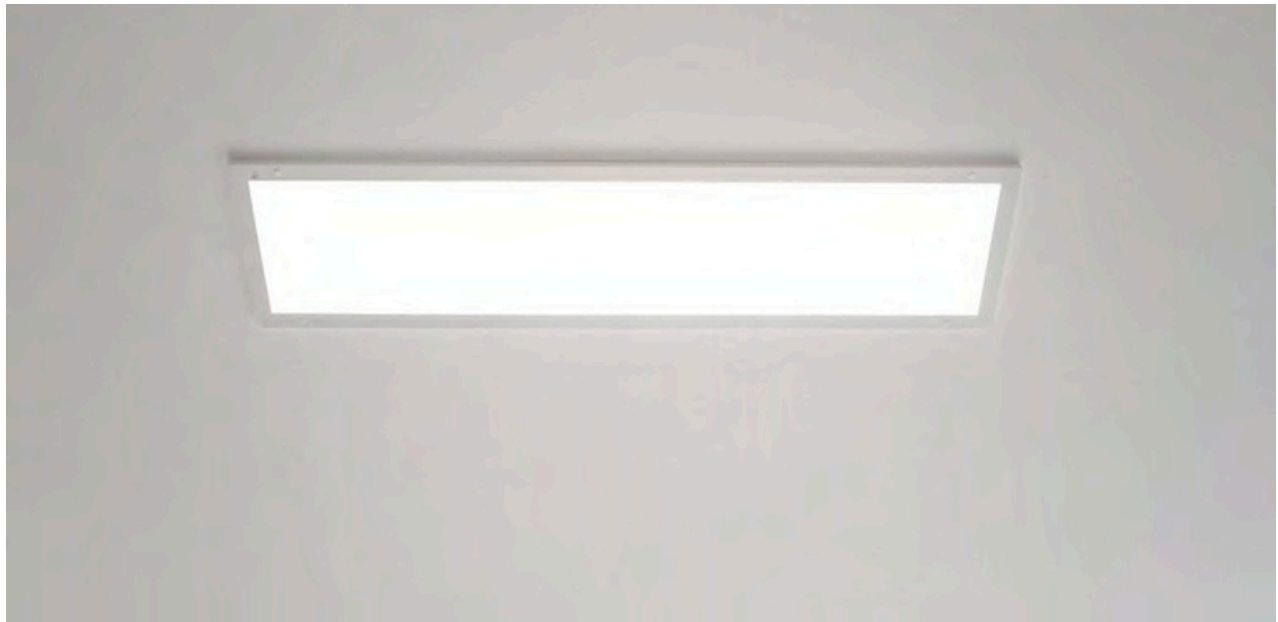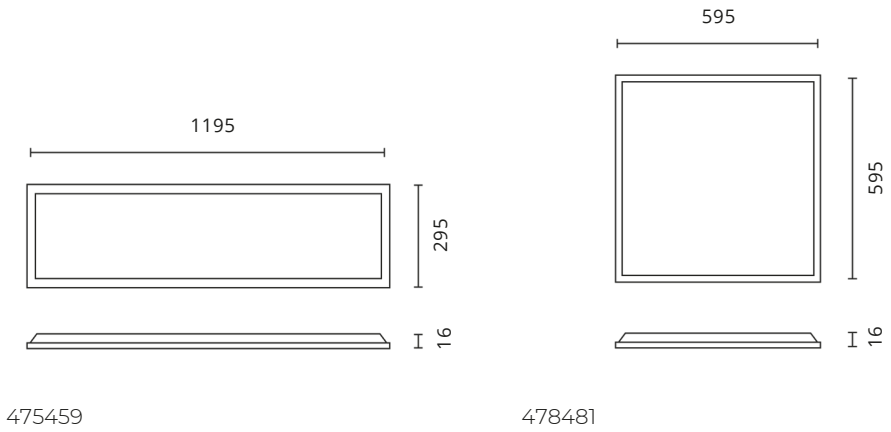

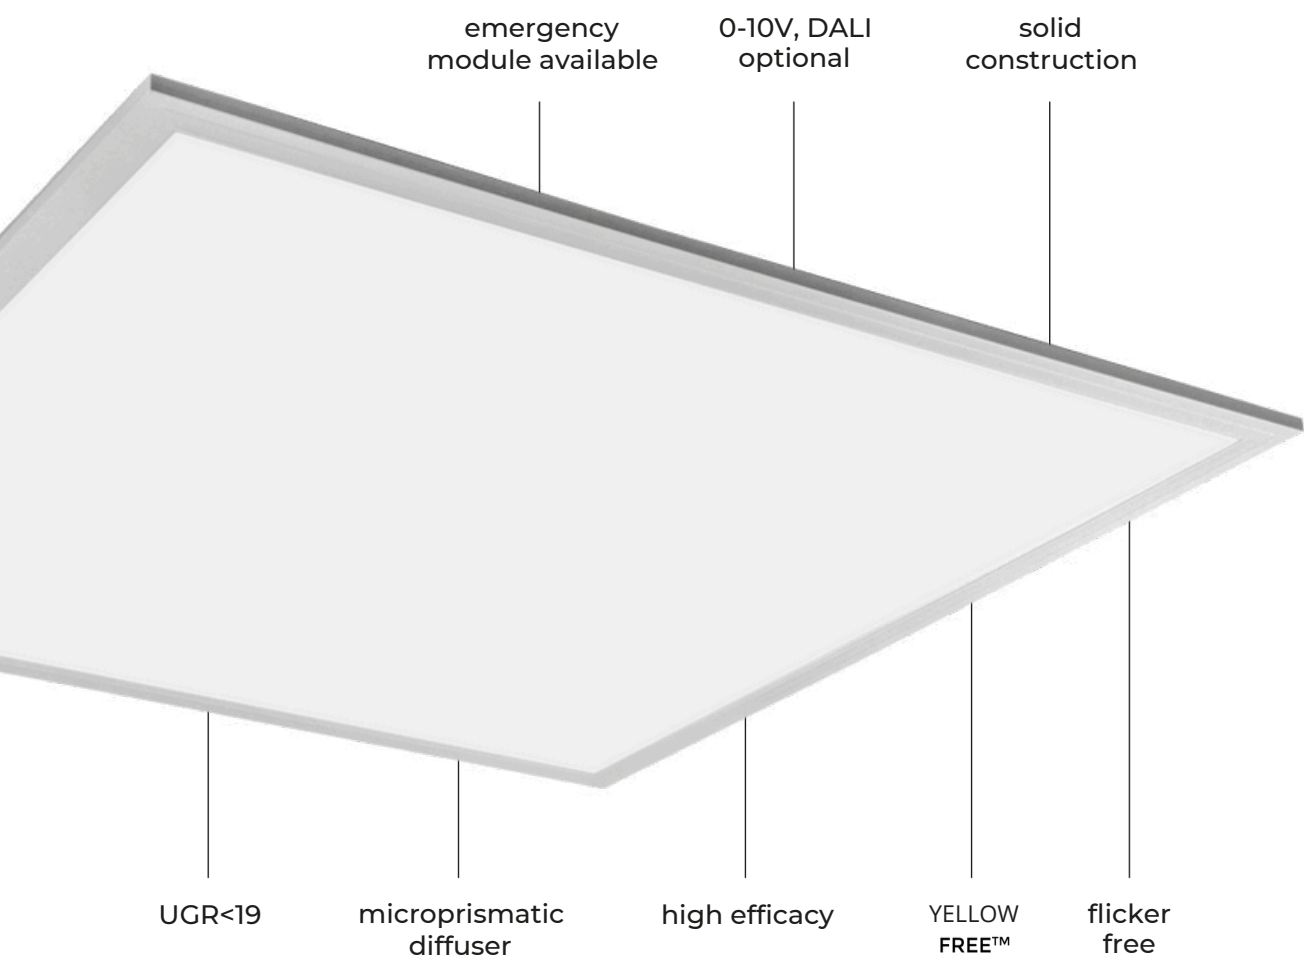

LED PANEL
BACKLIT

5
WARRANTY

2
WARRANTY

MAX
-25÷45°C

PF
0,9

IP
20

EFFICACY 120-160 lm/W

Power [W]:
25-42

Luminous flux [lm]:
4000-6300

Beam angle [°]:
90-120

Colour temperature [K]:

3000

4000

5000

Lifetime [h]:
L70B50 - 30.000-75.000

Housing:
aluminium


Panel Backlit PRIME

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEI
	205970	25	120	4000		
	205987	25	120	4000		
	201255	28	120	4000		
	205819	34	120	4000		
	205826	34	120	4000		
	200180	40	120	4000		
	201330	40	120	4000		


Panel Backlit PRIME UGR<19

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEI
	205833	34	90	4000		
	205864	34	90	4000		
	203457	42	90	4000		
	206519	34	120	4000		
	206526	34	120	4000		
				476		
				0		

DIMENSIONS [mm]

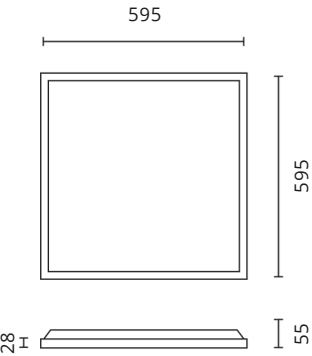

SQUARE
205970 200180
205987 205833
201255 205864
205819 203457
205826

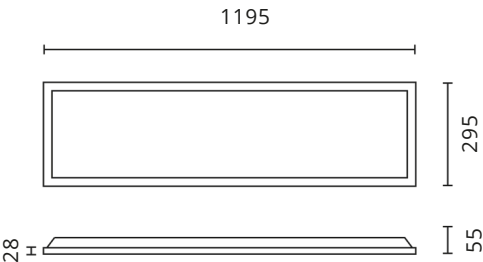

RECTANGULAR
201330 206519
206526


Panel Backlit PRIME with emergency module 3h and autotest

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
201255-AW3HAT	28	120	4000	4000	
200180-AW3HAT	40	120	4000	4800	


Panel Backlit 620x620 PRIME UGR<19

204522	34	90	4000	4760	
204539	34	90	3000-4000-5000 (CCT)	4760	

DIMENSIONS [mm]

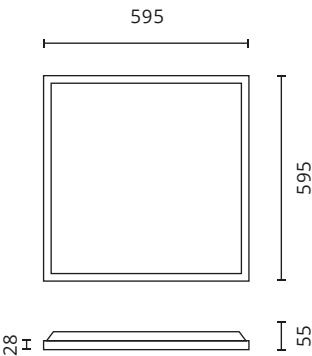

SQUARE
201255-AW3HAT
200180-AW3HAT

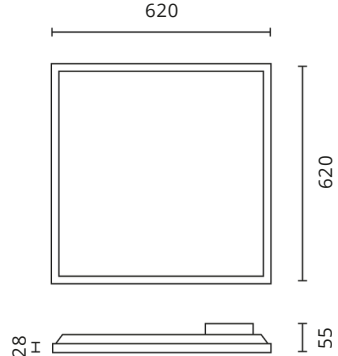

SQUARE 620x620
206519
206526

Panel Backlit LITE



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
202887	40	120	4000	4000	A t G F

Panel Backlit 2in1 595x595 LITE




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
203921	40	120	4000	4000	A t G E




203938	New	40	120	4000	4000	A t G E
--------	-----	----	-----	------	------	---

DIMENSIONS [mm]

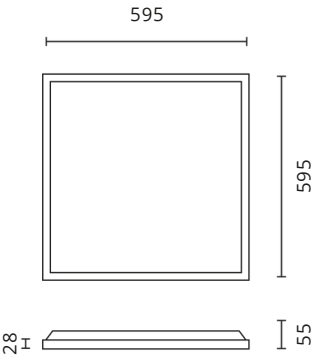

BACKLIT LITE
202887

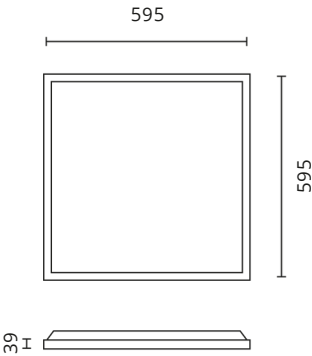

BACKLIT 2IN1 595x595 LITE
203921
203938

Panel Backlit 2in1 620x620 LITE



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
205598	40	120	4000	4000	A t G E



205604	New	40	120	4000	4000	A t G E
--------	-----	----	-----	------	------	---

Panel Backlit 2in1 295x1195 LITE




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
203945	40	120	4000	4000	A t G E




203952	New	40	120	4000	4000	A t G E
--------	-----	----	-----	------	------	---

DIMENSIONS [mm]

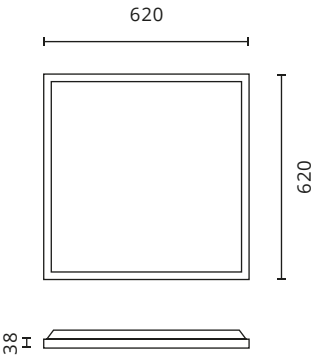

BACKLIT 2IN1 620x620 LITE
203921
203938

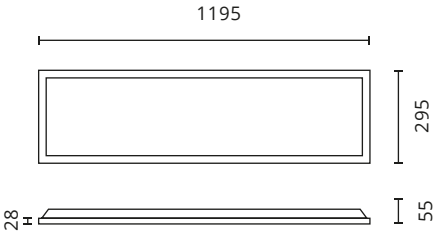


BACKLIT 2IN1 295x1195
203945
203952




LED PANEL
ACCESSORIES




[View product page](#)




Surface mounting frames

SYMBOL	NAME	DIMENSIONS [mm]	COMPATIBLE PRODUCTS
	209787 New Surface mounting frame SKYFRAME	600x600 H70	BACKLIT, SLIM, DIORA
	209763 New Surface mounting frame PRIME	600x600 H70	BACKLIT, SLIM, DIORA
	209770 New Surface mounting frame PRIME	1200x300 H70	BACKLIT, SLIM
	209756 New Surface mounting frame LITE	600x600 H62	BACKLIT, SLIM, DIORA


DIMENSIONS [mm]




209787



209763





209756

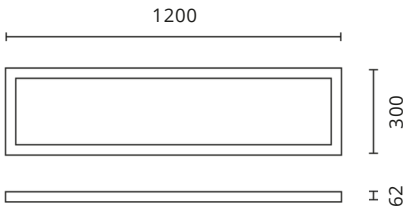

209770

Installation accessories

SYMBOL	NAME	COMPATIBLE PRODUCTS
	201347 Spring holders	BACKLIT
	245725 Springs	PANEL SLIM, PANEL 2in1, Frame Panel, DIORA,
	245718 Panel hooks	
	245701 Suspension wires	

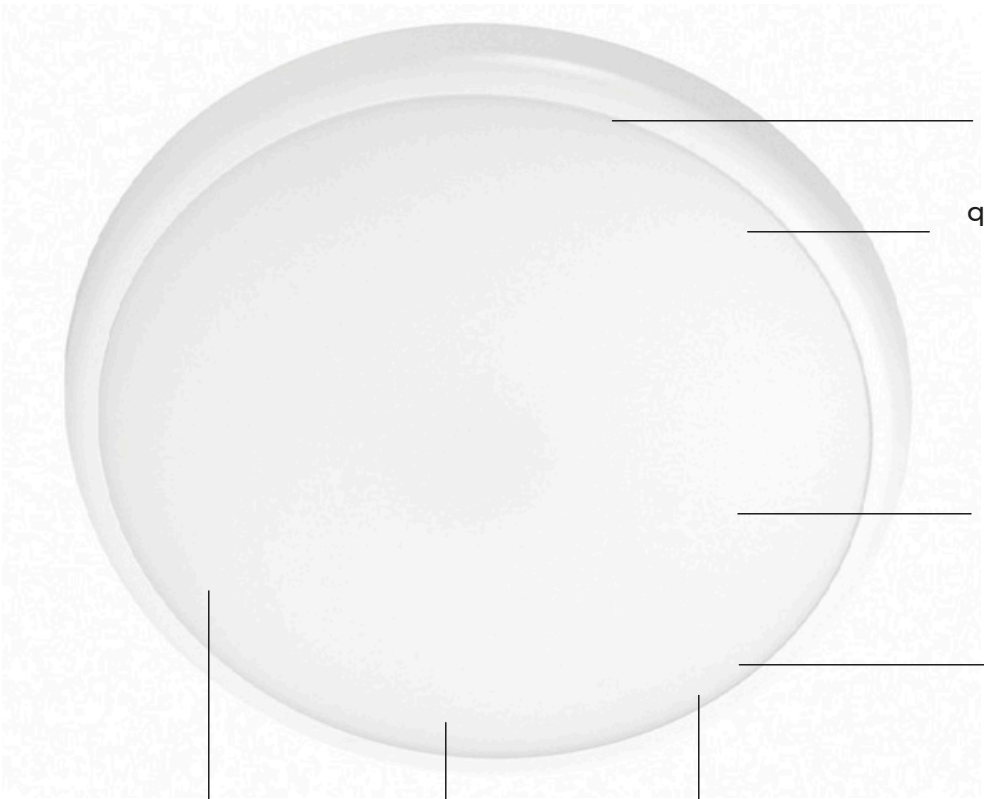

indoor and outdoor
use

quick and easy installation
push & click

adjusting sensor
options





STAND-BY

polycarbonate
housing

YELLOW
FREE™

high resistance to
mechanical damage

CEILING LAMP LUNAR

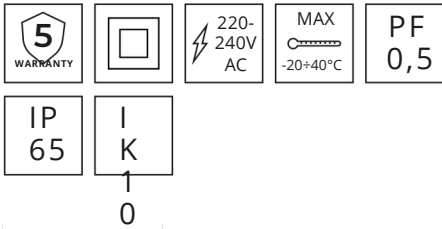

EFFICACY 85-100 lm/W
Power [W]:
16-22
Luminous flux [lm]:
1600-2200
Beam angle [°]:
120
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 50.000
Housing:
polycarbonate

Light distributions



The plafon features a wide 120° beam angle, ensuring uniform and diffused light distribution across the entire space. Ideal for general lighting with minimal shadowing.


Wide and even light distribution – illuminates a large area without harsh shadows or spotlight focus.

Optimization of luminaire placement – the wide angle reduces the risk of dark zones, which makes it possible to reduce the number of luminaires in the room while maintaining adequate light levels.

Application of LUNAR – staircases and walkways, building entrances and exterior canopies, public and industrial facilities, common parts in residential and commercial developments.




Luminous flux [lm]
1600-2200
Beam angle:
120°

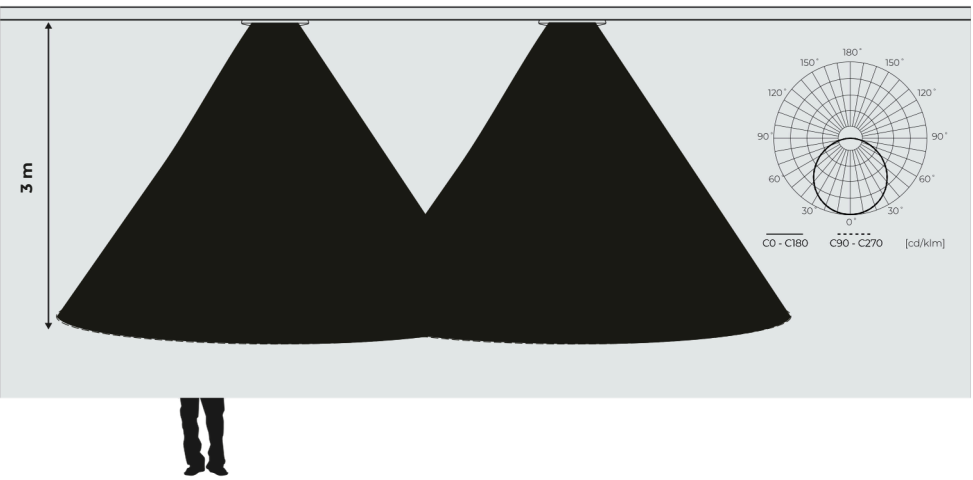

Microwave motion sensor

The motion detector is designed to flexibly adapt the detection zone to different usage conditions. With an adjustable detection range of 4m to 16m, the device provides high functionality in both smaller and larger spaces.

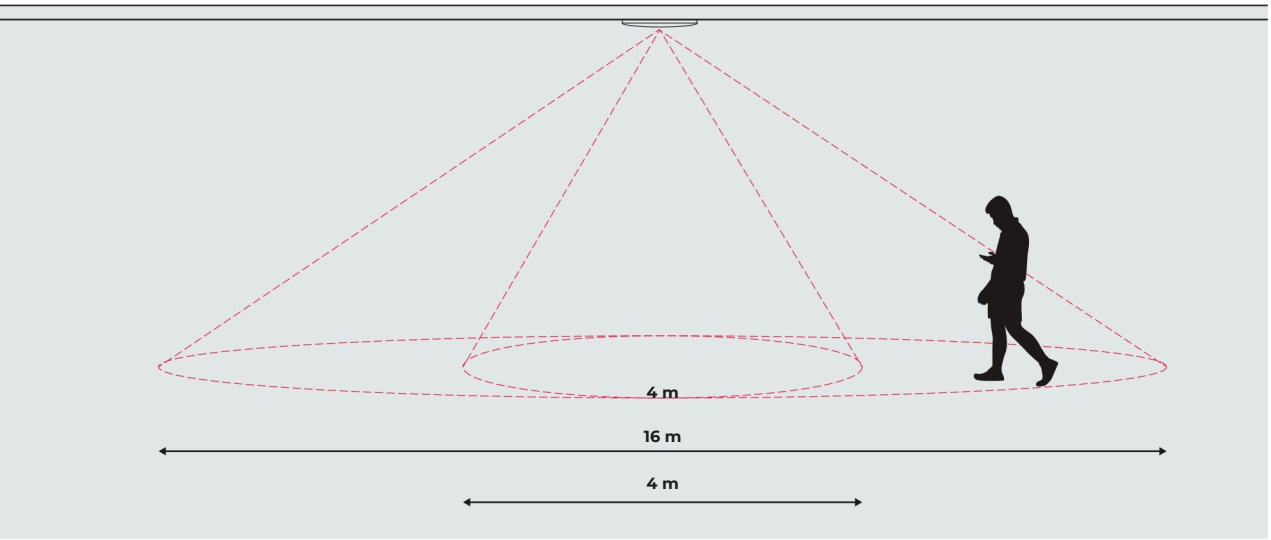


Easy Installation & Motion Sensor

The LUNAR ceiling lamp features an intuitive Push & Click mounting system for quick and effortless installation. With just two buttons, the mounting plate easily detaches for secure ceiling attachment, allowing the luminaire to snap into place – no extra tools required.

Equipped with a smart motion sensor, LUNAR dynamically adjusts brightness and operation time, ensuring energy-efficient lighting and full control over its performance. The Standby Dimming Mode provides soft illumination after motion detection ceases, enhancing safety and comfort in hallways, stairwells, and shared spaces.

Push and click – tool-free detachment of the mounting plate with two buttons.

Junction box – enables quick and secure wiring for a clean installation.

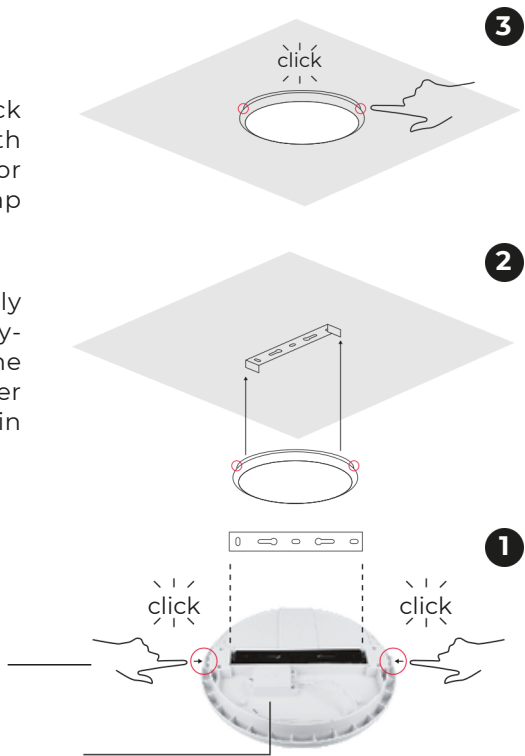

The LUNAR ceiling lamp features a motion and light sensor that adjusts lighting automatically. With adjustable LUX, SENS, TIME, and STBY settings, users can control activation, detection range, and illumination duration.

LUX – It is used to adjust day or night operation. When the knob is set in the sun (max) position the LUNAR can work both day and night. When the knob is set to position 3 (minimum) plafon will work at night with ambient light less than 3 lux.

SENS – sensor detection sensitivity adjustment from 4m (-) to 16m (+).

TIME – adjustable lighting time from the moment motion is detected. Operates from min. 10 sec. to max. 12 min.


STBY – the standby time of the light after the disappearance of motion. The light will be dimmed to 20% value and will remain at this level for the set time on the knob STBY. Adjustable from 0 sec. to infinity. In addition, the plafon is equipped with **SoftDIM function**, which guarantees smooth and comfortable dimming.

Ceiling lamp LUNAR

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEL
470577-II	16	120	4000	1600		A1G D
470584-II	16	120	4000	1600		
470591-II	22	120	4000	2200		A1G D
470607-II	22	120	4000	2200		



DIMENSIONS [mm]

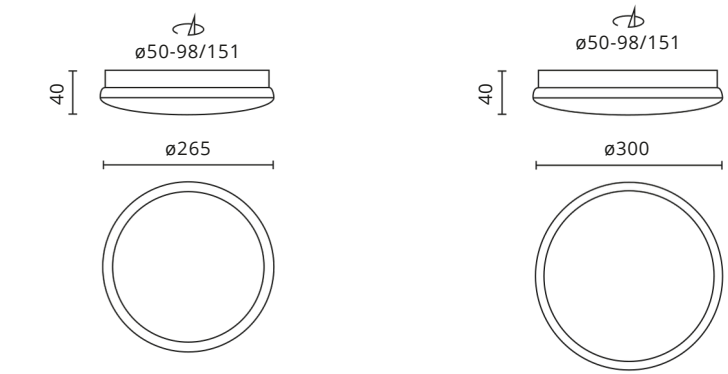



16W
470577-II
470584-II

22W
470591-II
470607-II






CEILING LAMP ACTON

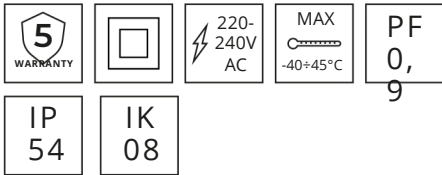

EFFICACY 105 lm/W
Power [W]:
18 -24
Luminous flux [lm]:
1900-2600
Beam angle [°]:
120
Colour temperature [K]:



Lifetime [h]:
L70B50 - 50.000
Housing:
polycarbonate

Light distributions



The plafon features a wide 120° beam angle, ensuring uniform and diffused light distribution across the entire space. Ideal for general lighting with minimal shadowing.


Wide and even light distribution – illuminates a large area without harsh shadows or spotlight focus.

Optimization of luminaire placement – the wide angle reduces the risk of dark zones, which makes it possible to reduce the number of luminaires in the room while maintaining adequate light levels.

Application of ACTON – staircases and walkways, building entrances and exterior canopies, public and industrial facilities, common parts in residential and commercial developments.




Luminous flux [lm]
1900-2600
Beam angle:
120°

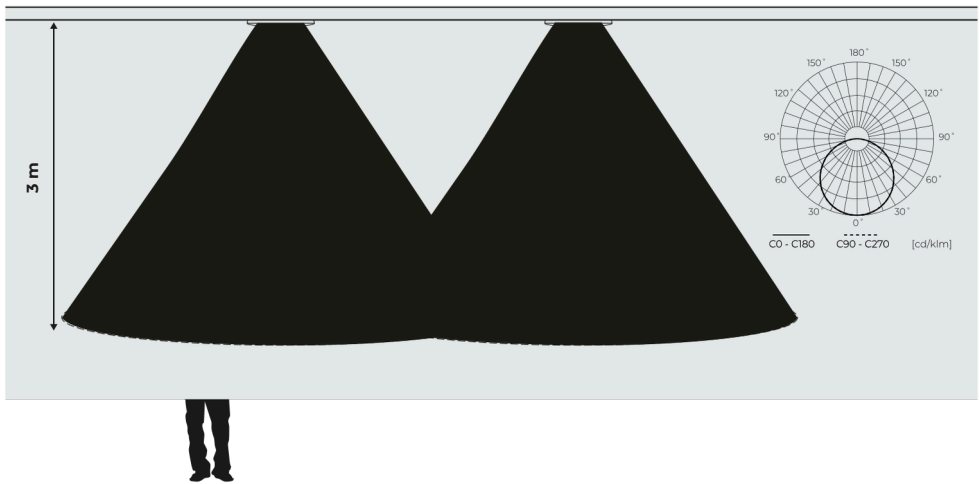

Microwave motion sensor

The motion detector is designed to flexibly adapt the detection zone to different usage conditions. With an adjustable detection range of 4m to 16m, the device provides high functionality in both smaller and larger spaces. The illumination time after the movement stops is 90 seconds.

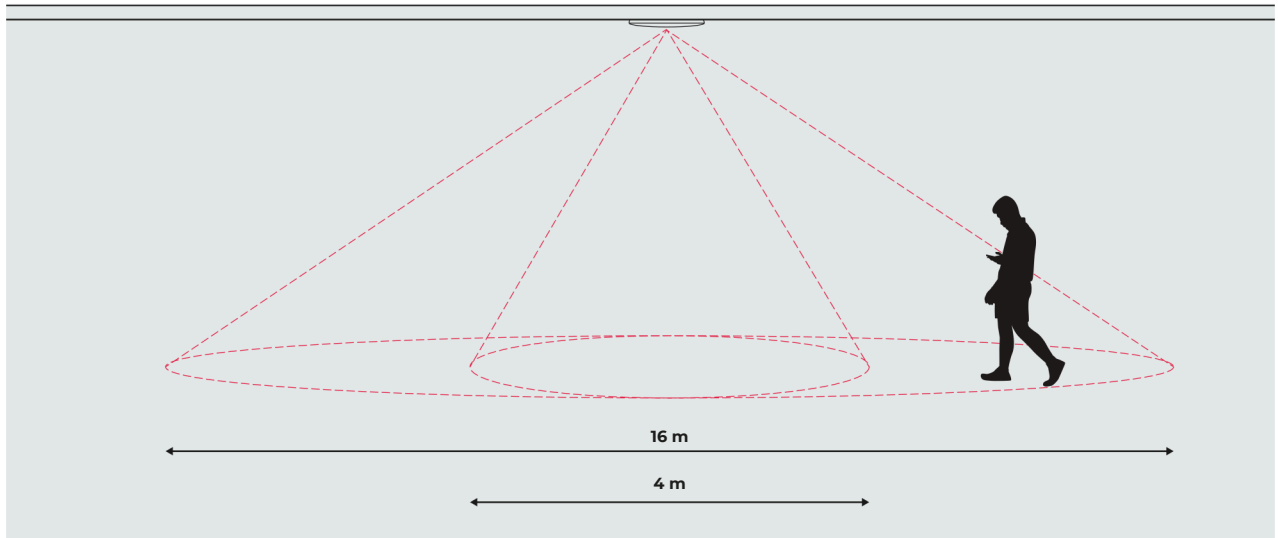

Easy and safe installation

ACTON plafons are designed for quick and hassle-free installation to walls and ceilings. Thanks to the separation of the luminous part from the base and the use of a steel cable supporting the luminaire, installation is convenient and safe. This solution simplifies wiring and installation, minimizing mounting time.



Ceiling lamp ACTON round




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEI
201095	18	120	3000	1900		A C F
201101	18	120	3000	1900	●	
201118	18	120	4000	2600		
201125	18	120	4000	1900	●	
201132	24	120	4000	2000		
201149	24	120	4000	2600	●	

Ceiling lamp ACTON square




SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEI
201156	18	120	3000	1900		A C F
201163	18	120	3000	1900	●	
201170	18	120	4000	2000		
201187	18	120	4000	2000	●	


DIMENSIONS [mm]



18W
201095
201101
201118
201125



24W
201132
201149



18W
201156
201163
201170
201187




flicker
free

microwave sensor
360°, 8m

CRI>80

robust cost-effective
solution

circular shape with diameters of
Ø260mm, Ø350mm and Ø380mm

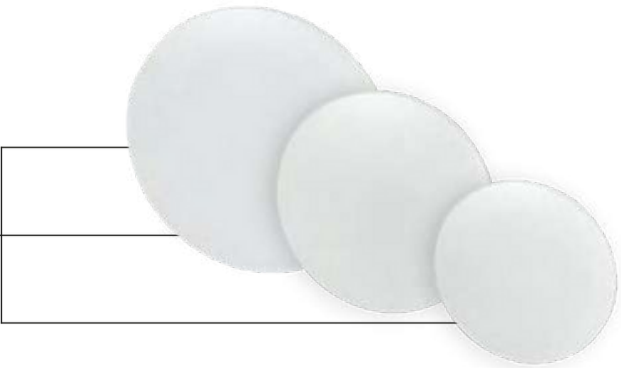

CEILING LAMP
PLAFON IP44



EFFICACY 75-86 lm/W

Power [W]:
12-24

Luminous flux [lm]:
900-1950

Beam angle [°]:
120

Colour temperature [K]:

3000 4000



Lifetime [h]:
L70B50 - 30.000

Housing:
polycarbonate



Ceiling lamp PLAFON IP44

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEI
201354	12	120	3000	900		A++ F
201361	12	120	3000	900	●	
201378	12	120	4000	960		
201385	12	120	4000	960	●	
201392	18	120	3000	1450		
201408	18	120	3000	1450	●	
201415	18	120	4000	1550		
201422	18	120	4000	1550	●	
201439	24	120	4000	1950		
201446	24	120	4000	1950	●	




Ceiling lamp BULKHEAD 70lm/W

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
245497	12	120	4000	840	A++ E



DIMENSIONS [mm]



12W

20135


4

201361

20137

8

201385




18W

201392

201408

201415


201422





24W

201439

201446

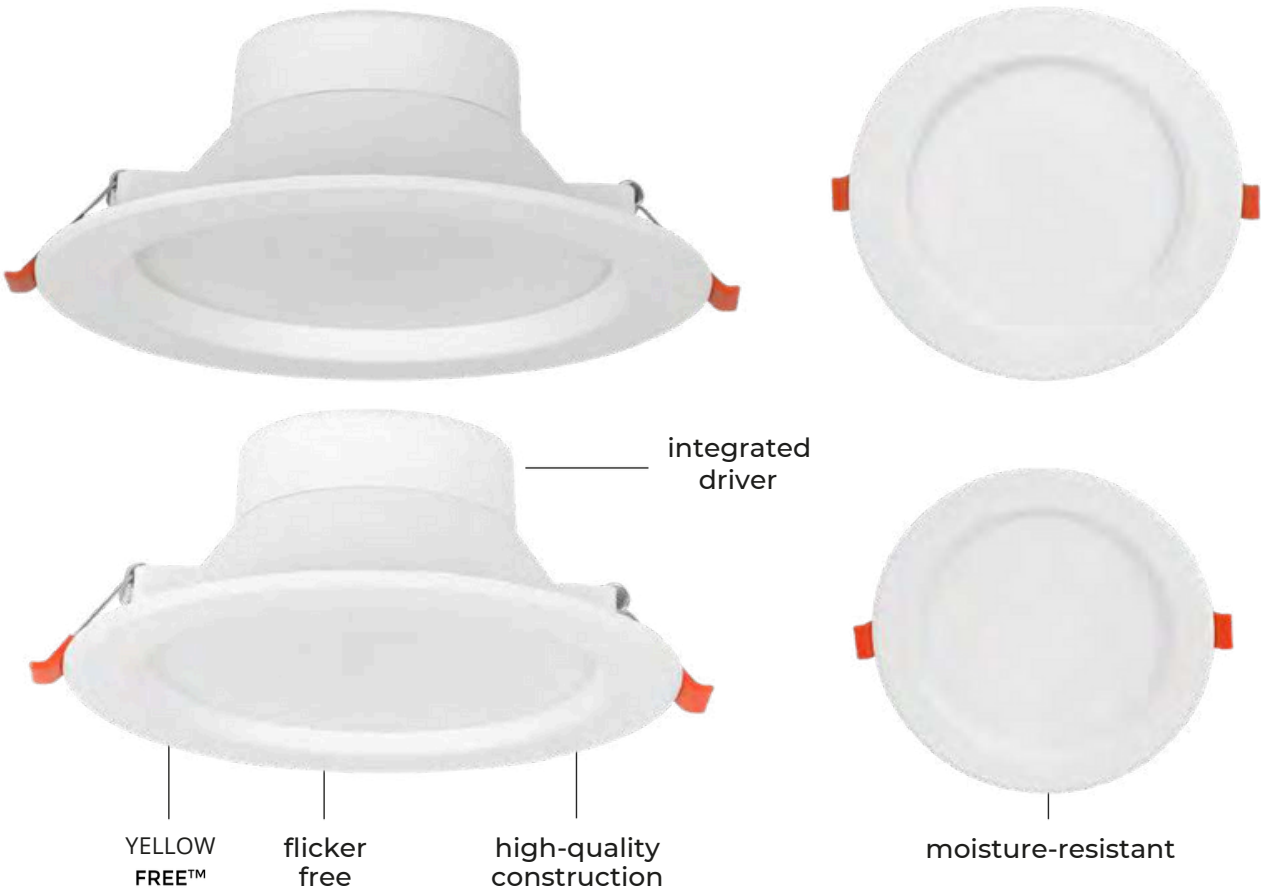

DOWNLIGHT
CALMOS

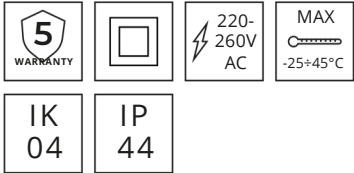

EFFICACY 116 lm/W
Power [W]:
18 -24
Luminous flux [lm]:
2100-2800
Beam angle [°]:
110
Colour temperature [K]:
4000



Lifetime [h]:
L70B50 - 50.000
Housing:
aluminium


Light distributions

Downlight features a wide beam angle of 110°, providing even illumination over a large surface area with limited shadowing. Ideal solution for all open spaces.

Application of CALMOS – modern living spaces, interiors with low ceilings, communication zones, shops and commercial spaces, reception areas, waiting rooms, entrance areas.



Luminous flux [lm]
2100-2800
Beam angle:
110°

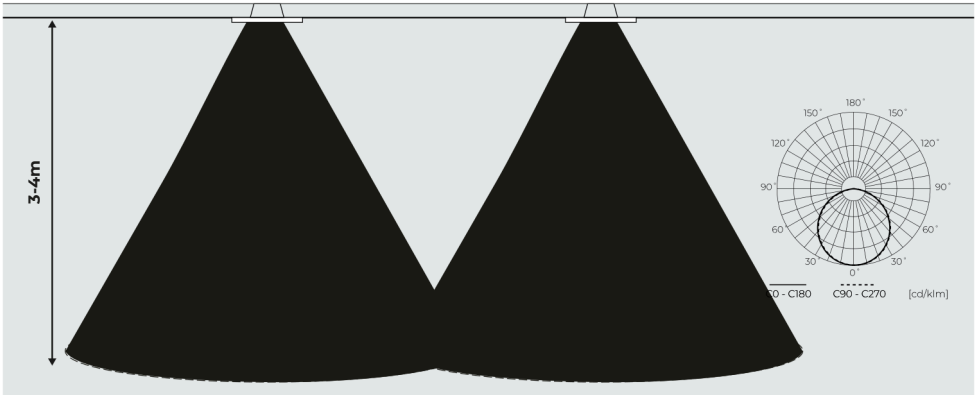


Downlight CALMOS


SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
202122	18	110	4000	2100	A E
202139	24	110	4000	2800	A E



DIMENSIONS [mm]



18W
202122





24W
202139



wide range of power 6-70W

DOWNLIGHT EASY FLEX

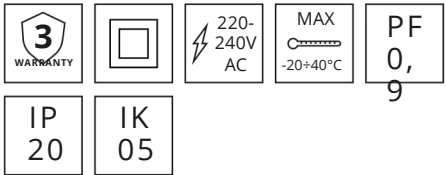

EFFICACY 75-90 lm/W

Power [W]:
6-70

Luminous flux [lm]:
450-6300

Beam angle [°]:
120

Colour temperature [K]:



Lifetime [h]:
L70B50 - 30.000

Housing:



Light distributions


Downlight features a wide 120° beam angle, providing uniform illumination with minimal shadowing. Ideal for open spaces and general lighting applications.

Application of EASY FLEX – modern interiors, apartments, commercial buildings, corridors and communication zones, quick modernization of lighting installation.




Luminous flux [lm]
450-6300

Beam angle:
120°

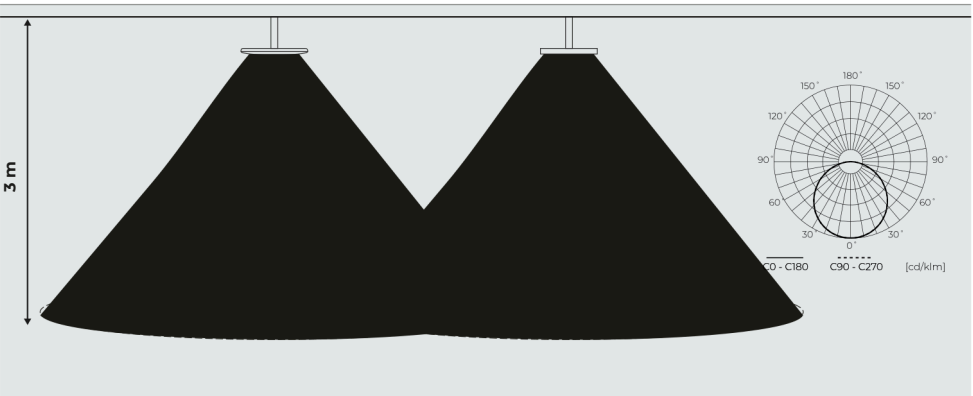



Adjustable colour temperature

The downlights, thanks to the CCT function, allow you to adjust the colour of light from 3000/4000/5000K. In addition, you benefit from the highest quality of light, thanks to the high colour rendering index Ra>85, which allows you to faithfully exhibit the colour of any space.



Mounting to various openings


The adjustable mounting rail allows the downlight to fit seamlessly into ceiling cutouts of various sizes, making installation faster, easier, and more flexible.

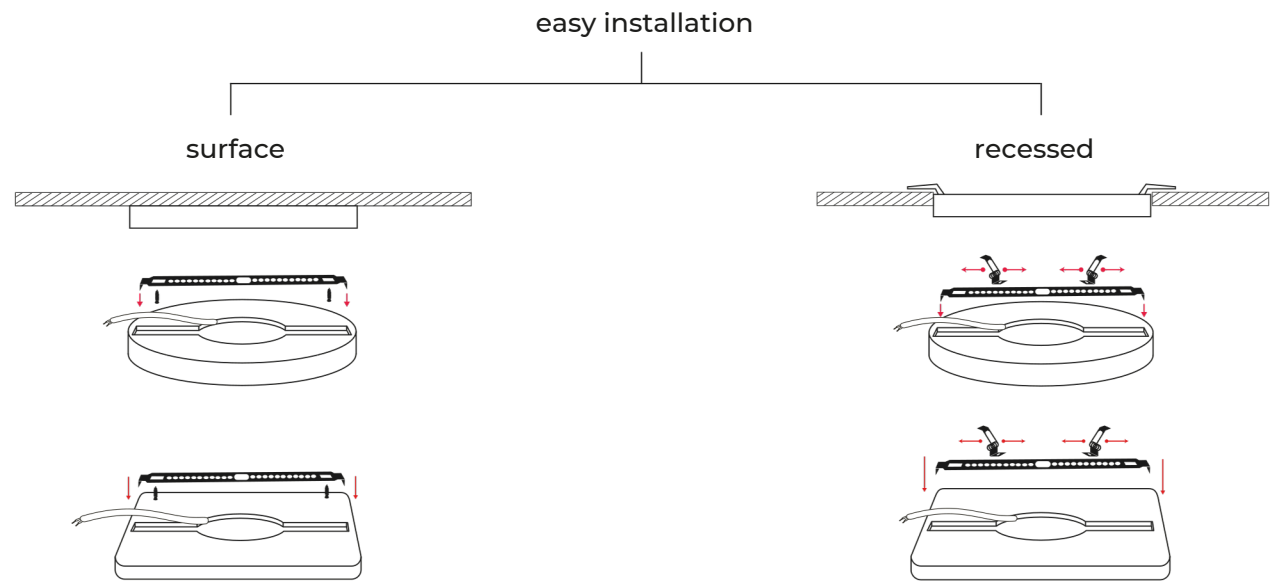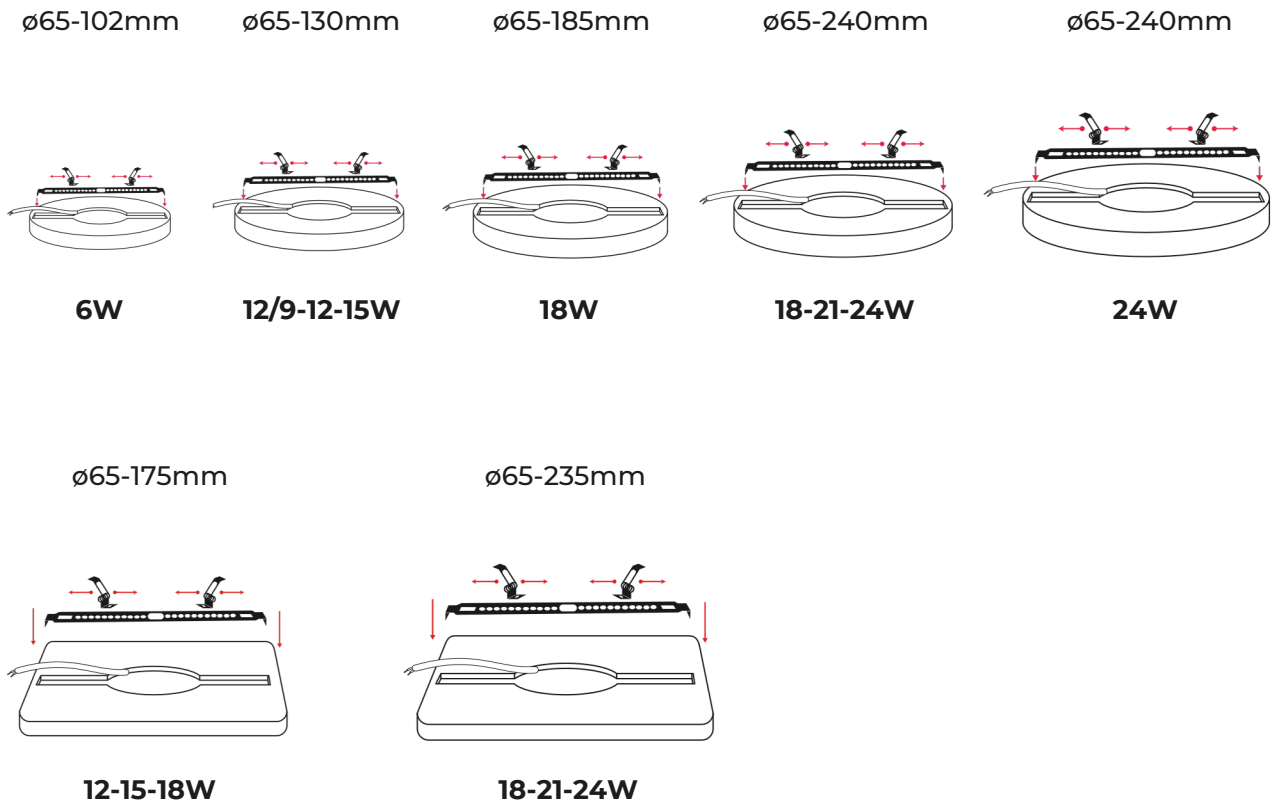

Downlight EASY FLEX round

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEL
209923 New	6	120	4000	450		
209930 New	12	120	4000	900		
209947 New	9 -12-15	120	4000	1120		
209961 New	9 -12-15	120	4000	1050		
209961 New	18	120	4000	1530		
209978 New	18	120	4000	1530		
210004 New	18-21-24	120	3000-4000-5000	2110		
210011 New	18-21-24	120	3000-4000-5000	2000		
209985 New	24	120	4000	2110		
209992 New	24	120	4000	2110		
210028 New	45	120	3000-4000-5000	4050		
210035 New	70	120	3000-4000-5000	6300		


DIMENSIONS [mm]

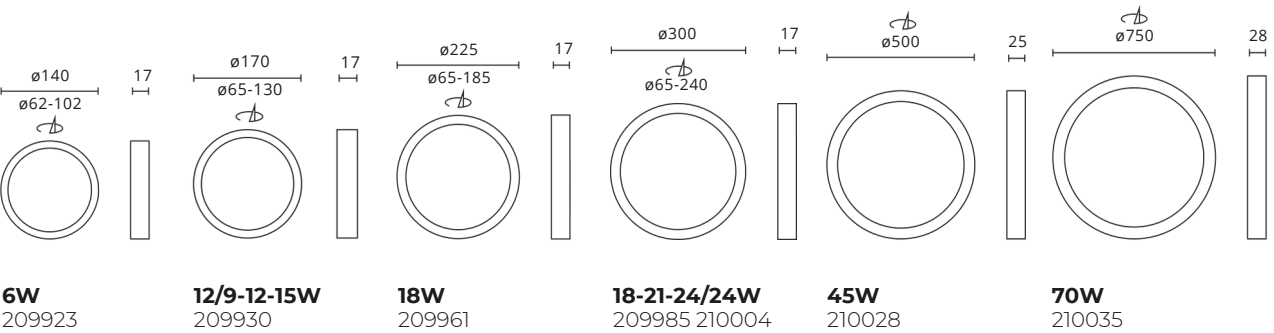

Downlight EASY FLEX square




SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
210103	New	12-15-18	120	3000-4000-5000	1530	



210110	New	12-15-18	120	3000-4000-5000	1440	
--------	-----	----------	-----	----------------	------	--




210127	New	18-21-24	120	3000-4000-5000	2110	
--------	-----	----------	-----	----------------	------	--




210134	New	18-21-24	120	3000-4000-5000	2000	
--------	-----	----------	-----	----------------	------	--

DIMENSIONS [mm]




12-15-18W
210103
210110



18-21-24W
210127
210134

Downlight EASY FLEX ceiling bracket



SYMBOL		LENGTH [cm]	COLOUR
210042	New	20 -50	
210059	New	50 -100	




210066	New	20 -50	
210073	New	50 -100	

Downlight EASY FLEX suspension kit





212237	New	120	
--------	-----	-----	--



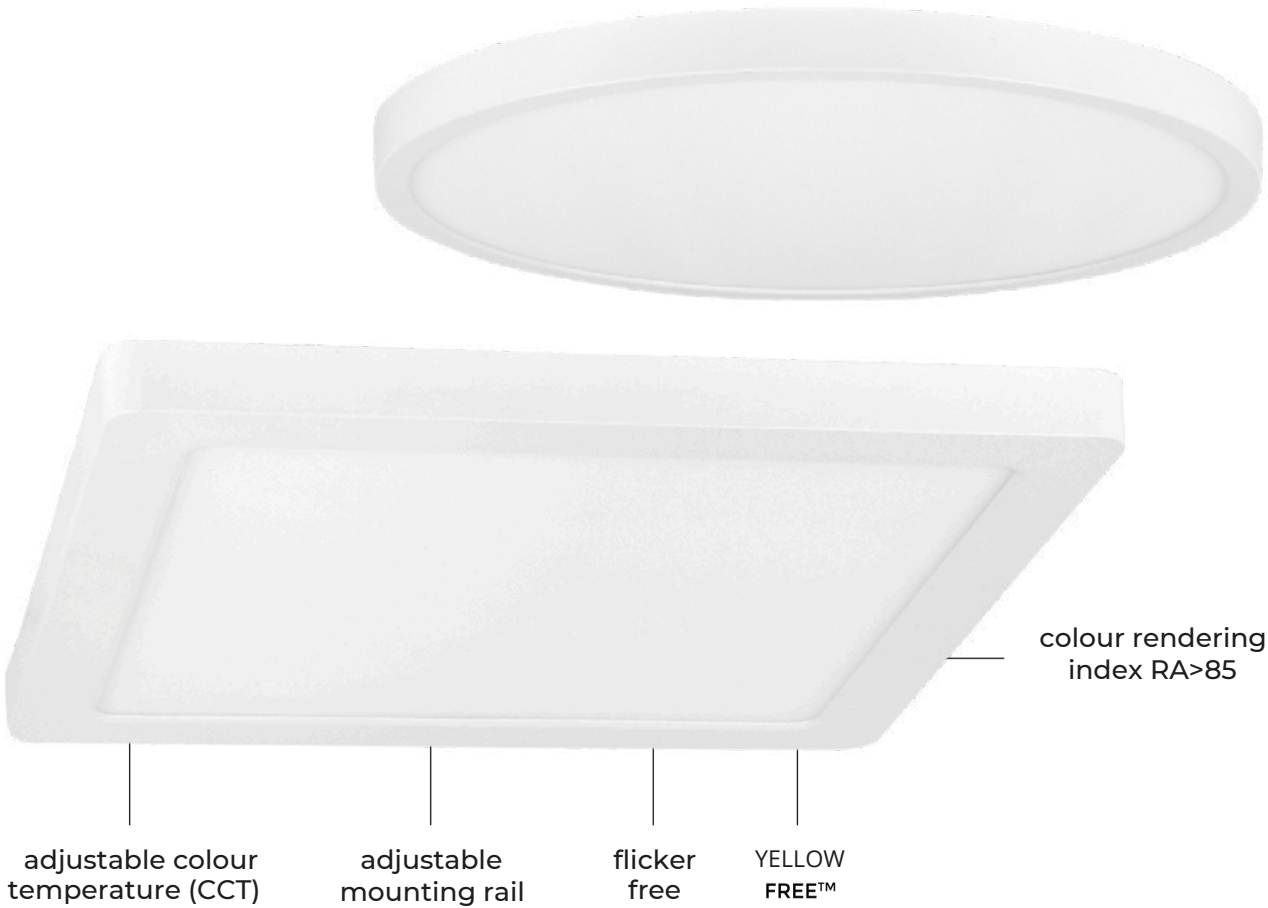

DOWNLIGHT EASY FIX PRO

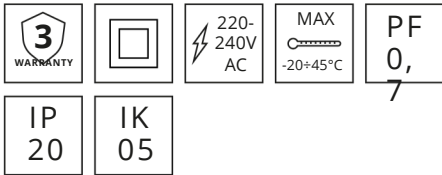

EFFICACY 90-100 lm/W

Power [W]:
6-24

Luminous flux [lm]:
540-2400

Beam angle [°]:
110

Colour temperature [K]:




Lifetime [h]:
L70B50 - 25.000



Light distributions

Downlight features a wide beam angle of 110°, providing even illumination over a large surface area with limited shadowing. Ideal solution for all open spaces.

Application of EASY FIX PRO – apartments, commercial buildings, corridors and communication zones, quick modernization of lighting installation.

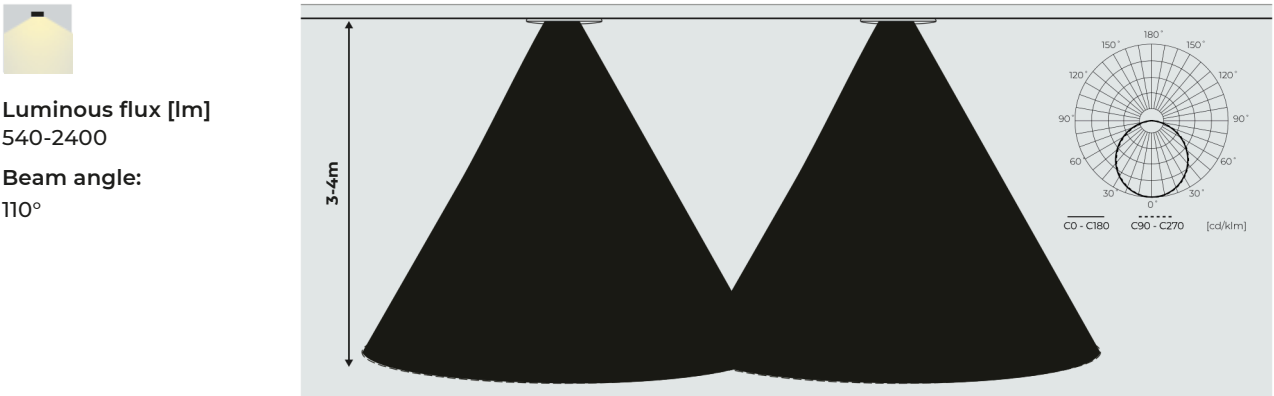


Adjustable colour temperature

The downlights, thanks to the CCT function, allow you to adjust the colour of light from 3000/4000/5000K. In addition, you benefit from the highest quality of light, thanks to the high colour rendering index Ra>85, which allows you to faithfully exhibit the colour of any space.



Mounting to various openings


The adjustable mounting rail allows the downlight to fit seamlessly into ceiling cutouts of various sizes, making installation faster, easier, and more flexible.

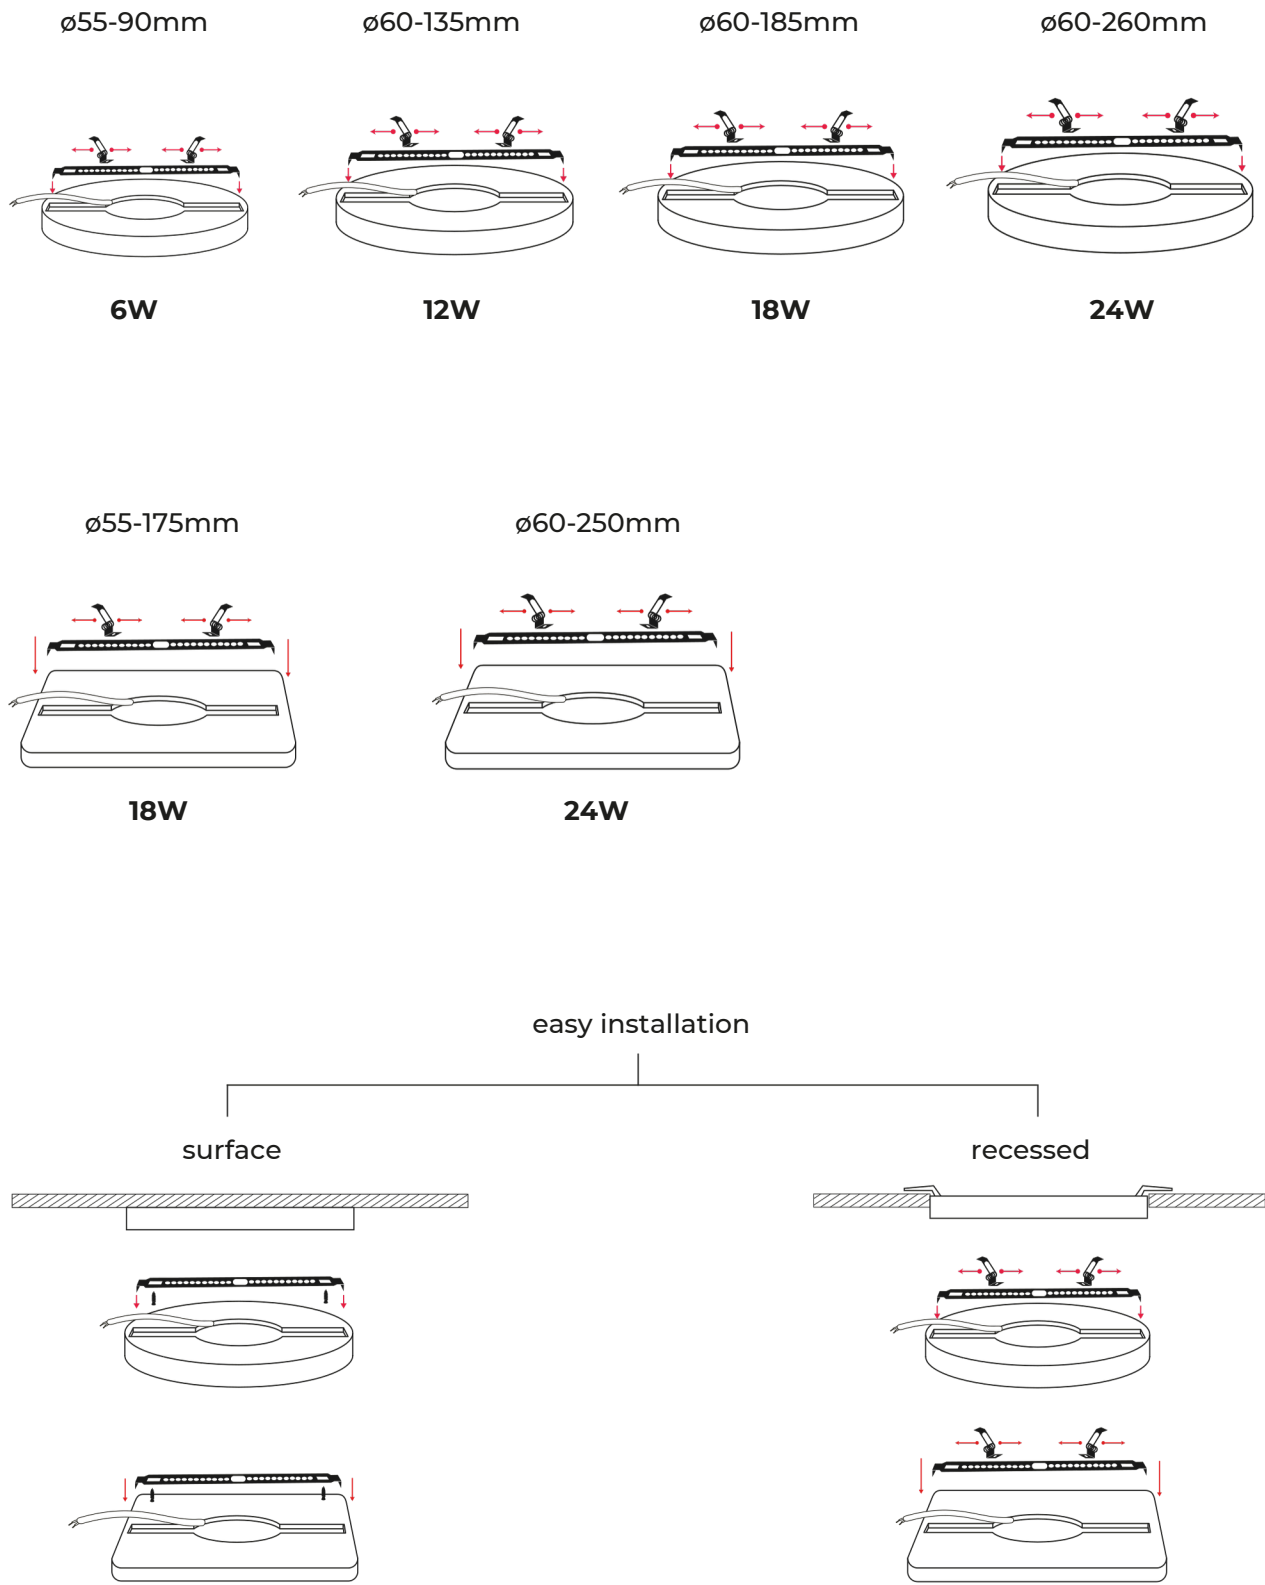


Downlight EASY FIX PRO



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	SHAPE	EEL
202825	6	110	3000-4000-5000 (CCT)	540	round	E
202832	12	110	3000-4000-5000 (CCT)	1080	round	E
202849	18	110	3000-4000-5000 (CCT)	1800	round	E
202863	18	110	3000-4000-5000 (CCT)	1800	square	
202856	24	110	3000-4000-5000 (CCT)	2400	round	E
202870	24	110	3000-4000-5000 (CCT)	2400	square	

DIMENSIONS [mm]

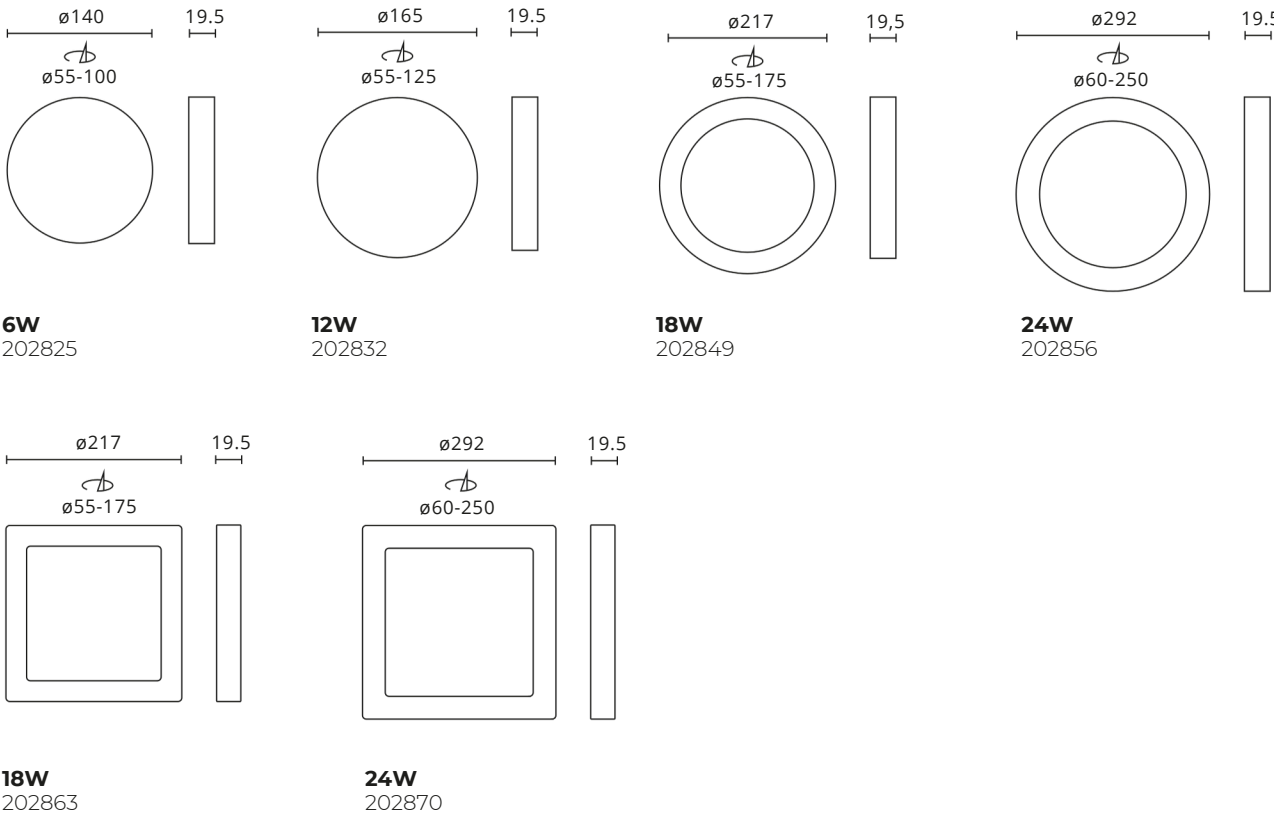


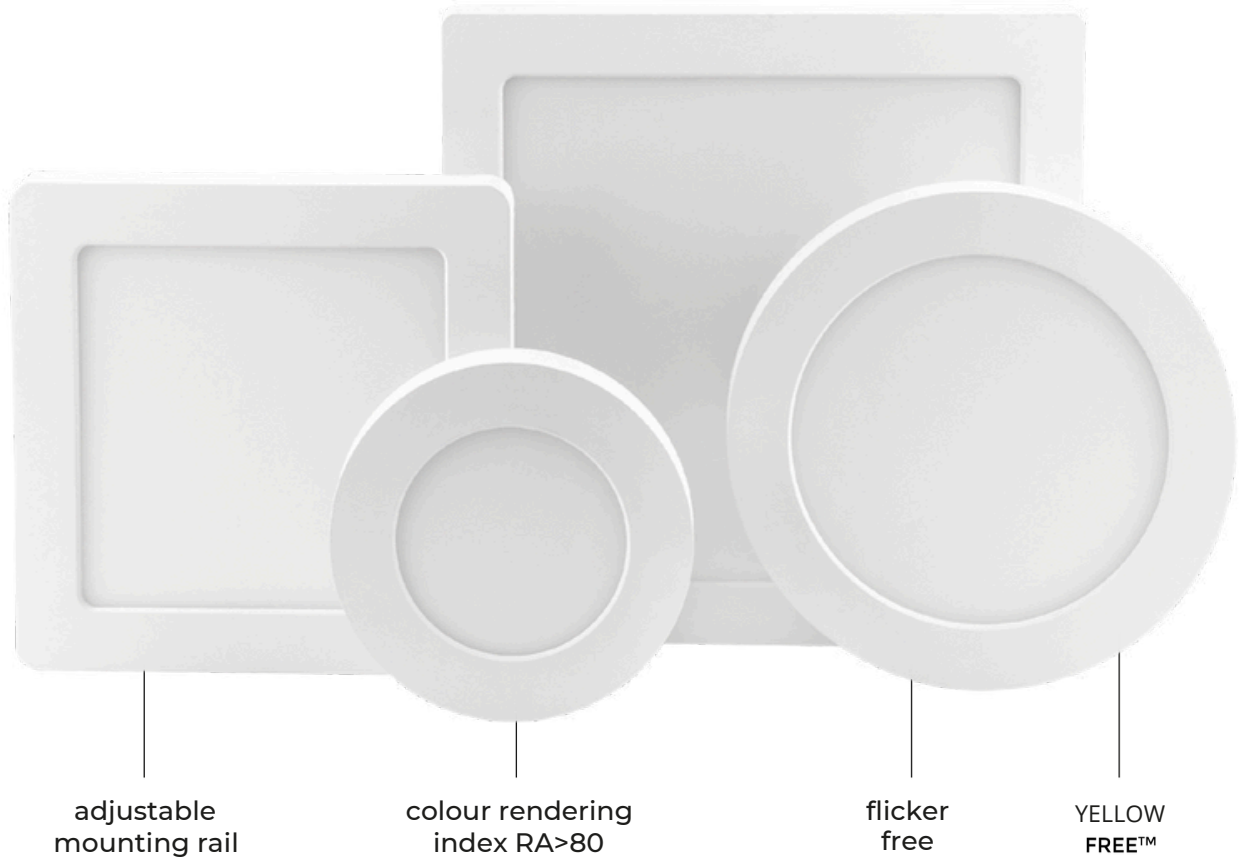

DOWNLIGHT EASY FIX

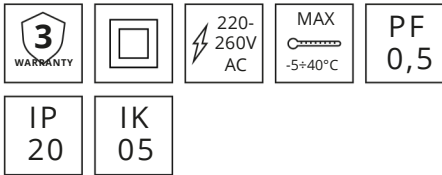

EFFICACY 71 lm/W
Power [W]:
6-24
Luminous flux [lm]:
450-2300
Beam angle [°]:
120
Colour temperature [K]:



Lifetime [h]:
L70B50 - 30.000
Housing:
polyamid


Light distributions

The downlight offers a wide 120° beam angle, delivering even and diffused illumination over a broad area. Perfect for general-purpose lighting with reduced shadowing.

Application of EASY FIX – apartments, utility rooms, stairwells, corridors, affordable lighting renovations.




Luminous flux [lm]
450-2300
Beam angle:
120°

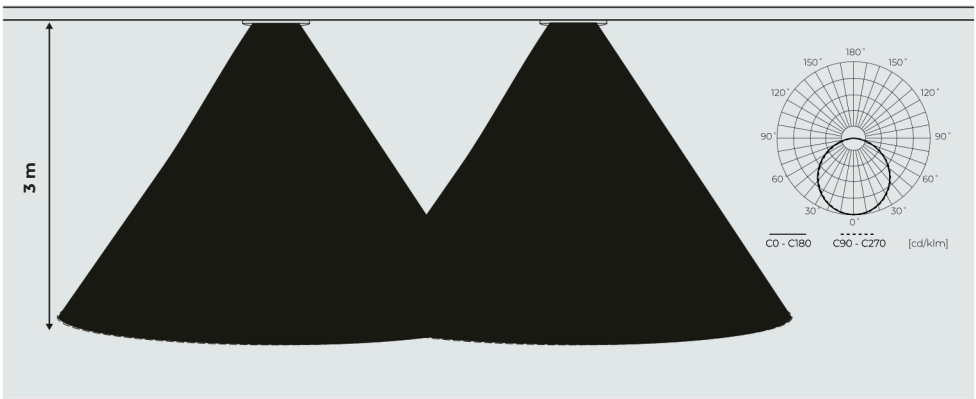


Mounting to various openings

EASY FIX round

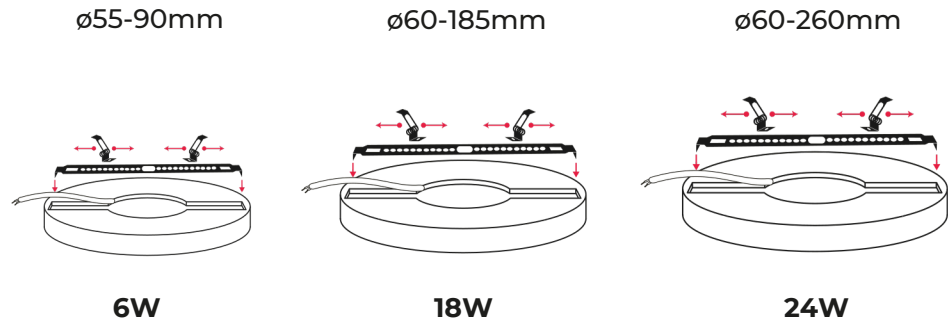


EASY FIX square

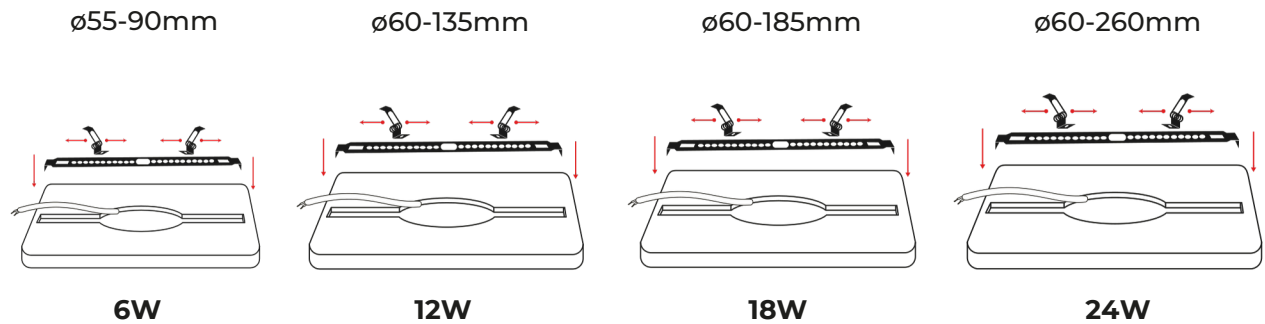


Downlight EASY FIX round

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	248771	6	120	2700	450
	248788	6	120	4000	470
	248818	18	120	2700	1570
	248825	18	120	4000	1650
	248832	24	120	2700	2200
	248849	24	120	4000	2300


DIMENSIONS [mm]



6W / ROUND
248771
248788






18W / ROUND
248818
248825




24W / ROUND
248818
248825


Downlight EASY FIX square

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
	246777	6	120	2700	450
	246784	6	120	4000	470
	246791	12	120	2700	850
	249457	18	120	2700	1300
	249464	18	120	4000	1450
	249471	24	120	2700	2150
	249488	24	120	4000	2300


DIMENSIONS [mm]




6W / SQUARE
246777
246784



12W / SQUARE
246791



18W / SQUARE
249457
249464



24W / SQUARE
249471
249488





DOWNLIGHT
MOLLY

3
WARRANTY

220-240V
AC

MAX

-20+40°C


PF
0,5

IP
20

IK
05

[View product page](#)

EFFICACY 90-105 lm/W
Power [W]:
5-24
Luminous flux [lm]:
450-2550
Beam angle [°]:
110
Colour temperature [K]:



Lifetime [h]:
L70B50 - 30.000
Housing:
polycarbonate

Downlight MOLLY 5W

SYMBOL	EFFICIENCY [lm/ W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	SHAPE	EEI
200739	90	110	3000	450	round	
20074	100	110	4000	500	round	
6	90	110	3000	450	square	
201033	100	110	4000	500	square	
201040						



Downlight MOLLY 9W

200753	90	110	3000	830	round	
200760	100	110	4000	900	round	
200838	90	110	3000	830	square	
200845	100	110	4000	900	square	




Downlight MOLLY 12W


200777	95	110	3000	1150	round	
200784	105	110	4000	1250	round	
200852	95	110	3000	1150	square	
200869	105	110	4000	1250	square	




DIMENSIONS [mm]




5W / ROUND
200739
200746




9W / ROUND
200753
200760




12W / ROUND
200777
200784



5W / SQUARE
201033
201040



9W / SQUARE
200838
200845



12W / SQUARE
200852
200869

Downlight MOLLY 18W

SYMBOL	EFFICIENCY [lm/W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	SHAPE	EEI
200791	100	110	3000	1750		round	
200807	105	110	4000	1900		round	
200999	100	110	3000-4000-6000 (CCT)	1900		round	
201019	105	110	4000	1900		round	
200876	100	110	3000	1750		square	
200883	105	110	4000	1900		square	




Downlight MOLLY 24W

200814	100	110	3000	2350		round	
200821	105	110	4000	2550		round	
201002	100	110	3000-4000-6000 (CCT)	2550		round	
201026	105	110	4000	2550		round	
200890	100	110	3000	2350		square	
200906	105	110	4000	2550		square	




DIMENSIONS [mm]




18W / ROUND

200791
200807
200999 201019




24W / ROUND

200814
200821
201002
201026



18W / SQUARE

200876 200883

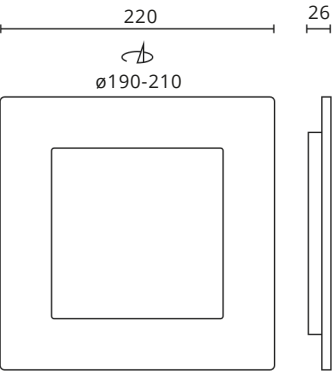

24W / SQUARE

200890 200906

Frame for surface mounting of downlight MOLLY round

SYMBOL	NAME
200913	Frame for surface mounting of Downlight MOLLY 9W round
200920	Frame for surface mounting of Downlight MOLLY 12W round
200937	Frame for surface mounting of Downlight MOLLY 18W round
200944	Frame for surface mounting of Downlight MOLLY 24W round




Frame for surface mounting of downlight MOLLY square

200951	Frame for surface mounting of Downlight MOLLY 9W square
200968	Frame for surface mounting of Downlight MOLLY 12W square
200975	Frame for surface mounting of Downlight MOLLY 18W square
200982	Frame for surface mounting of Downlight MOLLY 24W square



DIMENSIONS [mm]

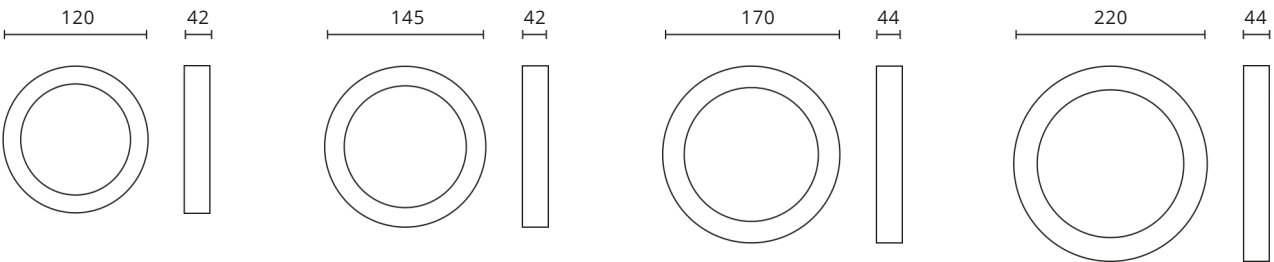


200913

200920

200937

200944

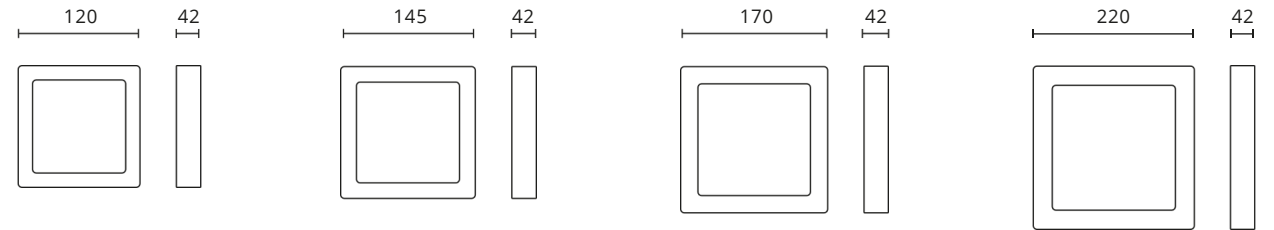

200951

200968

200975

200982



DOWNLIGHT
FRAMELESS

2
WARRANTY

220-240V
AC

MAX

-5÷40°C

PF
0,9

IP
20

[View product page](#)

EFFICACY 100 lm/W

Power [W]:
18

Luminous flux [lm]:
1800

Beam angle [°]:
180

Colour temperature [K]:

2700

4000

Lifetime [h]:
L70B50 - 30.000


Housing:
aluminium

Downlight FRAMELESS



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEL
470638	18	180	2700	1800	
470645	18	180	4000	1800	

DIMENSIONS [mm]



18W
47063
8
47064
5

LED line


LINEAR LUMINAIRES

FUSION
168


EXECULINE
180



04

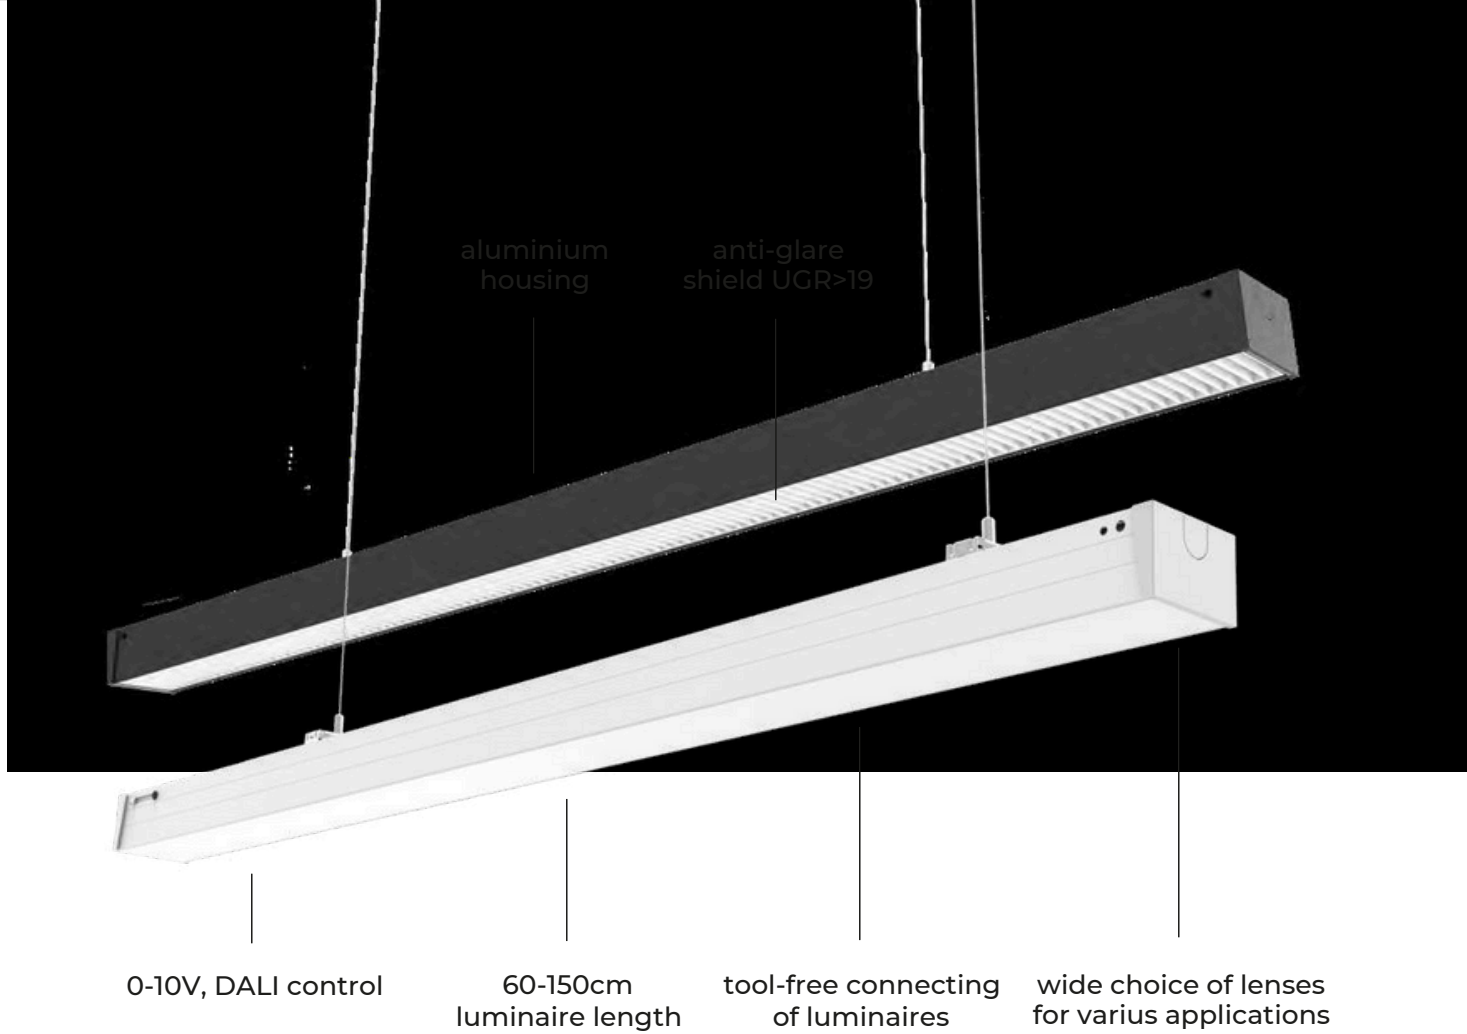

LINEAR LUMINAIRE FUSION


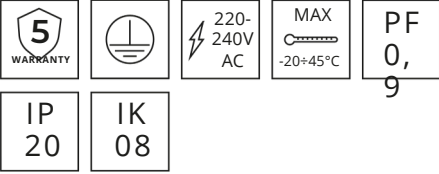


EFFICACY 130 lm/W
Power [W]:
 20-60
Luminous flux [lm]:
 2600-7800
Beam angle [°]:
 120, 30*90, 60*110, 90*110,
 120*120, LR40, P18
Colour temperature [°]:
 4000




Lifetime [h]:
 L70B50 - 50.000

Housing:
 aluminium

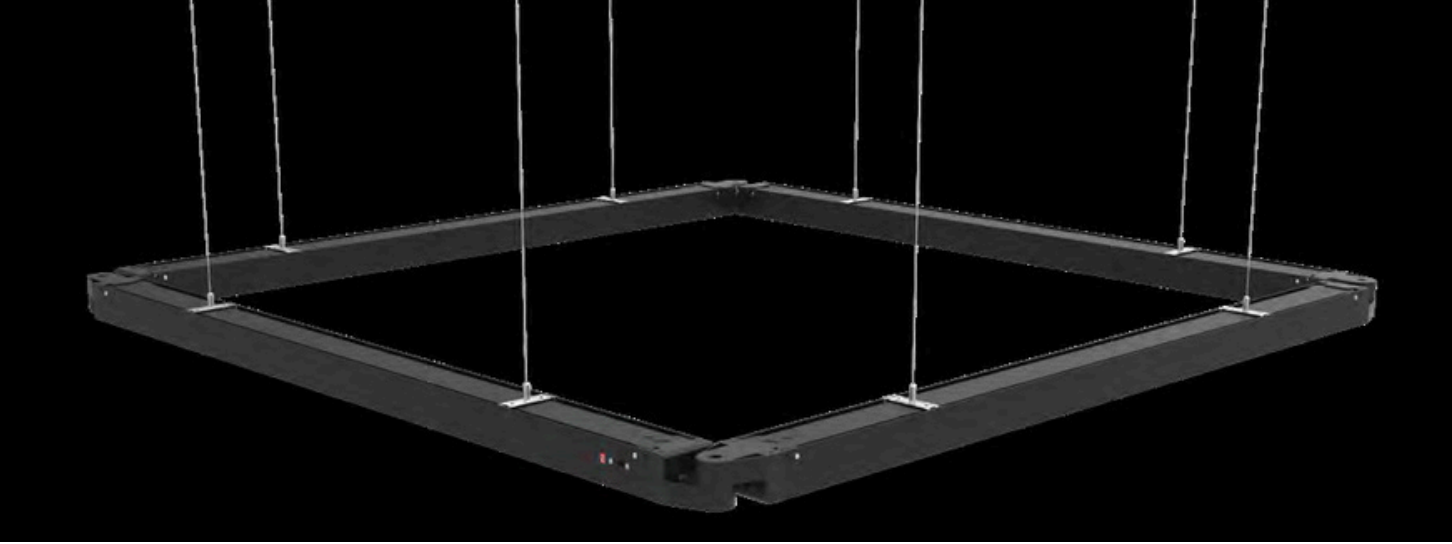


Modular system

FUSION allows for the creation of uniform, continuous lines of light thanks to a simple, almost tool-free luminaire connection system. Built-in connectors are standard equipment for each luminaire. In addition, the use of optional angle connectors allows you to design light systems of any shape - from simple lines to more complex configurations.

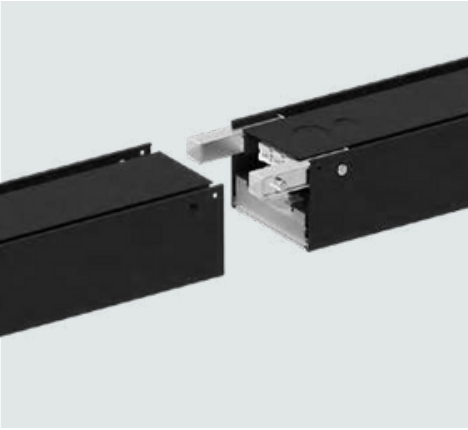


Create various shapes

The FUSION system gives you the opportunity to design custom lighting layouts, perfectly matching the character of the interior. Thanks to the use of angle connectors with a range of 90-270°, it is possible to create a variety of shapes - from letters and arches to geometric arrangements and spatial light compositions.

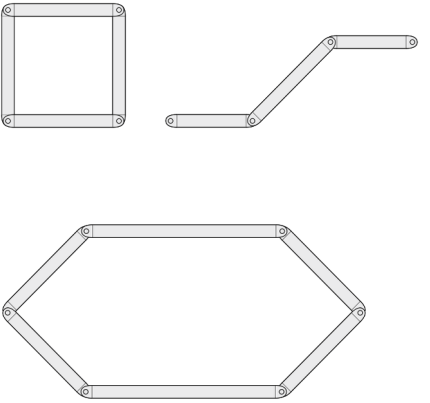

angle connector
90-270°

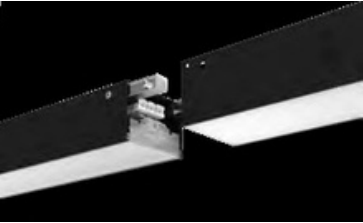

tool-free
connection



track light
module available




Light distributions

FUSION redefines flexibility in linear lighting. With a diverse range of beam angles and precisely engineered optics, the luminaire ensures uniform, controlled and efficient illumination – from general ambient lighting to task-specific solutions.


Flexible optics – wide range of beam angles (120°, 30×90°, 60×110°, 90×110°, 120×120°, LR40, P18) allows precise adaptation to different lighting needs.

Uniform illumination – optimized lens systems ensure consistent light distribution and visual comfort across various applications.


Directional control – tailored optics minimize glare and provide efficient lighting where it is needed most. A UGR>19 shield is also available for maximum comfort.

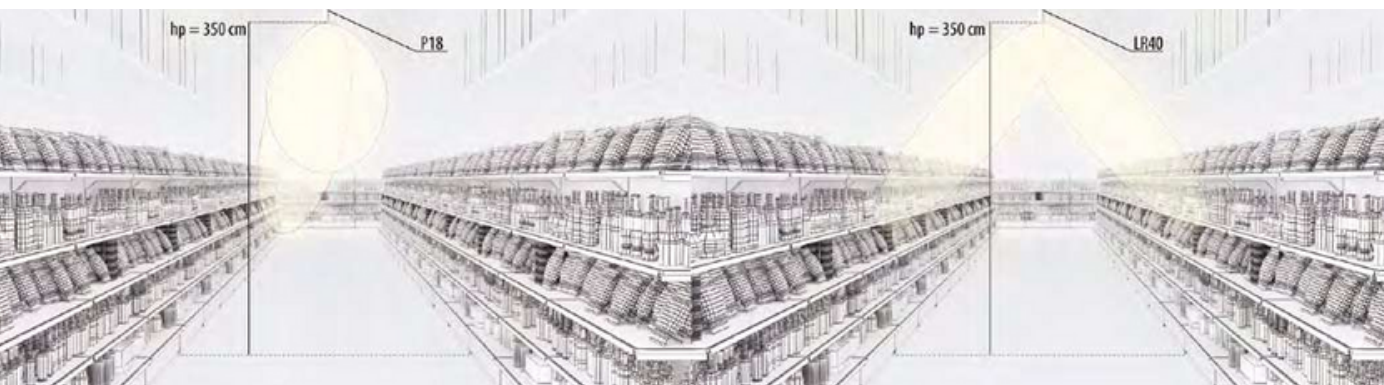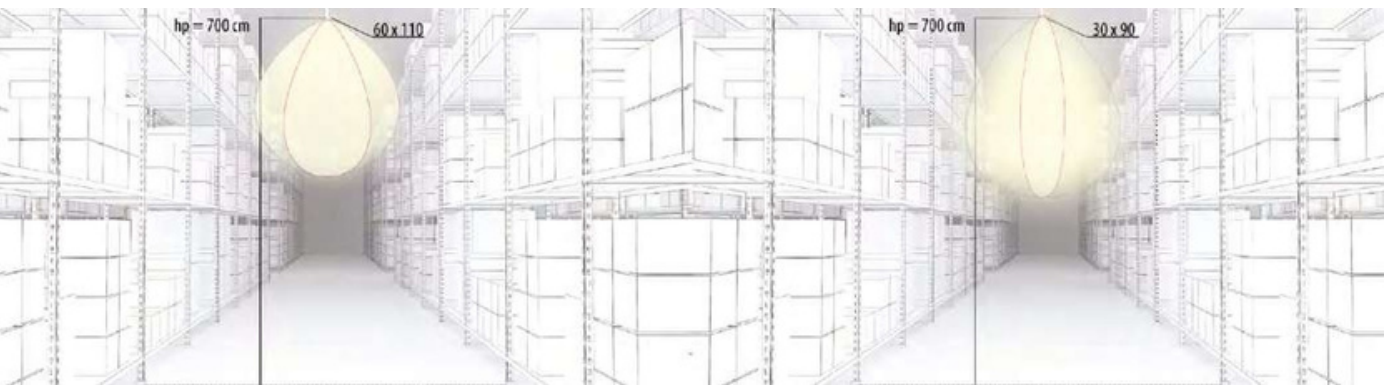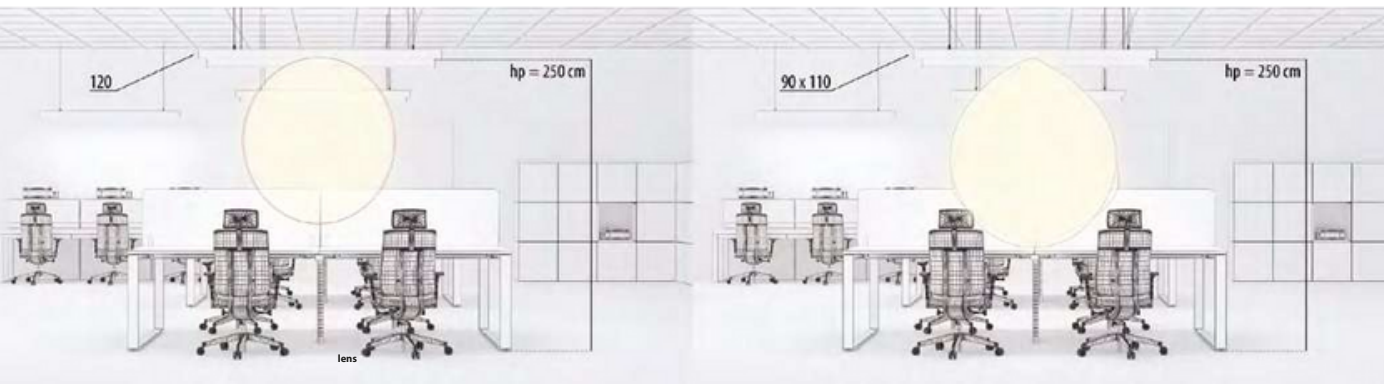


Application of FUSION optics

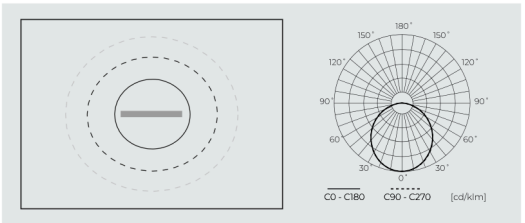


The **120°** illumination angle is a classic solution for wide light distribution. It provides uniform, diffused illumination without sharp contrasts. Ideal for general illumination of open spaces. **Application:** offices, traffic routes, stores, warehouses, back-of-house areas.

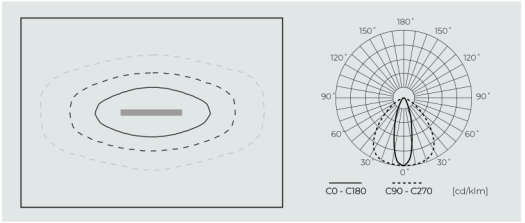


The **30×90°** angle allows the light to be precisely directed along narrow spaces. It reduces light loss to the sides and allows you to concentrate the beam where you need it. **Application:** long corridors, storage racks, working areas near walls, linear lighting near edges.

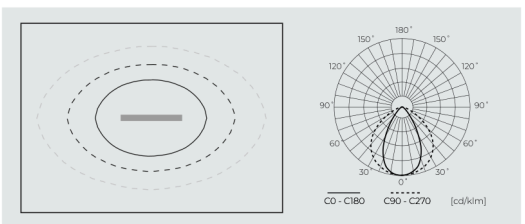


The **60×110°** distribution provides an optimal combination of luminous width and directional beam control. It reduces glare and allows efficient use of light. **Application:** traffic routes, production halls, workspaces, service areas.

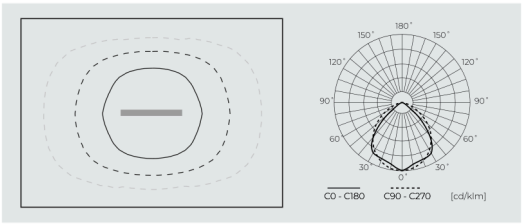

The angle of **90×110°** incidence is similar to that of the PC Cover 120° version except that it is slightly narrower, thus focusing the light mainly below the fixture. **Application:** residential spaces, stores and shopping malls, offices and commercial use spaces

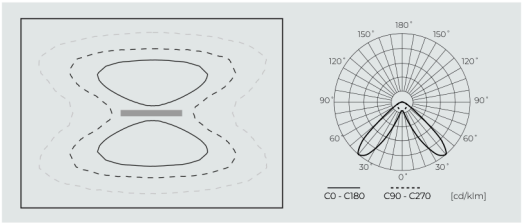

The **LR40** angle greatly facilitates illumination on both sides of the luminaire. Items on the sides of the luminaire are more strongly illuminated, and the area under the luminaire is gently illuminated. **Application:** residential spaces, stores and shopping malls, offices and commercial use spaces

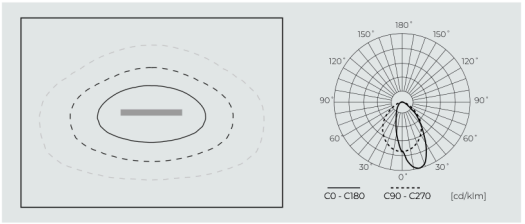


The **P18** angle directs light downward and in a specific direction, making it possible, for example, to illuminate a passageway with one additional item, such as a shelf in a store. **Application:** warehouses, production halls, stores and shopping malls.

Linear lamp FUSION 20W black



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEL
475466	20	120	4000	2600		
475480	20	30° 90	4000	2600		
475497	20	60° 110	4000	2600		
475503	20	90° 110	4000	2600		
475602	20	120° 120	4000	2600		
475619	20	LR40	4000	2600		
475626	20	P18	4000	2600		
475633	20	120	4000	2600	●	ATG C
475640	20	30° 90	4000	2600	●	
475657	20	60° 110	4000	2600	●	
475664	20	90° 110	4000	2600	●	
475701	20	120° 120	4000	2600	●	
475718	20	LR40	4000	2600	●	
475725	20	P18	4000	2600	●	

DIMENSIONS [mm]




FUSION 20W

Linear lamp FUSION 40W black



SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEL
475732	40	120	4000	5200		
475749	40	30° 90	4000	5200		
475756	40	60° 110	4000	5200		
475763	40	90° 110	4000	5200		
475800	40	120° 120	4000	5200		
475817	40	LR40	4000	5200		
475824	40	P18	4000	5200		
475831	40	120	4000	5200	●	ATG C
475848	40	30° 90	4000	5200	●	
475855	40	60° 110	4000	5200	●	
475862	40	90° 110	4000	5200	●	
475909	40	120° 120	4000	5200	●	
475916	40	LR40	4000	5200	●	
475923	40	P18	4000	5200	●	

Linear lamp FUSION 60W black



475930	60	120	4000	7800		
475947	60	30° 90	4000	7800		
475954	60	60° 110	4000	7800		
475961	60	90° 110	4000	7800		
476012	60	120° 120	4000	7800		
476029	60	LR40	4000	7800		
478962	60	P18	4000	7800		
478979	60	120	4000	7800	●	ATG C
478986	60	30° 90	4000	7800	●	
478993	60	60° 110	4000	7800	●	
479006	60	90° 110	4000	7800	●	
479662	60	120° 120	4000	7800	●	
479679	60	LR40	4000	7800	●	
479686	60	P18	4000	7800	●	

DIMENSIONS [mm]




FUSION 40W

FUSION 60W

Linear lamp FUSION 20W white

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEI
203259	20	120	4000	2600		
203983	20	30* 90	4000	2600		
203990	20	60* 110	4000	2600		
204003	20	90* 110	4000	2600		
204010	20	120* 120	4000	2600		
204027	20	LR40	4000	2600		
204034	20	P18	4000	2600		
204041	20	120	4000	2600	●	ATG C
204508	20	30* 90	4000	2600	●	
204058	20	60* 110	4000	2600	●	
204065	20	90* 110	4000	2600	●	
204072	20	120* 120	4000	2600	●	
204089	20	LR40	4000	2600	●	
204096	20	P18	4000	2600	●	

DIMENSIONS [mm]



FUSION 20W


Linear lamp FUSION 40W white

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	0-10V	EEI
203266	40	120	4000	5200		
204102	40	30* 90	4000	5200		
204119	40	60* 110	4000	5200		
204126	40	90* 110	4000	5200		
204133	40	120* 120	4000	5200		
204140	40	LR40	4000	5200		
204157	40	P18	4000	5200		
205574	40	120	4000	5200	●	ATG C
204164	40	30* 90	4000	5200	●	
204171	40	60* 110	4000	5200	●	
204188	40	90* 110	4000	5200	●	
204195	40	120* 120	4000	5200	●	
204201	40	LR40	4000	5200	●	
204218	40	P18	4000	5200	●	

Linear lamp FUSION 60W white

203273	60	120	4000	7800		
204225	60	30* 90	4000	7800		
204232	60	60* 110	4000	7800		
204249	60	90* 110	4000	7800		
204256	60	120* 120	4000	7800		
204263	60	LR40	4000	7800		
204270	60	P18	4000	7800		
205581	60	120	4000	7800	●	ATG C
204287	60	30* 90	4000	7800	●	
204294	60	60* 110	4000	7800	●	
204300	60	90* 110	4000	7800	●	
204317	60	120* 120	4000	7800	●	
204324	60	LR40	4000	7800	●	
204331	60	P18	4000	7800	●	

DIMENSIONS [mm]




FUSION 40W

FUSION 60W



FUSION anti-glare shield

SYMBOL	NAME	COMPATIBLE PRODUCTS
203587	ANTI GLARE SHIELD UGR<19 black	FUSION 20W/40W/60W
2 03570	ANTI GLARE SHIELD UGR<19 white	FUSION 20W/40W/60W



FUSION adjustable connector



SYMBOL	NAME	COMPATIBLE PRODUCTS	ANGLE
479709	ADJUSTABLE CONNECTOR black	FUSION 20W/40W/60W	-90° ÷ +90°
202894	ADJUSTABLE CONNECTOR black 1-10V	FUSION 20W/40W/60W	-90° ÷ +90°
203426	ADJUSTABLE CONNECTOR white	FUSION 20W/40W/60W	-90° ÷ +90°
203433	ADJUSTABLE CONNECTOR white 1-10V	FUSION 20W/40W/60W	-90° ÷ +90°



FUSION L connector

SYMBOL	NAME	COMPATIBLE PRODUCTS	ANGLE
204553	L CONNECTOR black	FUSION 20W/40W/60W	90°
204560	L CONNECTOR white	FUSION 20W/40W/60W	90°



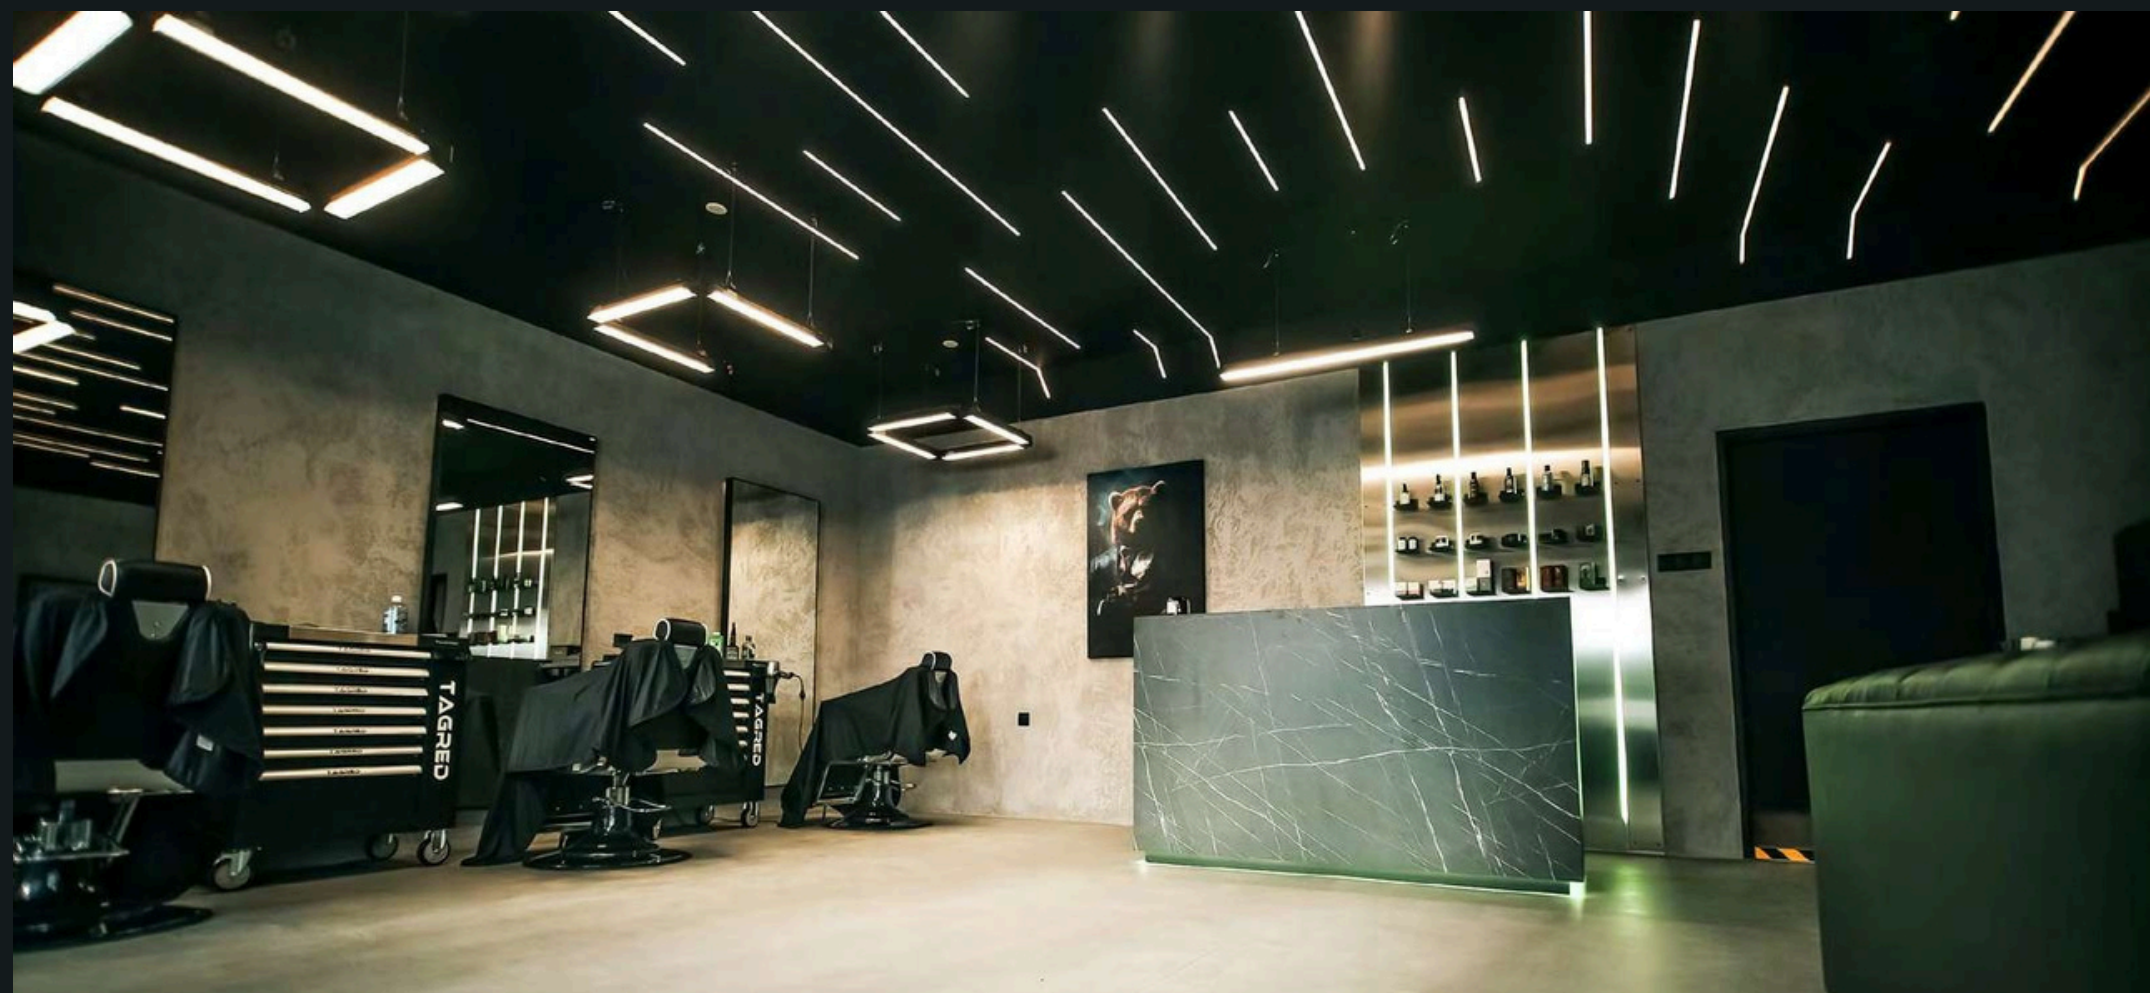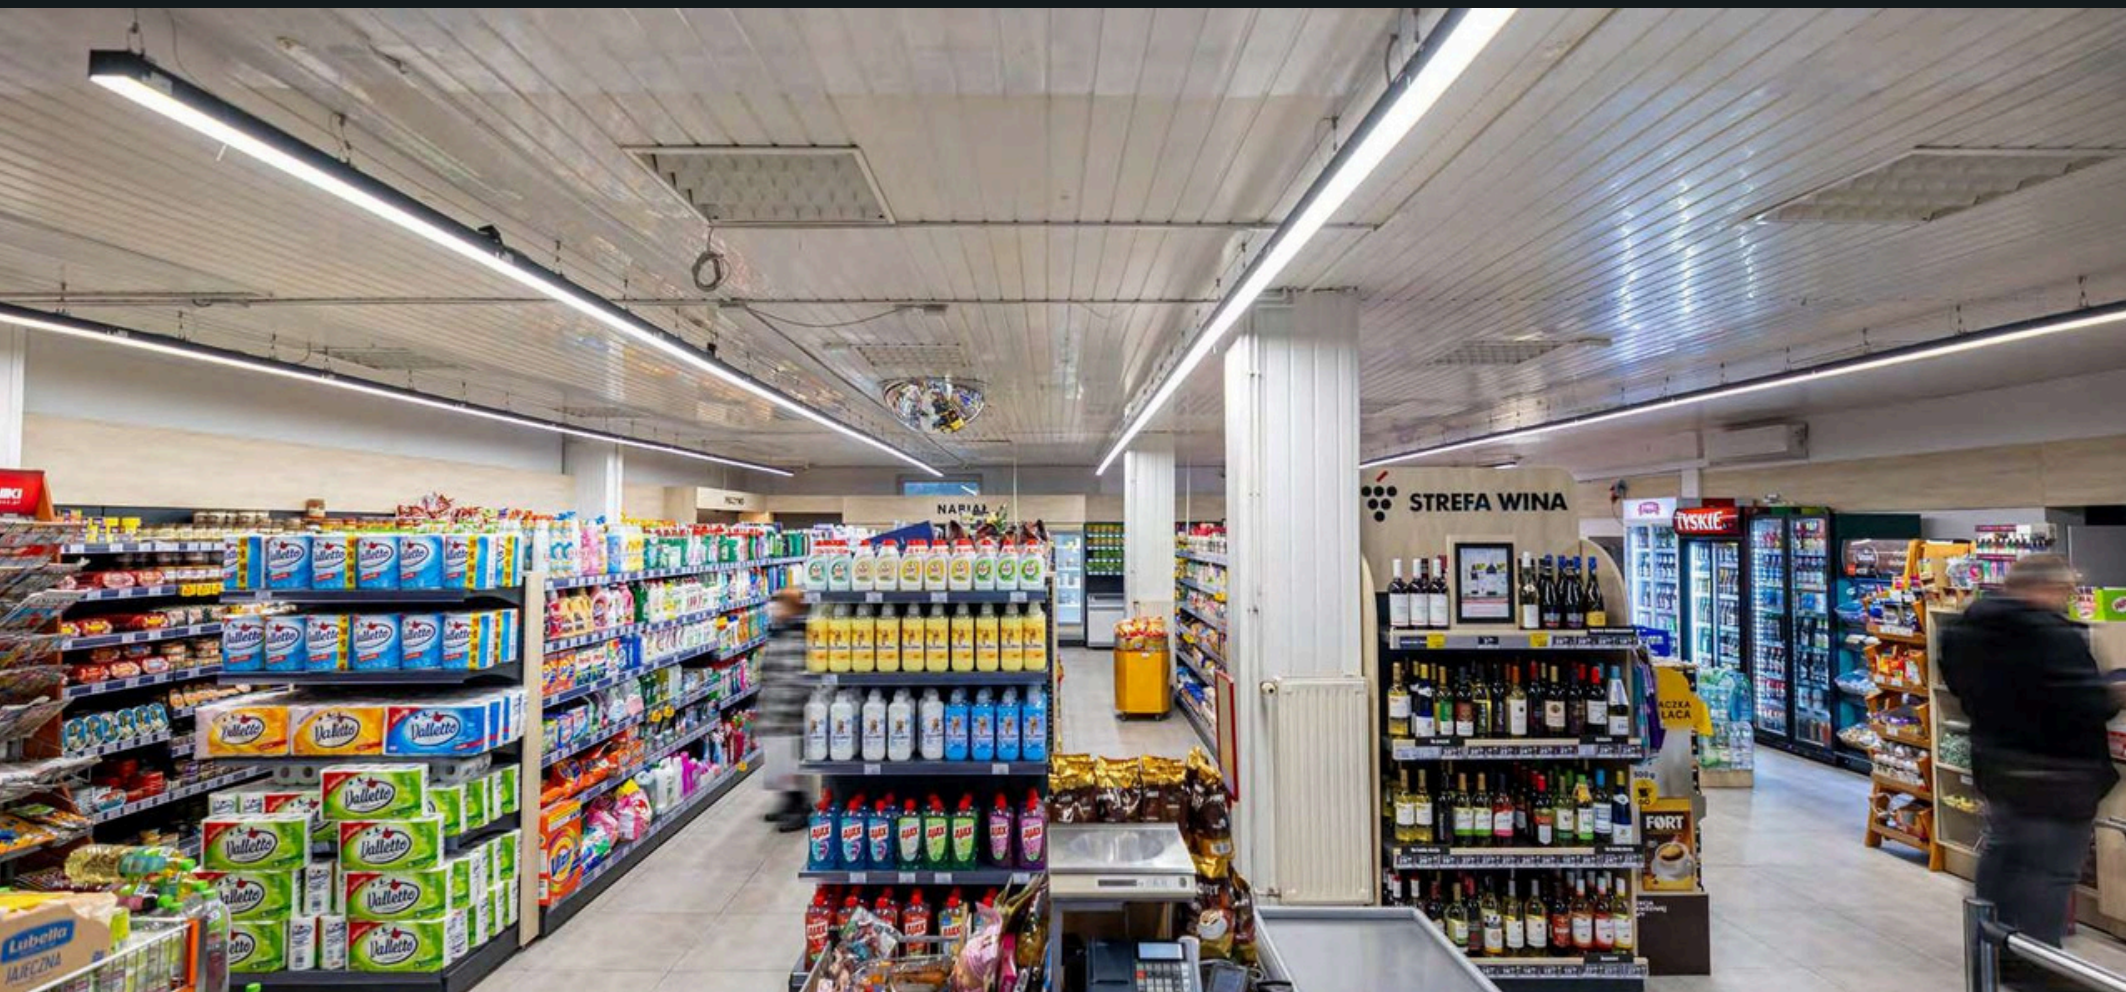


100 cm power cable
and suspension set



Luminous flux [lm]
3750-3900

Beam angle:
96°

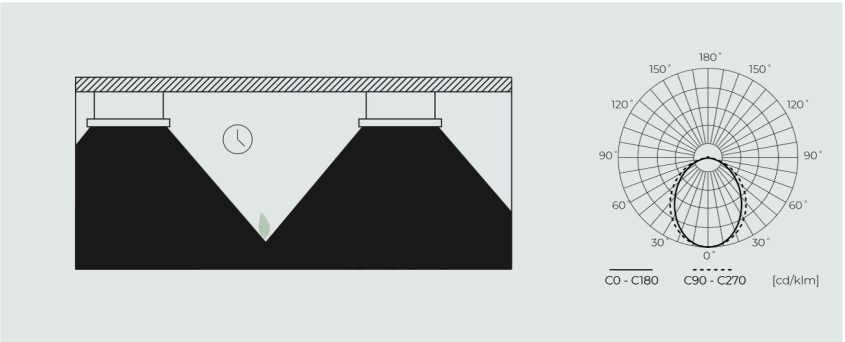

Linear lamp EXECULINE black

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
207813	30	96	4000	3750	

Linear lamp EXECULINE white

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
207806	30	96	4000	3900	

LINEAR LUMINAIRE
EXECULINE

5
WARRANTY

220-240V
AC

MAX

-15÷45°C

PF
0,9

IP
20

IK
08

EFFICACY 125-130 lm/W
Power [W]:
30
Luminous flux [lm]:
3750-3900
Beam angle [°]:
96
Colour temperature [°]:
4000




Lifetime [h]:
L70B50 - 50.000

Housing:
aluminium



DIMENSIONS [mm]



EXECULINE
207813
207806

[View product page](#)

LED line

TRACK LIGHTS

LUMICANTO
184

PIPE
196

05

colour temperature
(CCT) adjustment switch
3000- 4000- 6000K





tool-free access to the
DIP switch for power
changes



Bridgelux LEDs
CRI>90

TRACK LIGHT LUMICANTO

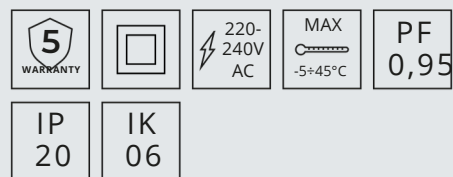


[View product page](#)

**EFFICACY UP TO 120
lm/W**

Power [W]: 6-20, 14-29,
12-42

Luminous flux [lm]:
620-2000, 1440-3200,
1300-4300 Beam angle

[°]:
36, 60, GU10 source angle
Colour temperature [°]:



Lifetime [h]:
L70B50 - 50.000

Housing:
aluminium




includes two
headlights:
36° and 60°

GU10
light source

Adjustment:

vertically


horizontally

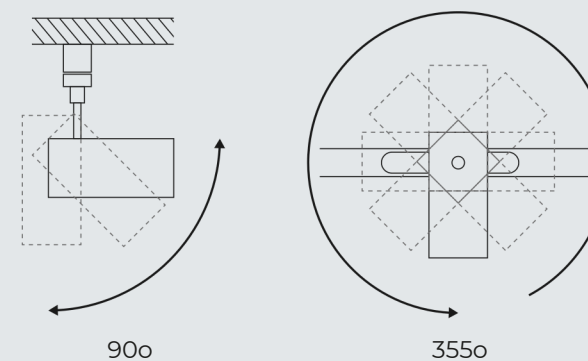

Installation:

surface

suspended

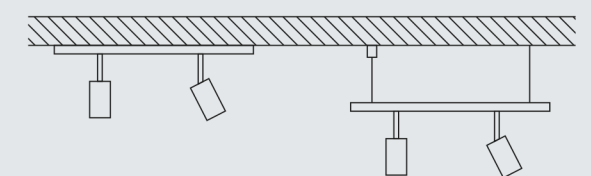



TRACK LIGHT LUMICANTO SYSTEM

Our innovative lighting system allows up to 96 configurations by combining adjustable colour temperature and power settings. The integrated power supply features two switches: one for selecting colour temperature in three ranges, and a DIP switch with 16 power levels to precisely control light output. A wide selection of connectors and accessories enables the creation of impressive, flexible lighting installations tailored to any space.



Accurate Color Rendering




A high Ra>90 rating ensures excellent colour fidelity, making it ideal for highlighting illuminated surfaces and objects with true-to-life colors.

High-Quality Components

The LUMICANTO track lighting system is built with top-tier components, including Bridgelux LEDs and KGP power supplies, ensuring exceptional luminous efficiency and durability. Supported by a 5-year warranty for added peace of mind.

Applications

With versatile options in wattage, colour temperature, lens and a wide range of connectors the LUMICANTO series luminaires are perfectly suited for illuminating office spaces, shopping malls, museums, and contemporary interior designs.

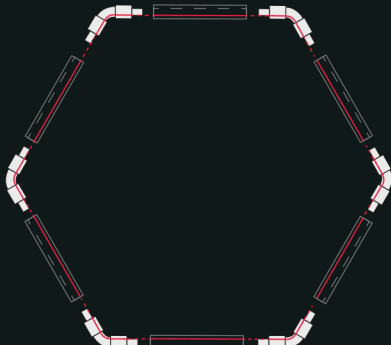



36°



60°



15-30°



40-60°



60-90°



>100°

Precision illumination - 36°

The LUMICANTO projector with a 36° beam angle delivers precise and focused lighting, making it the ideal choice for accentuating architectural details, highlighting artwork, or creating contrasts in retail and gallery spaces. Perfect for applications where controlled, high-intensity lighting is essential.

Versatile coverage – 60°

For spaces requiring balanced illumination, the LUMICANTO projector with a 60° beam angle offers the perfect solution. This beam angle ensures uniform lighting, reducing harsh contrasts and creating a welcoming atmosphere.

Unlimited possibilities with GU10 light sources


The flexibility of GU10 light sources in LUMICANTO projectors allows for a wide range of beam angles, starting from 15° and beyond, offering unmatched adaptability. With varied colour temperatures and lumen outputs, GU10 lamps provide endless creative.

POWER SETTINGS

POWER [W]	OUTPUT CURRENT [mA]	PF	1	2	3	4	EFFECTIVE LUMINOUS FLUX OBTAINED DIRECTLY FROM THE LUMINAIRE [lm]		
							3000K	4000K	6000K
Track light LUMICANTO 6-20W									
6	300	≥0.7	-	-	-	-	620	650	670
8	400	≥0.7	-	-	ON	-	825	860	865
10,0	500	≥0.8	-	ON	-	-	1000	1050	1060
11,7	600	≥0.8	-	ON	ON	-	1190	1270	1280
13,7	700	≥0.9	ON	-	-	-	1410	1500	1500
15,5	800	≥0.9	ON	-	ON	-	1580	1680	1690
17,4	900	≥0.9	ON	ON	-	-	1700	1850	1850
20,0	1000	≥0.9	ON	ON	ON	-	1832	2000	1975
Track light LUMICANTO 12-42W									
12,0	300	≥0.9	-	-	-	-	1289	1380	1439
14,4	350	≥0.9	-	-	-	ON	1486	1617	1675
16,4	400	≥0.95	-	-	ON	-	1719	1827	1879
18,5	450	≥0.95	-	-	ON	ON	1919	2110	2150
20,4	500	≥0.95	-	ON	-	-	2125	2291	2323
22,5	550	≥0.95	-	ON	-	ON	2315	2513	2541
24,4	600	≥0.95	-	ON	ON	-	2488	2719	2734
26,4	650	≥0.95	-	ON	ON	ON	2679	2893	2881
28,9	700	≥0.95	ON	-	-	-	2925	3143	3125
31,0	750	≥0.95	ON	-	-	ON	3093	3293	3253
32,8	800	≥0.95	ON	-	ON	-	3181	3463	3406
34,8	850	≥0.95	ON	-	ON	ON	3372	3659	3572
36,4	900	≥0.95	ON	ON	-	-	3475	3793	3682
38,5	950	≥0.95	ON	ON	-	ON	3681	3997	3858
40,3	1000	≥0.95	ON	ON	ON	-	3790	4155	0,39
42,0	1050	≥0.95	ON	ON	ON	ON	3929	4292	4097
Track light LUMICANTO 14-29W									
14	350	≥0.9	-	-	-	ON	1442	1578	1590
15,5	400	≥0.9	-	-	ON	-	1635	1801	1810
17,5	450	≥0.9	-	-	ON	ON	1806	2020	2047
19,3	500	≥0.9	-	ON	-	-	2005	2217	2224
21,3	550	≥0.9	-	ON	-	ON	2197	2471	2481
2,31	600	≥0.9	-	ON	ON	-	2370	2609	2621
25,1	650	≥0.9	-	ON	ON	ON	2554	2810	2825
27,4	700	≥0.9	ON	-	-	-	2729	3004	3013
29,0	750	≥0.9	ON	-	-	ON	2950	3195	3195
0									

Track light LUMICANTO 14-29W

SYMBOL	POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	COLOUR	EEL
210486	14-29	36/60°	3000-4000-6000 (CCT)	1442-3195	●	
210516	14-29	36/60°	3000-4000-6000 (CCT)	1442-3195	○	



Track light LUMICANTO 6-20W

210493	6-20	36/60°	3000-4000-6000 (CCT)	620-2000	●	
210523	6-20	36/60°	3000-4000-6000 (CCT)	620-2000	○	



Track light LUMICANTO 12-42W

210509	12-42	36/60°	3000-4000-6000 (CCT)	1289-4292	●	
210530	12-42	36/60°	3000-4000-6000 (CCT)	1289-4292	○	




Track light LUMICANTO GU10


SYMBOL	LIGHT SOURCE	POWER [W]	COLOUR
210899	GU10	max 50	●
210905	GU10	max 50	○




DIMENSIONS [mm]



14-29W
210486
210516




6-20/12-42W
210493
210523
210509
210530



GU10
210899
210905

AVAILABLE ACCESSORIES



3-Circuit rail for LUMICANTO

SYMBOL	LENGTH [m]	COLOUR
210578	1	●
210547	1	○
210585	2	●
210554	2	○
210592	3	●
210561	3	○

Suspension kit with auto-regulation for LUMICANTO

SYMBOL	LENGTH [m]	COLOUR
210837	1,5	●
210820	1,5	○
210851	3	●
210844	3	○
210875	8	●
210868	8	○



Flexible Connector for LUMICANTO

SYMBOL	TYPE	POWER CONNECTION	COLOUR
210790	flexible		●
210783	flexible		○



I Connector for LUMICANTO

210639	I	●	●
210622	I	●	○



Mini I Connector for LUMICANTO

210615	I		●
210608	I		○



Left L Connector for LUMICANTO

210653	L		●
210646	L		○



Right L Connector for LUMICANTO

210714	L	●	●
210707	L	●	○



Left T Connector for LUMICANTO

210660	T	●	●
210677	T	●	○



Right T Connector for LUMICANTO

210738	T	●	●
210721	T	●	○



X Connector for LUMICANTO

SYMBOL	TYPE	POWER CONNECTION	COLOUR
			
210691	X	●	●
210684	X	●	○

Left Power Supply Connector for LUMICANTO

			
210776	end feed	●	●
210769	end feed	●	○


Right Power Supply Connector for LUMICANTO

			
210752	end feed	●	●
210745	end feed	●	○


End Cap for LUMICANTO

			
210806	end cap		●
210813	end cap		○

All LUMICANTO connectors

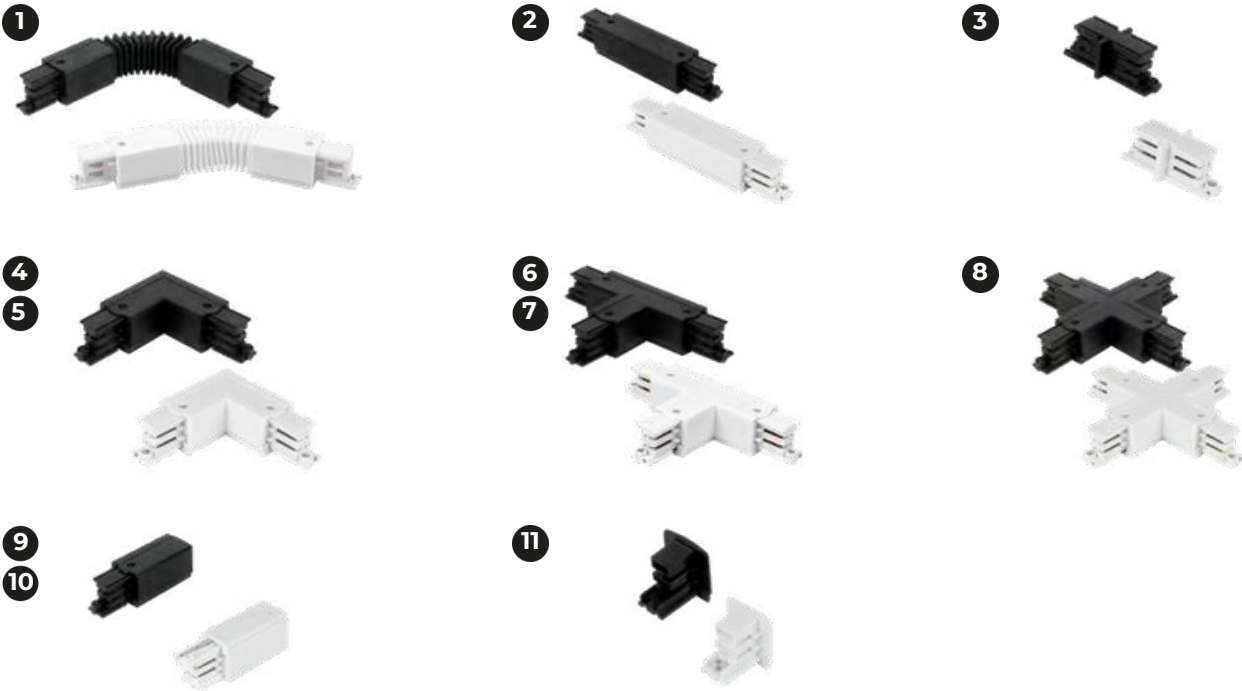

RAIL CONNECTION DIAGRAM

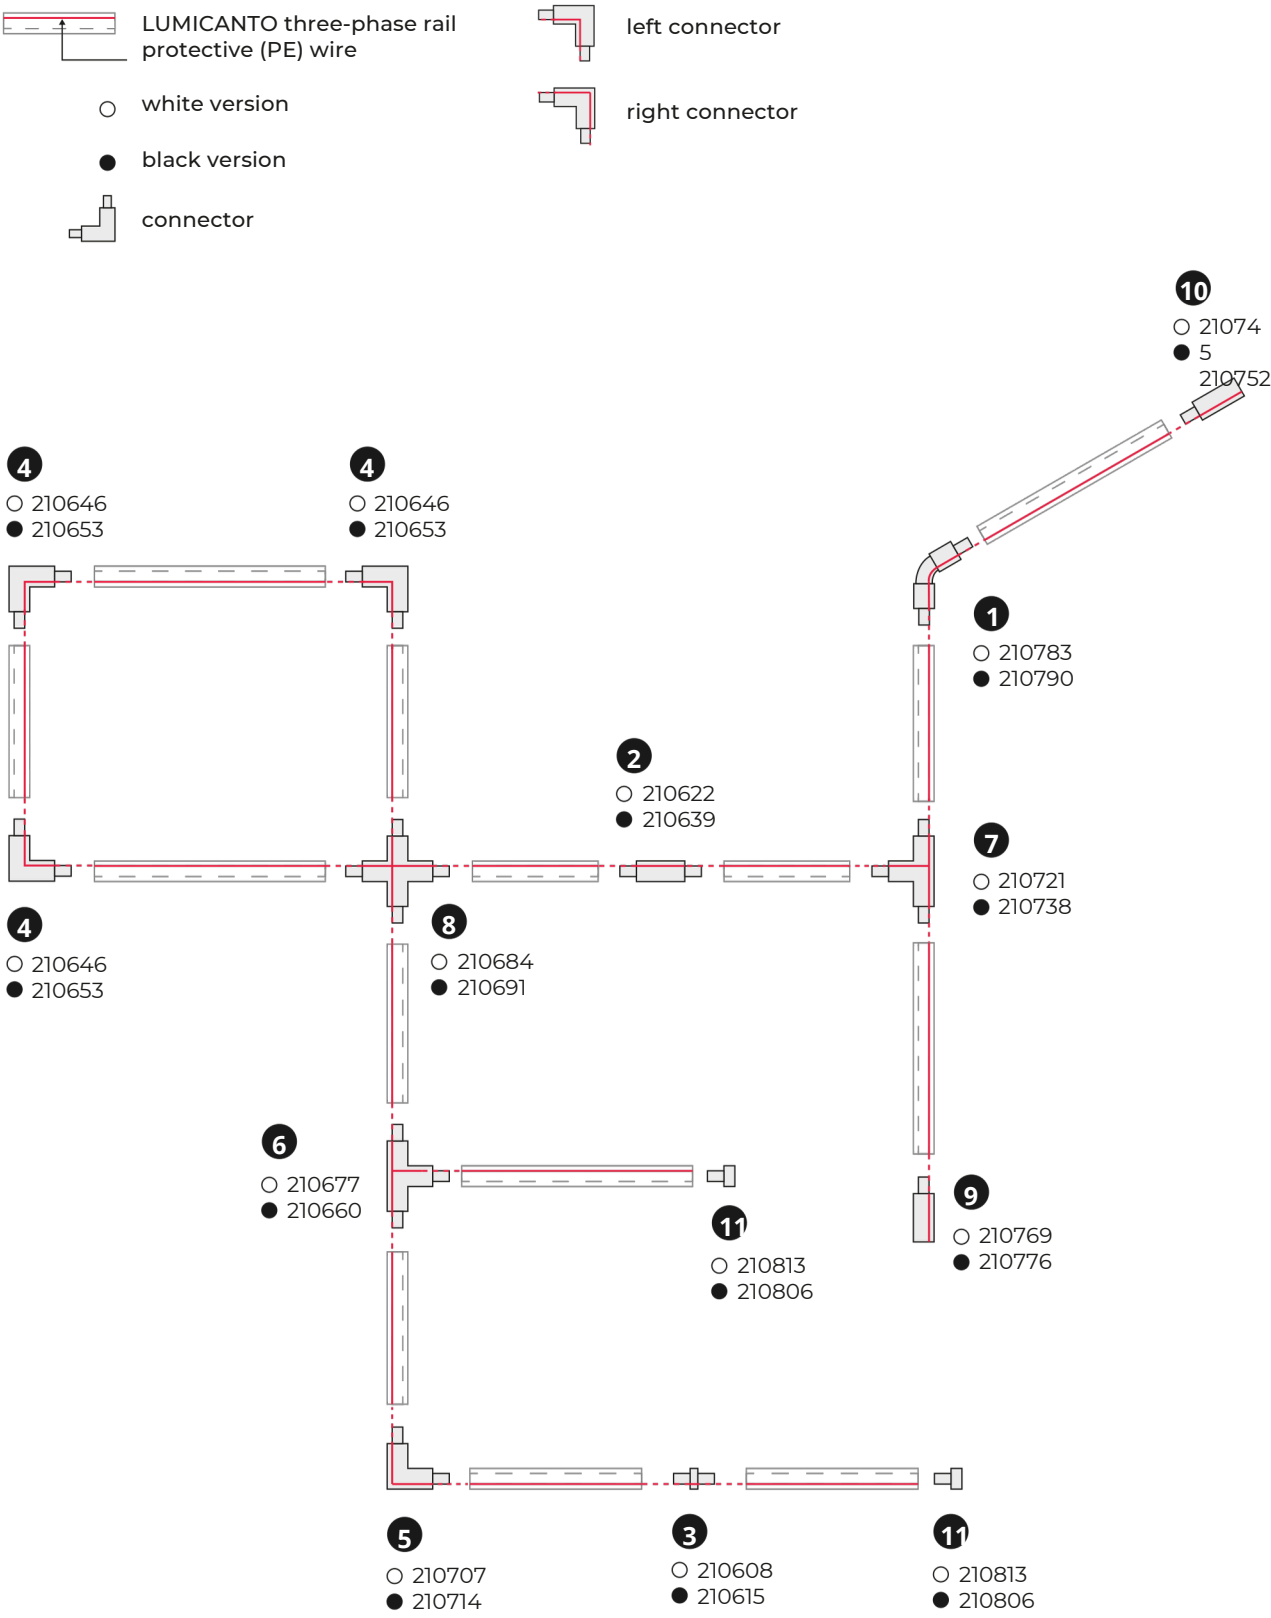

TRACK LIGHT
PIPE

3
WARRANTY

F

IP
20

IK
02

[View product page](#)

light direction adjustment
180° horizontal and
330° in own axis

surface or wall
mounting

aluminium

pendant
version



Track light PIPE for 1-phase rail

SYMBOL	LIGHT SOURCE	POWER [W]	COLOUR
475442	GU10	max 10	




PIPE surface mounted

478276	GU10	max 10	
478283	GU10	max 10	




PIPE pendant luminaire


478290	GU10	max 10	
478306	GU10	max 10	




DIMENSIONS [mm]



PIPE 1-PHASE RAIL
475442



PIPE SURFACE
478276 478283



PIPE PENDANT
478290 478306

LED line

06

LED STRIPS

COB
200

EXPERT
204

CLASSIC
206

WATERPROOF
212

ACCESSORIES
218

LED CONTROLLERS

REMOTE
224

VARIANTE
226

LED DRIVERS

WATERPROOF
228

MULTIPOWER
230

LED PROFILES

ALUMINIUM PROFILES
234



COB technology
smooth line of light

IP66
versions

high energy
efficiency

improved heat
dissipation

LED STRIP COB

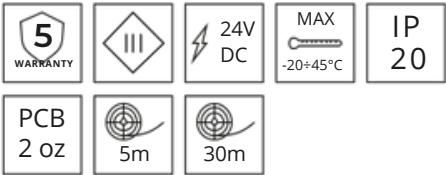

[View product page](#)

EFFICACY 80-100 lm/W

Power [W/m]:
5-18

Luminous flux [lm/m]:
500-1800

Beam angle [°]:
180

Colour temperature [K]:



Lifetime [h]:
L70B50 - 50.000


Strip colour:



LED Strip COB 24V white IP20

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
211032	5	3000	500	5	320	A C F
211049	5	4000	500	5	320	
211056	5	6500	500	5	320	
211094	5	3000	500	30	320	
211100	5	4000	500	30	320	
211117	5	6500	500	30	320	
476821	8	2700	800	5	320	A C F
210912	8	3000	800	5	320	
476838	8	4000	800	5	320	
476845	8	6500	800	5	320	
479754	8	2700	800	30	320	
210929	8	3000	800	30	320	
479761	8	4000	800	30	320	A C F
479778	8	6500	800	30	320	
479785	11	2700	1100	5	480	
210943	11	3000	1100	5	480	
479792	11	4000	1100	5	480	
479808	11	6500	1100	5	480	
200005	11	2700	1100	30	480	A C F
210950	11	3000	1100	30	480	
200012	11	4000	1100	30	480	
200029	11	6500	1100	30	480	

DIMENSIONS [mm]

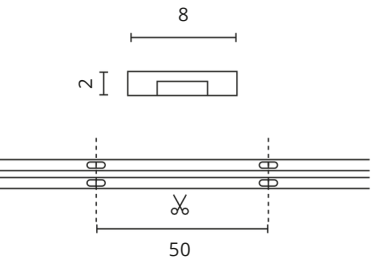

5W 211032 211049 211056 211094 211100 211117	8W 476821 210912 476838 476845 479754 210929 479761 479778	11W 479785 210943 479792 479808 200005 210950 200012 200029
---	---	--

LED Strip COB 24V white IP20

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX REEL [lm/m]	REEL [M]	LEDs [pcs/5m]	EEI
479846	14	2700	1400	5	528	
479853	14	4000	1400	5	528	
479860	14	6500	1400	5	528	
200036	14	2700	1400	30	528	
211001	14	3000	1400	30	528	
200043	14	4000	1400	30	528	
200050	14	6500	1400	30	528	
478245	18	2700	1800	5	480	
210974	18	3000	1800	5	480	
478269	18	4000	1800	5	480	
478313	18	6500	1800	5	480	
200098	18	2700	1800	30	480	
210998	18	3000	1800	30	480	
200104	18	4000	1800	30	480	


LED Strip 840 COB 24V RGBCCT IP20

200173	18	2700-6500	720	5	840
--------	----	-----------	-----	---	-----

LED Strip 576 COB 24V RGB IP20

SYMBOL	POWER [W/m]	COLOUR/WAVELENGTH [nm]	REEL [M]	LEDs [pcs/5m]
479907	10	RGB / 620, 520, 465	5	576

DIMENSIONS [mm]

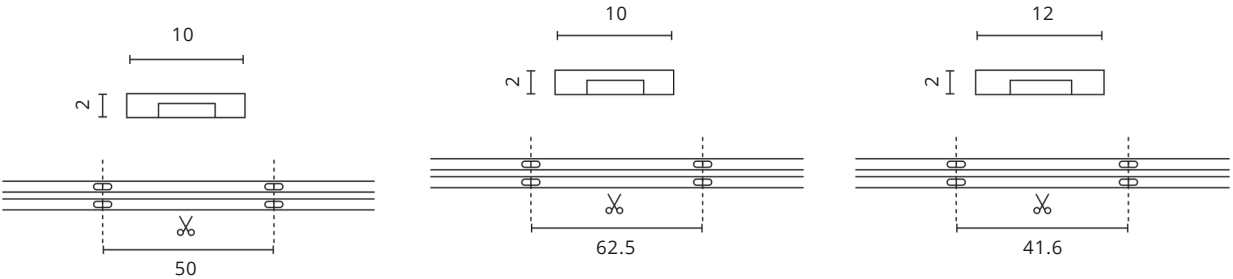

- 14W**
479846
479853
479860
200036
211001
200043
200050
- 18W**
478245
210974
478269
478313
200098
210998
200104

- 10W / RGB**
479907

- 18W / RGBCCT**
200173



various diode
densities

visible
light points

high
savings

dimmmable
versions

LED STRIP
EXPERT

5
WARRANTY

III

12
V
DC

24V
DC

MAX
-20÷45°C

IP
20

PCB
2 oz

5m

EFFICACY 77-160 lm/W
Power [W/m]:
6,5 - 17,5
Luminous flux [lm/m]:
740 - 2800
Beam angle [°]:
120
Colour temperature [K]:

27004000RGBCCT

Lifetime [h]:
L70B50 - 50.000

Strip colour:



LED Strip SMD2835 24V IP20 white high-lumen PCB 3 oz

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
479983	6,5	2700	1300	5	144	ABC B
479990	6,5	4000	1300	5	144	
479945	8,5	2700	1360	5	128	ABC D
479952	8,5	4000	1360	5	128	
479969	17,5	2700	2800	5	192	ABC D
479976	17,5	4000	2800	5	192	


LED Strip 300 SMD3528 MULTIwhite CCT IP20 9,6W

243714	9,6	3000 ÷ 6500	800	5	300	ABC G
241819	9,6	3000 ÷ 6500	800	5	300	


LED Strip 600 SMD2216 12V IP20 SLIM PCB 4 oz

249167	9,6	4000	740	5	600	ABC G
--------	-----	------	-----	---	-----	-----------------------------


DIMENSIONS [mm]

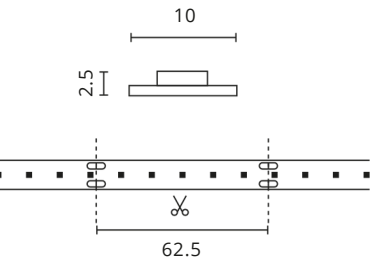


6,5/8,5W
479983
479990
479945
479952

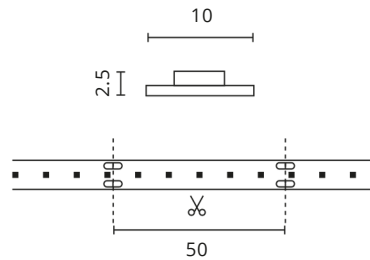


9,6W / CCT
243714
241819

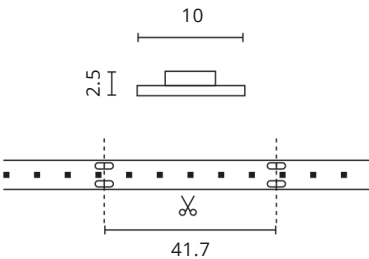

17,5W
479969
479976

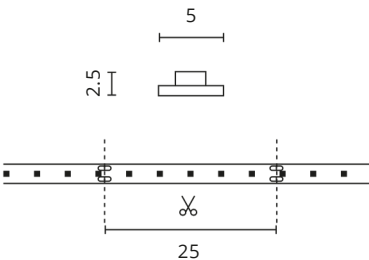

9,6W / SLIM
249167

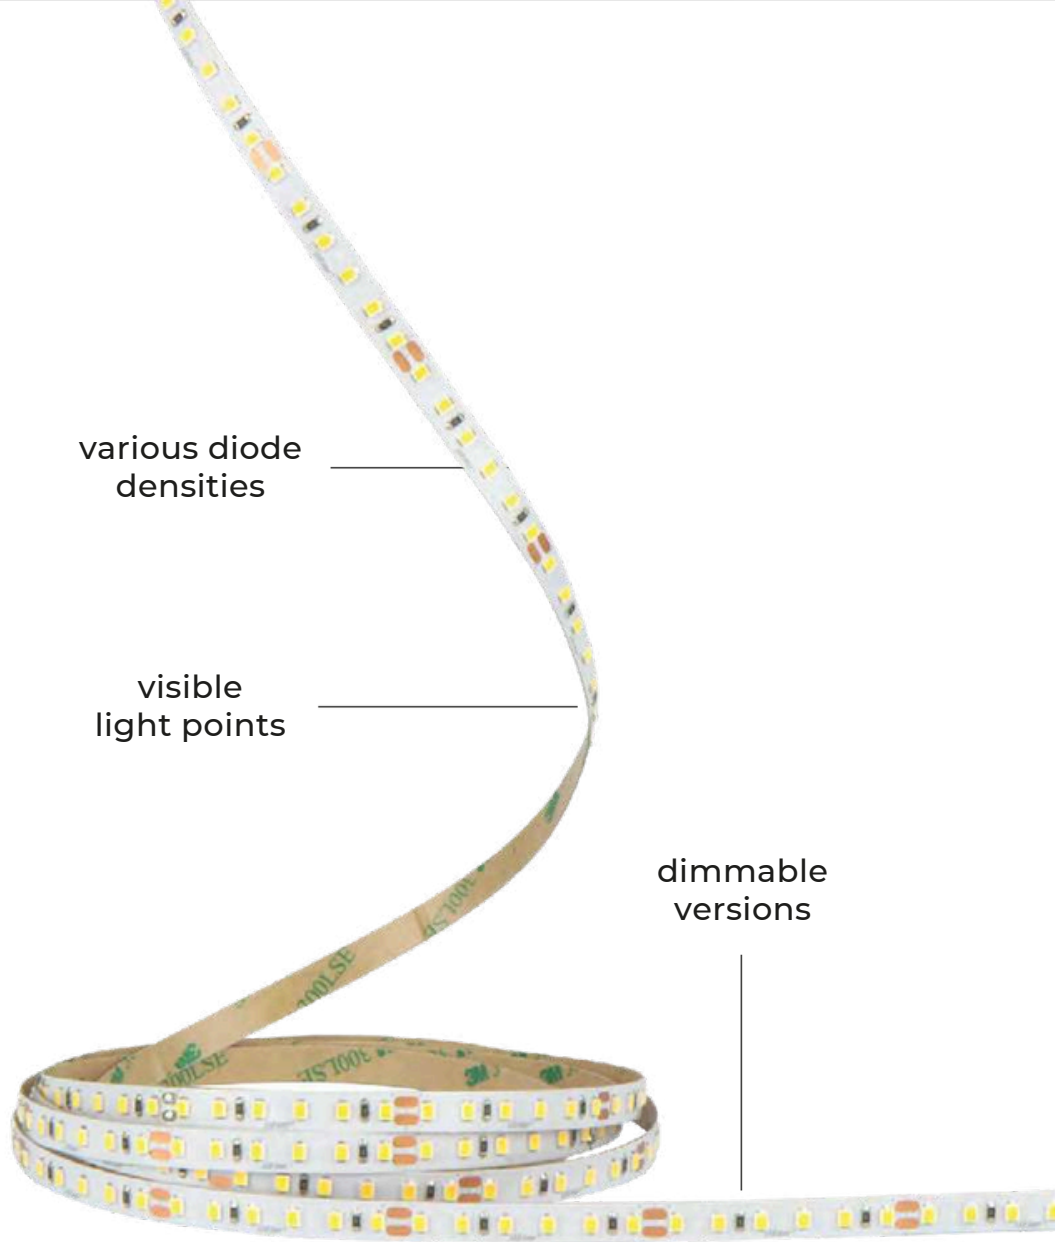

various diode
densities

visible
light points

dimmable
versions

EFFICACY 21-100 lm/W

Power [W/m]:
4,8-19,2

Luminous flux [lm/m]:
400 - 960

Beam angle [°]:
120

Colour temperature [K]:




Lifetime [h]:
L70B50 - 50.000

Strip colour:



LED STRIP
CLASSIC

24V
DC

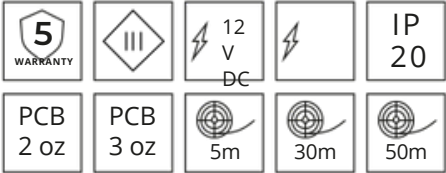

[View product page](#)


LED Strip 300 SMD3528 12V white IP20 12V DC

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
246463	4,8	2400	400	5	300	G
240164	4,8	3000	400	5	300	
249419	4,8	3000	400	30	300	F
477200	4,8	3000	400	50	300	G
245602	4,8	4000	400	5	300	
249426	4,8	4000	400	30	300	F
477194	4,8	4000	400	50	300	G
240188	4,8	6500	400	5	300	
249433	4,8	6500	400	30	300	F
477217	4,8	6500	400	50	300	G
240195	4,8	11000	400	5	300	
249440	4,8	11000	400	30	300	

LED Strip 300 SMD3528 24V white IP20 24V DC

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
240645	4,8	3000	400	5	300	G
241758	4,8	3000	400	30	300	
240652	4,8	4000	400	5	300	
241765	4,8	4000	400	30	300	
240676	4,8	4000	400	5	300	
241789	4,8	4000	400	30	300	
240690	4,8	4000	400	5	300	
241796	4,8	4000	400	30	300	

DIMENSIONS [mm]

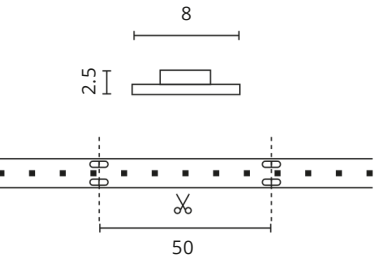

4,8W / 12V

246463	245602	249433	240645	240676
240164	249426	477217	241758	241 78 9
249419	477194	240195	240652	240690
477200	240188	249440	241 76 5	241796

4,8W / 24V

LED Strip 300 SMD3528 12V COLOUR IP20




SYMBOL	POWER [W/m]	COLOUR / WAVELENGHT	REEL [M]	LEDs [pcs/5m]
240201	4,8	RED / 620	5	300
240225	4,8	GREEN / 520	5	300
240218	4,8	BLUE / 465	5	300
240232	4,8	YELLOW / 590	5	300

LED Strip 600 SMD2835 12V white IP20




SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
477132	9,6	2700	960	5	600	
477262	9,6	2700	960	30	600	
477149	9,6	4000	960	5	600	
477279	9,6	4000	960	30	600	
477156	9,6	6500	960	5	600	
477118	9,6	11000	960	5	600	

DIMENSIONS [mm]

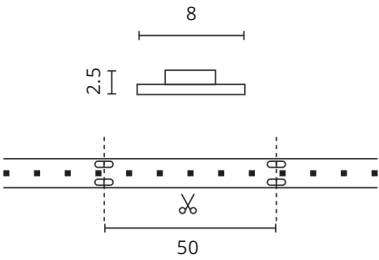

4,8W / 12V COLOUR

240201
240225
240218
240232

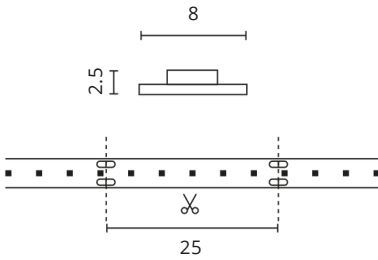

9,6W


477132 477279
477262 477156
477149 477118

LED Strip 150/300 SMD5050 RGB IP20



SYMBOL	POWER [W/m]	COLOUR / WAVELENGHT	REEL [M]	VO LTA G E [V DC]	LEDs [pcs/5m]
240140	7,2	RGB/ 620, 520, 465	5	12	150
240522	14,4	RGB/620, 520, 465	5	12	300
477255	14,4	RGB/620, 520, 465	30	12	300

LED Strip 300 SMD5050 RGBW IP20 12V DC PCB 3 oz




SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
247071	19,2	2700	400	5	300	
477231	19,2	2700	400	30	300	
477309	19,2	4000	400	5	300	
245657	19,2	6500	400	5	300	
477248	19,2	6500	400	30	300	

LED Strip 300 SMD5050 RGBW IP20 24V DC PCB 3 oz




241673	19,2	2700	400	5	300	
477316	19,2	4000	400	5	300	
241680	19,2	6500	400	5	300	

DIMENSIONS [mm]

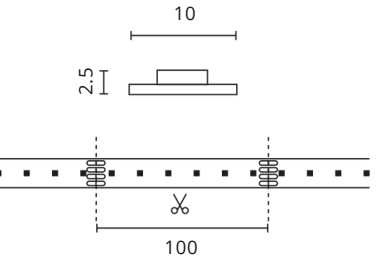

7,2W / 14,4W / RGB

240140
240522
477255

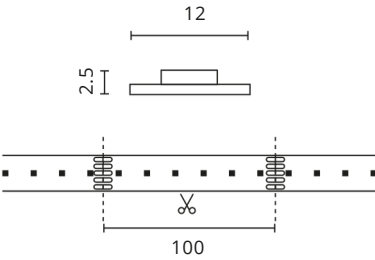

19,2W

247071 477248
477231 241673
477309 477316
245657 241680



protective
silicone coating

LED STRIP

WATERPROOF

5
WARRANTY

3
WARRANTY

MAX
-20+45°C

IP
65

IP
66

I
P
6
7

PCB
2 oz

COB

EFFICACY 100 lm/W

Power [W/m]:
5-14

Luminous flux [lm/m]:
500-1400

Beam angle [°]:
180

Colour temperature [K]:

2700

3000

4000

6500

Lifetime [h]:
L70B50 - 50.000

Strip colour:



SMD

EFFICACY 100 lm/W

Power [W/m]:
4,8 - 14,4

Luminous flux [lm/m]:
400 - 960

Beam angle [°]:
120

Colour temperature [K]:

3000

4000

6500

11000

Red

Green

Blue

RGB

Lifetime [h]:
L70B50 - 50.000

Strip colour:



LED Strip COB 24V white IP66

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEL
211063	5	3000	500	5	320	
211070	5	4000	500	5	320	
211087	5	6500	500	5	320	

479723	8	2700	800	5	320	
479730	8	4000	800	5	320	
479747	8	6500	800	5	320	


479815	11	2700	1100	5	480	
210981	11	3000	1100	5	480	
479822	11	4000	1100	5	480	
479839	11	6000	1100	5	480	

479877	14	2700	1400	5	528	
479884	14	4000	1400	5	528	
479891	14	6000	1400	5	528	


LED Strip 576 COB 24V RGB IP66

SYMBOL	POWER [W/m]	COLOUR/WAVELENGTH [nm]	REEL [M]	LEDs [pcs/5m]
479914	10	RGB / 620, 520, 465	5	576


DIMENSIONS [mm]

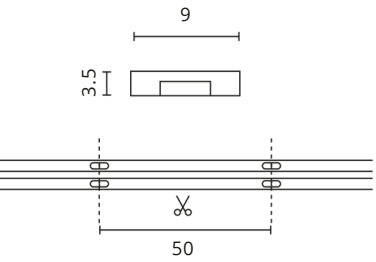


5W
211063
211070
211087

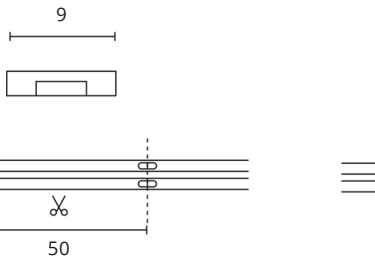


8W
479723
479730
479747

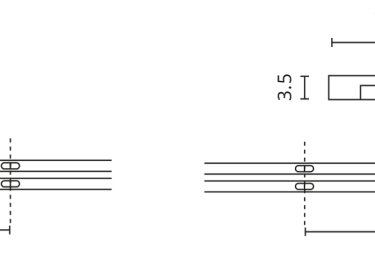

11W
479815
210981
479822
479839

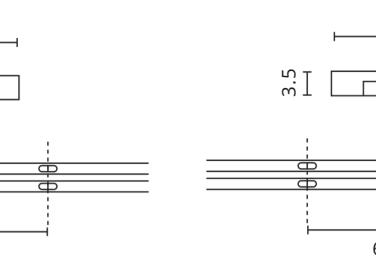

14W
479877
479884
479891



10W / RGB IP66
479914

LED Strip 300 SMD2835 12V DC white IP65

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEI
240249	4,8	3000	400	5	300	A T G G
245619	4,8	4000	400	5	300	
240256	4,8	6500	400	5	300	
240263	4,8	11000	400	5	300	


LED Strip 300 SMD3528 24V DC white IP65

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEI
240713	4,8	3000	400	5	300	A T G G
240720	4,8	4000	400	5	300	
240744	4,8	6500	400	5	300	
241147	4,8	11000	400	5	300	


LED Strip 300 SMD3528 12V white IP67

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEI
241468	4,8	3000	400	5	300	A T G G
245626	4,8	4000	400	5	300	


DIMENSIONS [mm]



4,8W / 12V / IP65
240249 245619
240256 240263



4,8W / 24V / IP65
240713 240720
240744 241147



4,8W / 12V / IP67
241468
245626

LED Strip 300 SMD3528 12V COLOUR IP65

SYMBOL	POWER [W/m]	COLOUR / WAVELENGTH	LUMINOUS FLUX [lm/m]	REEL [M]	VOLTAGE [V DC]	LEDs [pcs/5m]
240294	4,8	GREEN / 520	400	5	12	300


LED Strip 600 SMD2835 12V white IP65

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm/m]	REEL [M]	LEDs [pcs/5m]	EEI
471345	9,6	2700	960	5	600	A T G G
477040	9,6	4000	960	5	600	
477057	9,6	6500	960	5	600	


LED Strip 300 SMD5050 RGB IP65

SYMBOL	POWER [W/m]	COLOUR TEMPERATURE [K]	REEL [M]	VOLTAGE [V DC]	LEDs [pcs/5m]
240157	7,2	RGB/620, 520, 465	5	12	150
240614	14,4	RGB/620, 520, 465	5	12	150
241741	14,4	RGB/620nm, 520, 465	5	12	300


DIMENSIONS [mm]



4,8W / COLOUR / IP65
240294



9,6W / IP65
471345
477040
477057



RGB IP65
240157
240614
241741






LED STRIP
ACCESSORIES




[View product page](#)

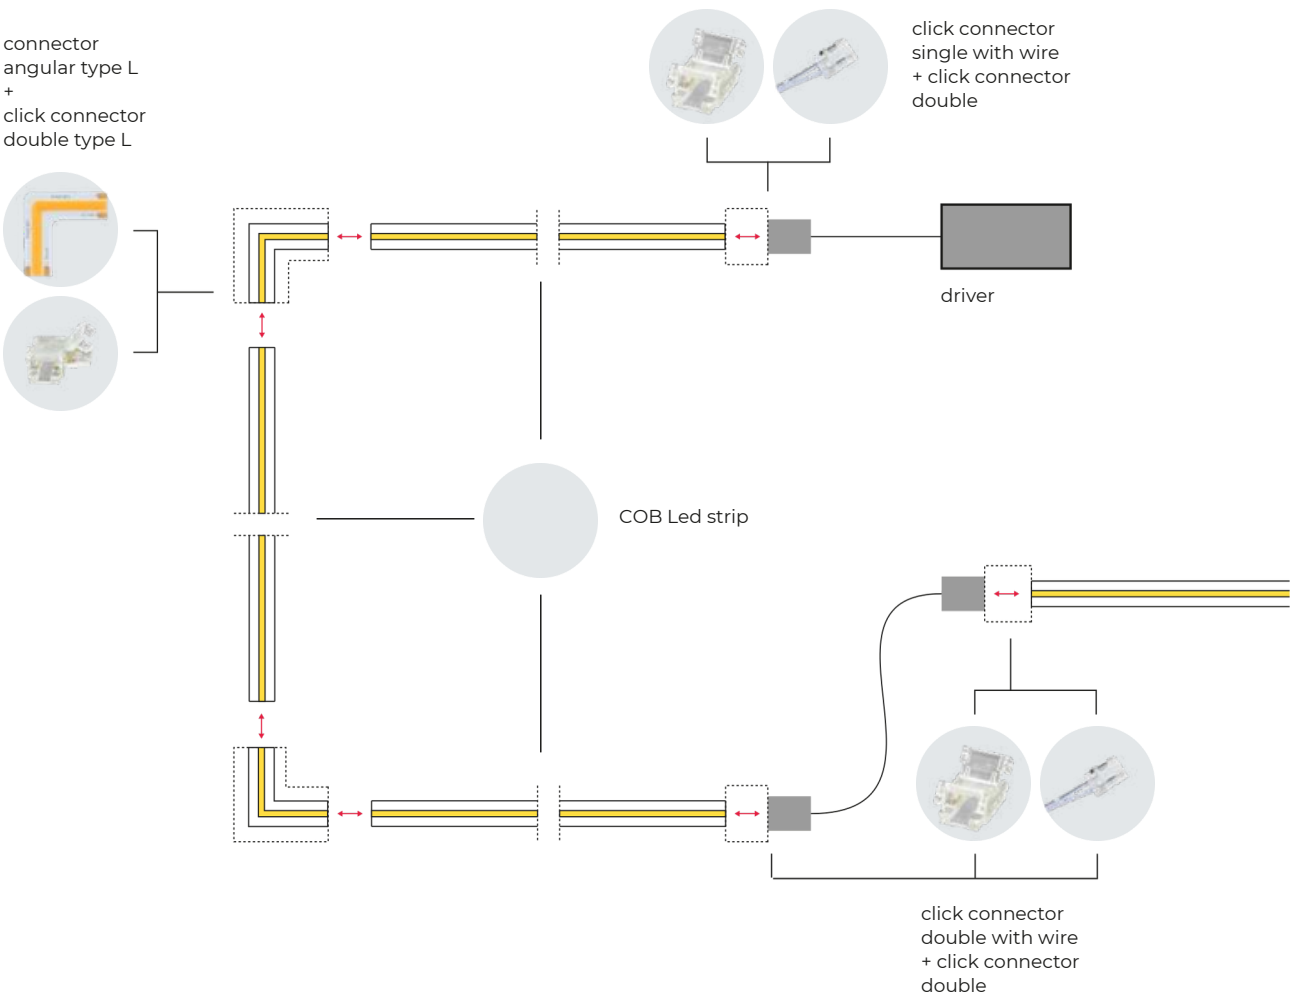

**Flexible connections
for COB LED Strips**

COB LED strips can be easily connected using L, T, and type+ connectors, allowing for the creation of various lighting designs and effects. These connectors enable seamless corner, branch, and cross connections, making it simple to customise illuminations. Depending on the setup, both 2-pin and 4-pin connectors are available to support different wiring configurations.

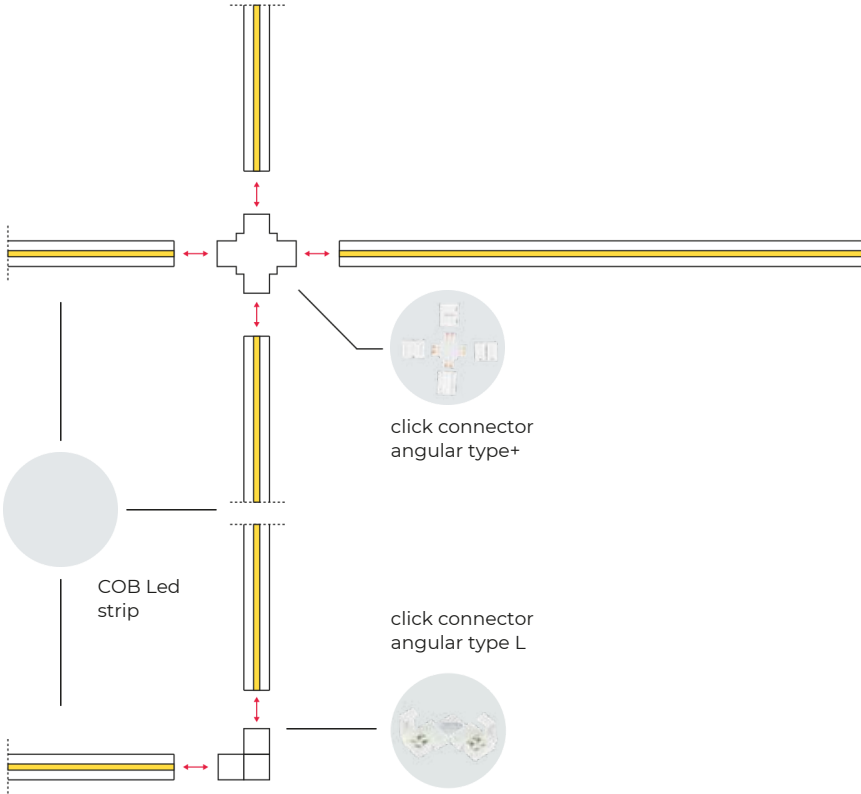

COB strip CLICK CONNECTOR single with wire 10 mm 2 PIN



SYMBOL	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH [mm]	LED
478351	2PIN	single + wire	10	COB

COB strip CLICK CONNECTOR double with a wire 10 mm 2 PIN




SYMBOL	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH [mm]	LED
478368	2PIN	double + wire	10	COB

COB strip CLICK CONNECTOR single with wire 8 mm 2 PIN




SYMBOL	TYPE	TYPE OF CONNECTOR	LED STRIP WIDTH [mm]	LED
202481	2PIN	single + wire	8	COB


DIMENSIONS [mm]



single 2PIN / 10mm
478351



double 2PIN / 10mm
478351




single 2PIN / 8mm
478351

COB LED Strip connector angular 2 PIN Type L




SYMBOL	FOR STRIP [W]	TYPE	LED STRIP WIDTH [mm]	COLOUR TEMPERATURE [K]	LED
200456	8	2PIN	8	2700	COB
200463	8	2PIN	8	4000	COB
200470	8	2PIN	8	6500	COB
200487	11	2PIN	8	2700	COB
200494	11	2PIN	8	4000	COB
200500	11	2PIN	8	6500	COB
200517	14	2PIN	10	2700	COB
200524	14	2PIN	10	4000	COB
200531	14	2PIN	10	6500	COB

COB LED Strip CLICK CONNECTOR angular 2 PIN Type L




SYMBOL	FOR STRIP [W]	TYPE	LED STRIP WIDTH [mm]	COLOUR TEMPERATURE [K]	LED
478412	18	2PIN	10	2700	COB
478429	18	2PIN	10	4000	COB
478436	18	2PIN	10	6500	COB

DIMENSIONS [mm]



2PIN CONNECTOR
200456 200500
200463 200517
200470 200524
200487 200531
200494



2PIN CLICK CONNECTOR
478412
478429
478436

COB Strip CLICK CONNECTOR double 2 PIN

SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
200609	2PIN	8	COB
200616	2PIN	10	COB

COB Strip CLICK CONNECTOR double 2 PIN type L

SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
200548	2PIN	8	COB
200555	2PIN	10	COB

COB RGB Strip CLICK CONNECTOR double 10mm 4 PIN


SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
200623	4PIN	10	COB

COB Strip CLICK CONNECTOR angular Type T


SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
246524	4PIN	10	RGB




DIMENSIONS [mm]




2PIN DOUBLE
200609
200616



2PIN TYPE L
200548
200555



4PIN RGB DOUBLE
200623



4PIN TYPE T
246524



COB Strip CLICK CONNECTOR angular Type L

SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
246517	4PIN	10	RGB

COB Strip CLICK CONNECTOR angular Type +

SYMBOL	TYPE	LED STRIP WIDTH [mm]	LED
246548	2PIN	8	WHITE/COLOUR
246531	4PIN	10	RGB
247859	5PIN	12	RGBW


Strip mounting clip

SYMBOL	LED STRIP WIDTH [mm]	LED
200586	8	COB
200593	10	COB


Strip mounting bracket

SYMBOL	LED STRIP WIDTH [mm]	LED
200562	8	SMD, COB
200579	10	SMD, COB


DIMENSIONS [mm]




TYPE L
246517




TYPE +
246548
246531
247859



CLIP
200586
200593



BRACKET
200562
200579

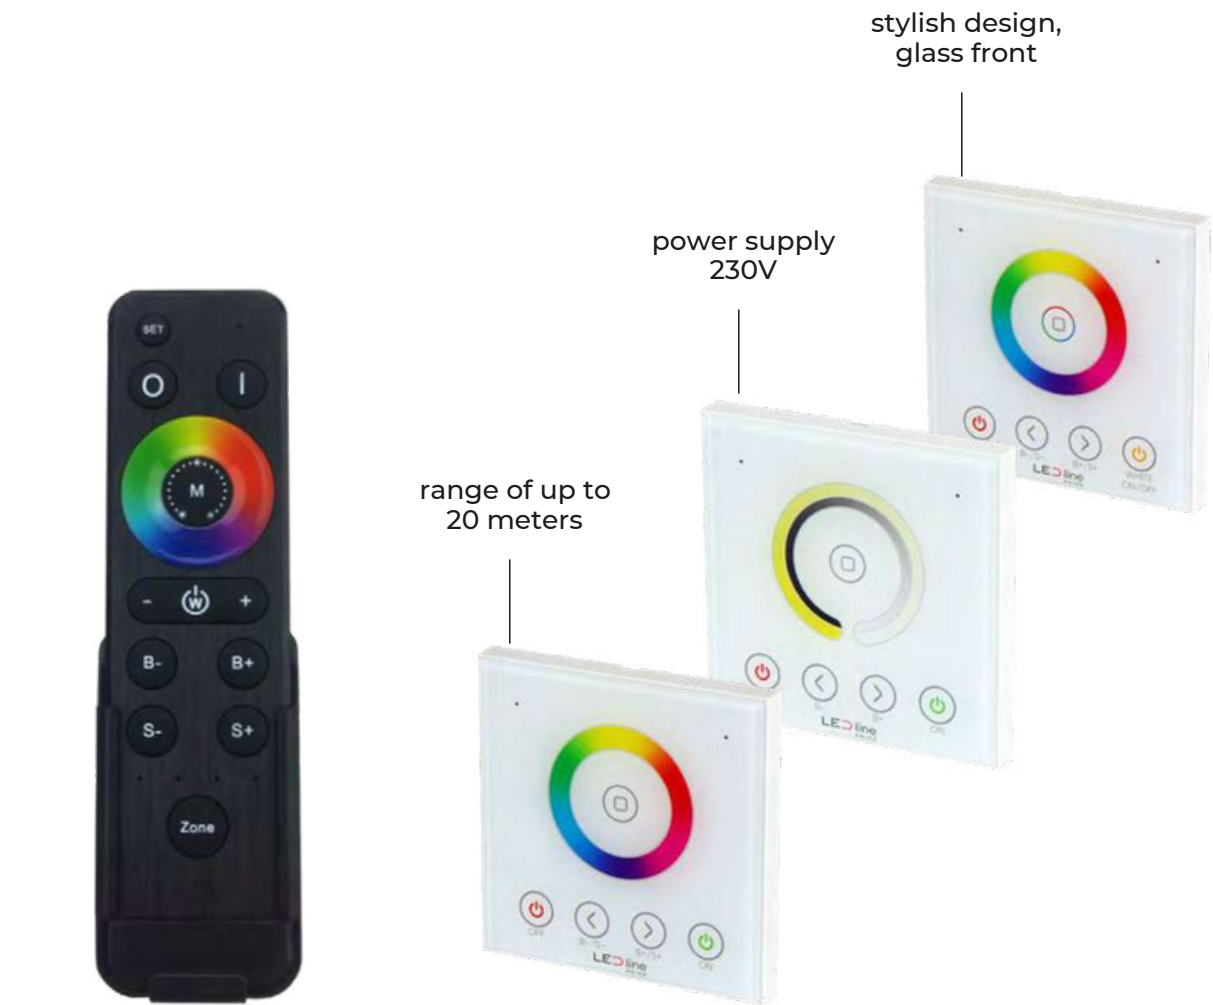

LED CONTROLLER
REMOTE

5
WARRANTY

MAX
-20+60°C

tuya

[View product page](#)



VARIANTE LED Remote Controller

SYMBOL	POWER SUPPLY	RF DISTANCE	COMMUNICATION	FUNCTION
471321	DC 3V 2*AAA	20M	RF 2,4GHz	DIM/CCT
471338	DC 3V 2*AAA	20M	RF 2,4GHz	RGB/RGBW

VARIANTE LED Remote Controller DIM/CCT MAG JOY

476937	DC 3V 2*AAA	30M	RF 2,4GHz	DIM/CCT
--------	-------------	-----	-----------	---------

VARIANTE LED Wall Remote Controller

201200	90-265VAC	20M	RF 2,4GHz	DIM/CCT
201217	90-265VAC	20M	RF 2,4GHz	RGB
201224	DC 3V 2*AAA	20M	RF 2,4GHz	RGBW/RGBCCT

Remote for a LED WIFI TUYA VARIANTE DIM/CCT/1-10V controller

203600	DC 3V 2*AAA	20M	RF 2,4GHz	RGBW/RGBCCT
--------	-------------	-----	-----------	-------------

DIMENSIONS [mm]

40

21

148

REMOTE CONTROLLER
471321
471338

60

35

MAG JOY
476937

86

34

86


WALL REMOTE CONTROLLER
201200
201217
201224

19


19

138

REMOTE FOR LED WIFI TUYA
203600

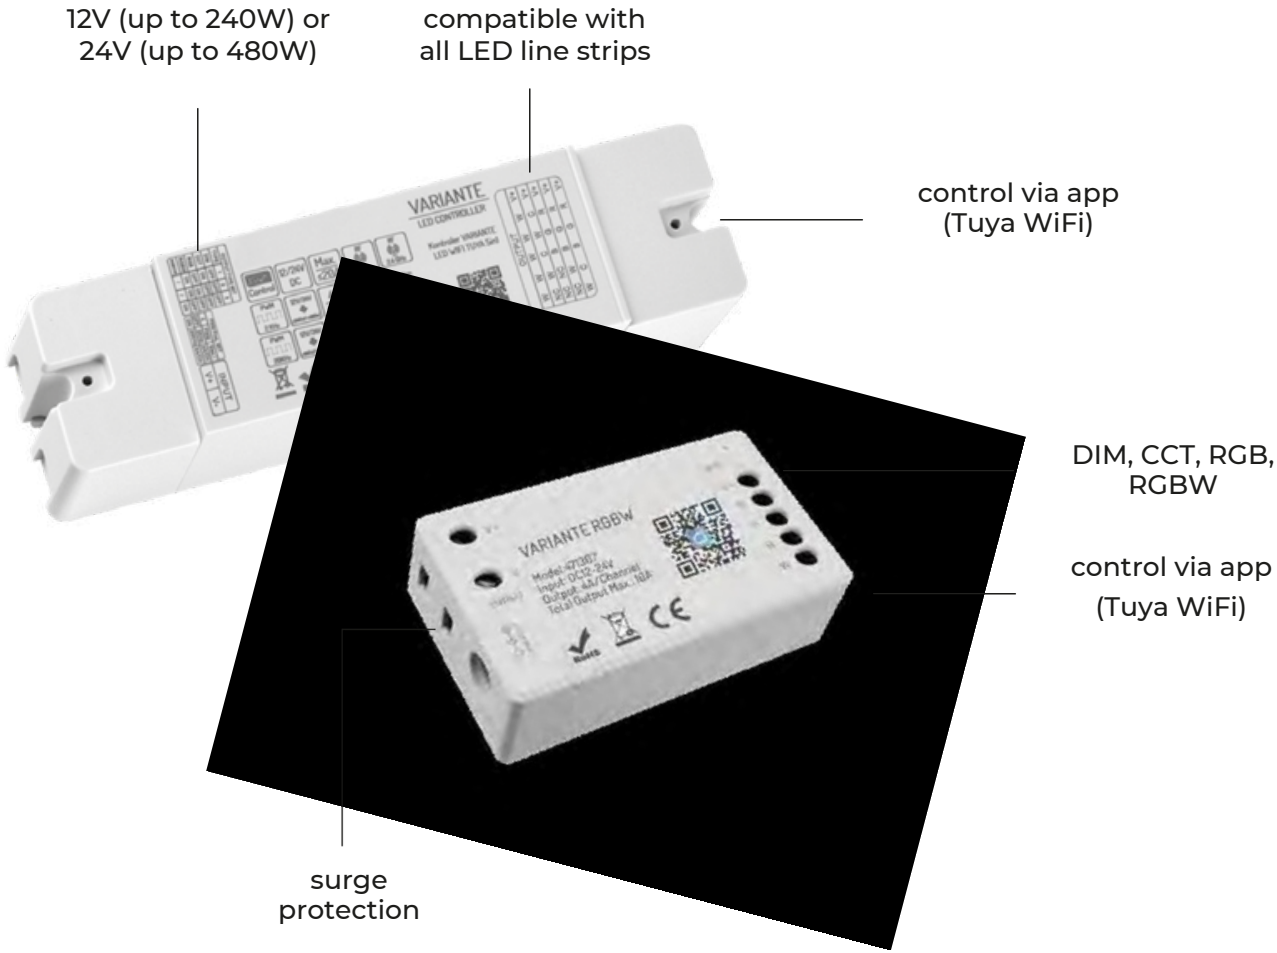

LED CONTROLLER
VARIANTE



VARIANTE LED Controller 5in1

SYMBOL	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
477781	12-24V	20A (4A/channel)	RF 2,4GHz / WIFI	DIM/CCT/RGB/ RGBW/RGBCCT



VARIANTE LED Controller SPI DIGITAL RGB

SYMBOL	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
201286	12-24V	2048px	RF 2,4GHz	SPI DIGITAL



VARIANTE LED Controller


SYMBOL	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471277	12-	16A	RF 2,4GHz / WIFI	DIM
47128	24V	(4A/channel)	RF 2,4GHz / WIFI	CCT
4	12-	16A	RF 2,4GHz / WIFI	RGB
471291	24V	(4A/channel) 15A	RF 2,4GHz / WIFI	RGBW
471307	12-	(5A/channel) 16A	RF 2,4GHz / WIFI	RGBCCT
201231	24V	(4A/channel) 15A		




VARIANTE LED Controller RGB/RGBW + remote controller

SYMBOL	POWER SUPPLY	MAX. OUTPUT	COMMUNICATION	FUNCTION
471314	12-24V	16A (4A/channel RGBW, 5A/channel RGB)	RF 433,92Mhz	RGB/RGBW

DIMENSIONS [mm]



CONTROLLER 5in1
/ SPI DIGITAL
477781 201286



CONTROLLER
471277
471284
471291
471307
471314



IP67
protection

EMC 55015
compliant

full range of
12-24V models

LED DRIVER
WATERPROOF

5
WARRANTY

MAX
-30÷+70°C

PF
0,95


I
P
6
7

View product page

Power supply IP67

SYMBOL	POWER	VOLTAGE	IP CLASS
LL-12-12	12W	12V	IP67
L L-1 2-24	12W	24V	IP67
LL-20-12	20W	12V	IP67
LL-20-24	20W	24V	IP67
L L-35 -1 2	36W	12V	IP67
L L-35 -24	36W	24V	IP67
LL-50-12	50W	12V	IP67
LL-50-24	50W	24V	IP67
LL-60-12	60W	12V	IP67
LL-60-24	60W	24V	IP67
L L-75 -1 2	75W	12V	IP67
L L-75 -24	75W	24V	IP67
LL-100-12	100W	12V	IP67
LL-100-24	100W	24V	IP67
LL-150-12	150W	12V	IP67
LL-150-24	150W	24V	IP67
LL-200-12	200W	12V	IP67
LL-200-24	200W	24V	IP67

DIMENSIONS [mm]

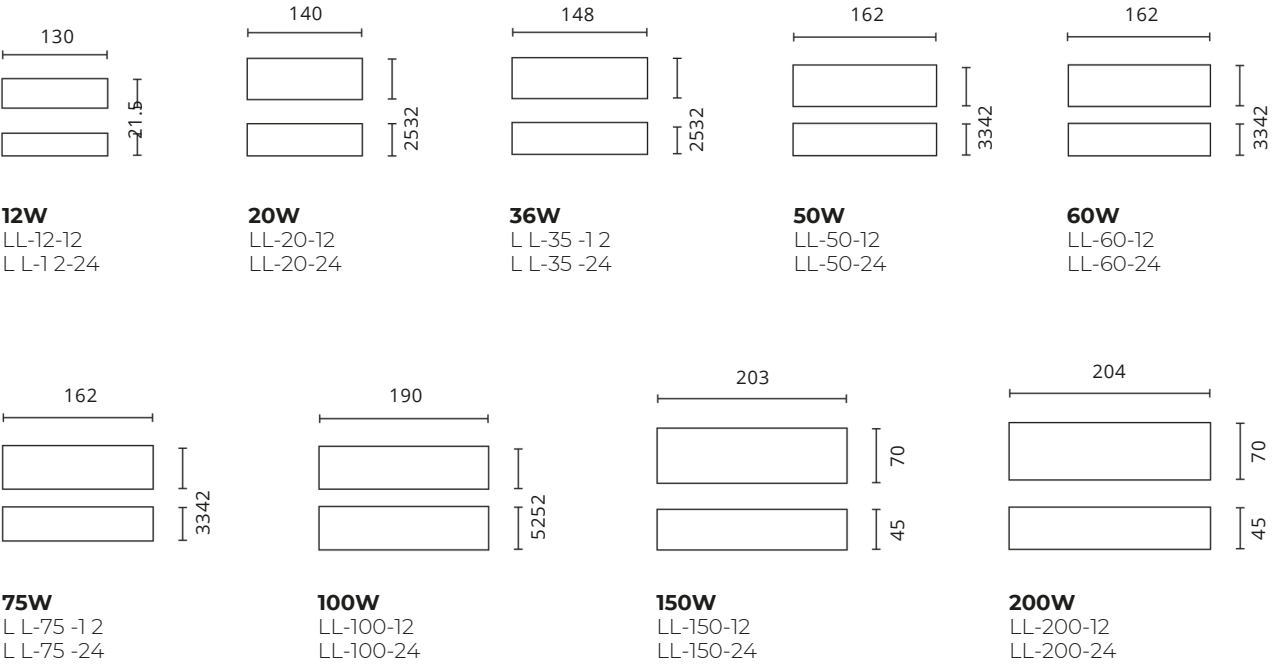

hand motion sensor
with 1,5m wire



motion sensor
with 1,5m wire




touch smooth
dimming sensor
with 1,5m wire



plug&play
system

slim shape,
easy installation

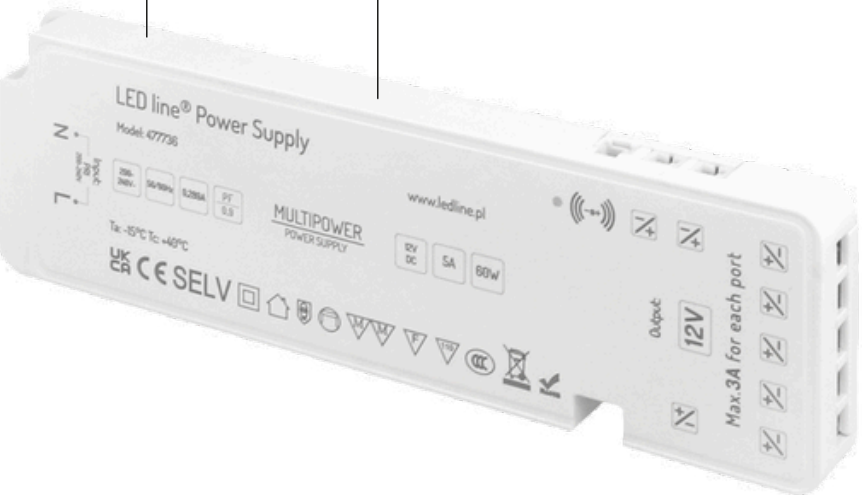

output channels
for sensors


LED DRIVER
MULTIPOWER



[View product page](#)

MULTIPOWER CONNECTION

The power supply enables independent or group control of multiple LED strip sections, depending on the installation requirements. Each output channel can be controlled by a separate sensor, while all channels can also be controlled simultaneously via a single sensor connected to the Master channel. Sensors are integrated with cables and connect directly to the power supply outputs and LED light sources. The system also allows combined configurations – for example, a Master sensor working in coordination with sensors on individual channels. No additional control wiring is required for installation.

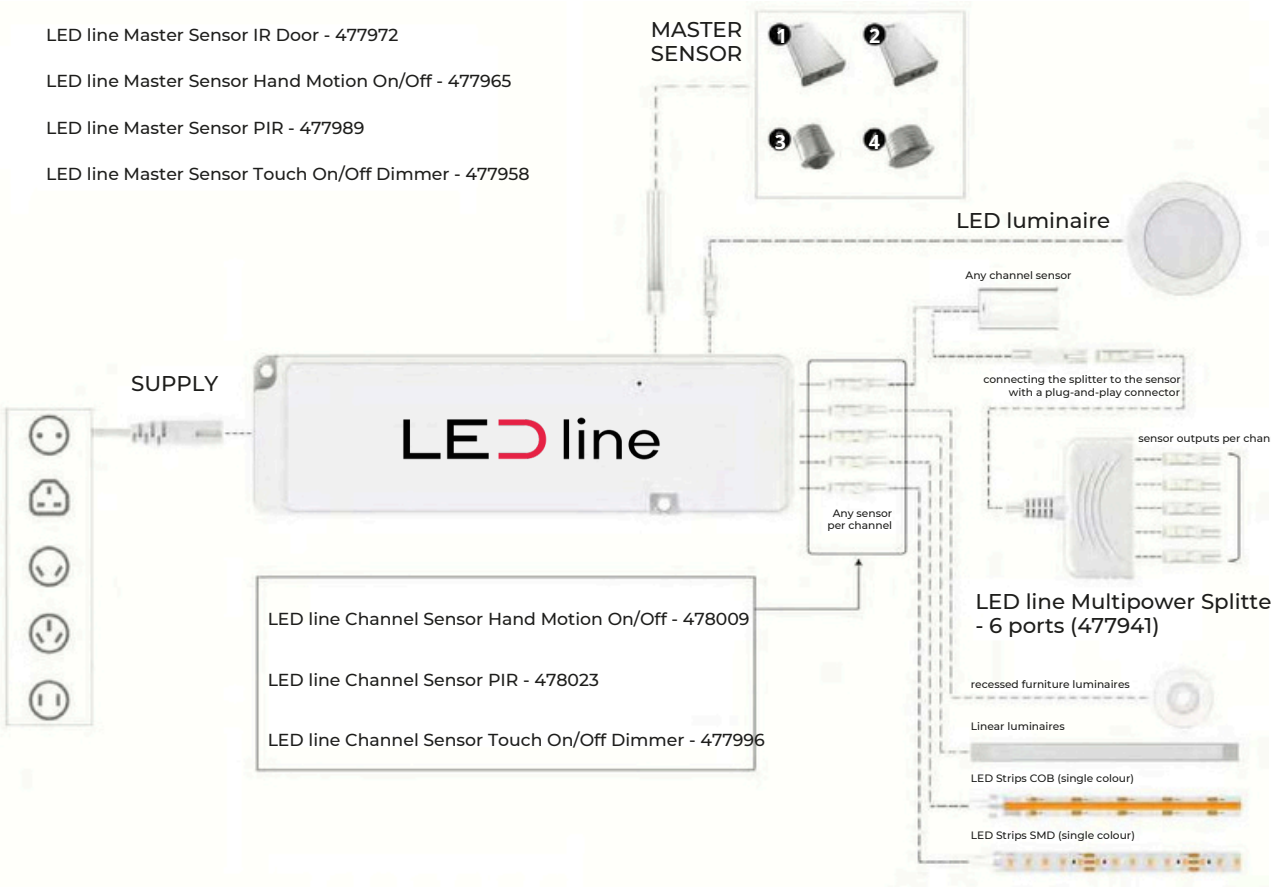


LED Multipower sensor



SYMBOL	SENSOR TYPE
477965	Master Sensor Hand Motion PROXIMITY
478009	Channel Sensor Hand Motion PROXIMITY
477972	Master Sensor IR Door




477989	Master Sensor PIR
478023	Channel Sensor PIR




477958	Master Sensor Touch ON/OFF Dimmer
477996	Channel Sensor Touch ON/OFF Dimmer


DIMENSIONS [mm]

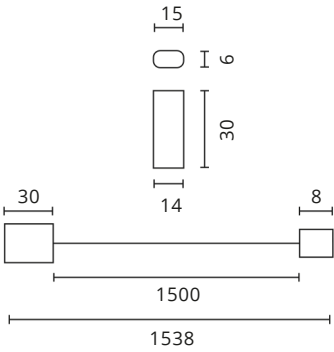

HAND MOTION / DOOR
477965
478009
477972



PIR
47798
9
47802
3



TOUCH DIMMER
477958 477996

LED Multipower driver 12V



SYMBOL	POWER	VOLTAGE	IP CLASS
477736	60W	12V	IP20
477743	100W	12V	IP20

LED Multipower wire




SYMBOL	TYPE
477934	wire 2m
477927	extension wire 2m

LED Multipower splitter




SYMBOL	TYPE
477941	6 ports


DIMENSIONS [mm]




MULTIPOWDER DRIVER 12V / 60W
477736




WIRE
47793
4
477927

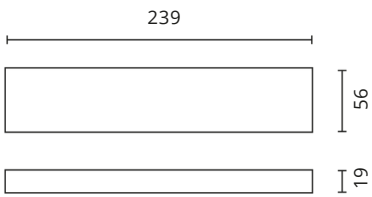

MULTIPOWDER DRIVER 12V / 100W
477743



LED MULTIPOWDER SPLITTER
477958 477996

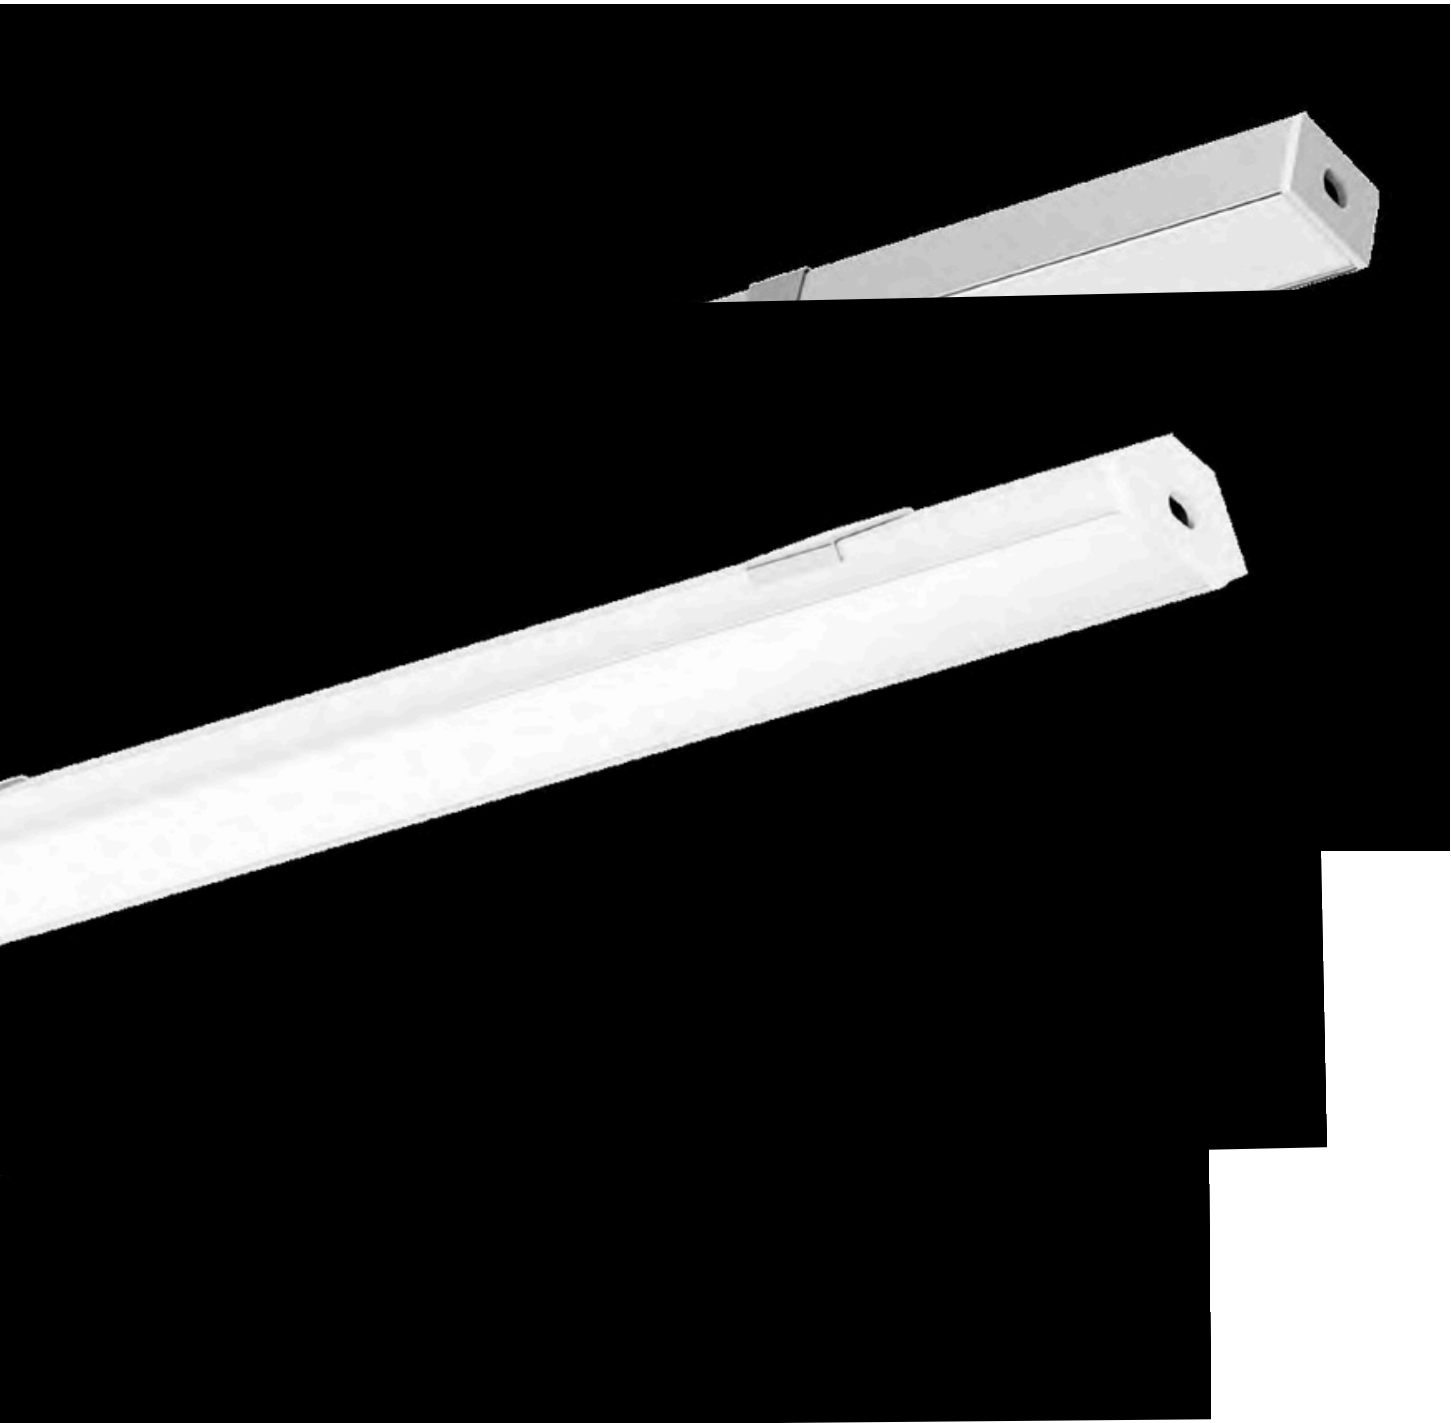


LED PROFILE

ALUMINIUM PROFILES

IP
20


- Length [mm]:
2000
- Installation:
surface, corner, recessed
- Housing:
aluminium
-

View product page



LED Surface Profile set

SYMBOL	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203617	2000 mm	9,5 mm	16 mm	surface	silver anodized
203624	2000 mm	9,5 mm	16 mm	surface	white
203631	2000 mm	9,5 mm	16 mm	surface	black



LED Corner Profile set


SYMBOL	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203648	2000 mm	16,6mm	16,6mm	corner	silver anodized
203655	2000 mm	16,6mm	16,6mm	corner	white
203662	2000 mm	16,6mm	16,6mm	corner	black




LED Recessed Profile set

SYMBOL	LENGHT	HIGH	WIDE	MOUNTING TYPE	COLOUR
203679	2000 mm	9,5 mm	16 mm	recessed	silver anodized
203686	2000 mm	9,5 mm	16 mm	recessed	white
203693	2000 mm	9,5 mm	16 mm	recessed	black


DIMENSIONS [mm]



SURFACE
203617
203624
203631



CORNER
203648
203655
203662



RECESSED
203679
203686
203693

LED line

07

LED LIGHT SOURCES

CERAMIC
238

BASIC
252

GLASS
244

T8 LED
256

FILAMENT
248



ACCESSORIES
258

LED MODULES

EXPERT
262



LED LIGHT SOURCE
CERAMIC



EFFICACY 130-142 lm/W
Power [W]:
3-10

Luminous flux [lm]:
330-1400
Beam angle [°]:
38-270
Colour temperature [K]:



Lifetime [h]:
L70B50 - 30.000
Type:
E27, E14, GU10, GU11,
MR16, MR 11
Housing:
ceramic

LED light source CERAMIC E14 230V C37




SYMBOL		POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
201606		5	220	2700	700	A G D
209640	New	5	o	3000	700	
201613		5	220	4000	700	
201620		5	o	6500	700	
			220			
247576-II		7	220	2700	1000	A G D
209664	New	7	220	3000	1000	
247583-II		7	220	4000	1000	
201651		7	o	6500	1000	
			220			
248610-II		9	220	2700	1260	A G D
209671	New	9	220	3000	1260	
248627-II		9	220	4000	1260	
201682		9	o	6500	1260	

LED light source CERAMIC E14 9W 230V C37 DIMMABLE




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
470232-II	9	220	2700	117	ATTENTION
209688	New 9	o	3000	0	
470249-II	9	220	4000	117	
		o			
		220		117	
		o		0	


DIMENSIONS [mm]



E14 / CANDLE / 5W
201606
201613
201620



E14 / CANDLE / 7W
247576 - I I 247583-
II 201651



E14 / CANDLE / 7W
248610-II
248627-II
201682
470232-II
470249-II

LED light source CERAMIC E14 7W 230V G45



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
201729	7	220°	2700	1000	A A G D
209657	New7	220°	3000	1000	
201736	7	220°	4000	1000	
201743	7	220°	6500	1000	

LED light source CERAMIC E27 7W 230V G45




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
247590-II	7	220°	2700	1000	A A G D
209695	New7	220°	3000	1000	
247606-II	7	220°	4000	1000	
201774	7	220°	6500	1000	

LED light source CERAMIC E27 230V A60




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
201781	6	280°	2700	840	A A G D
201798	6	280°	4000	840	
201804	6	280°	6500	840	
241734-II	10	280°	2700	1820	A A G G
241772-II	10	280°	4000	1820	

DIMENSIONS [mm]



E14
201729
201736
201743

DIMENSIONS [mm]



E27
201729
201736
201743

LED light source CERAMIC GU10 230V



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
201453	5	120°	2700	700	A A G D
201460	5	120°	4000	700	
201477	5	120°	6500	700	
247613-II	7	120°	2700	1000	A A G D
209626	New7	120°	3000	1000	
247620-II	7	120°	4000	1000	


470218-II	10	120°	2700	1250	A A G D
470225-II	10	120°	4000	1250	
248580-II	10	120°	2700	1400	
209633	New10	120°	3000	1400	
248597-II	10	120°	4000	1400	
248603-II	10	120°	6500	1400	

LED light source CERAMIC GU11 3W 230V




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
248108-II	3	38°	2700	330	A A G D
248122-II	3	38°	4000	330	
248115-II	3	38°	6500	330	

DIMENSIONS [mm]



GU11
201453
201460
201477
247613-II
247620-II

DIMENSIONS [mm]



GU11
248108-II
248122-II
248115-II

LED light source CERAMIC MR16 AC/DC

SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
248139-II	3	38°	2700	330	A G F
248146-II	3	38°	4000	330	
248153-II	3	38°	6500	330	
201903	5	120	2700	600	A G E
201910	5	o	4000	600	
201927	5	120	6500	600	
201934	8,5	120	2700	1020	A G E
201941	8,5	o	4000	1020	
201958	8,5	120	6500	1020	
		o			
		120			
		o			

LED light source CERAMIC SMD 5W

SYMBOL	BEAM ANGLE	COLOUR TEMPERATURE [K]	DIM (TRIAC)	EEI
247286	5	110	2700	A G G
470720	5	o	2700	
247293	5	110	4000	
470737	5	o	4000	
470560	5	110	6500	
470744	5	o	6500	
		110		
		o		
		110		
		o		
		110		
		o		

DIMENSIONS [mm]




MR16 AC/DC
248139-II 201927
248146-II 201934
248153-II 201941
201903 201958
201910

SMD / 5W
247286 470737
470720 470560
247293 470744

LED light source CERAMIC G9 230V

SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
245480	4	270	2700	350	A G E
209572 New	4	o	3000	350	
245534	4	270	4000	350	
245541	4	o	6000	350	
		270			
		o			
		270			
245947	6	270	2700	550	A G F
209589 New	6	o	3000	550	
245954	6	270	4000	550	
245961	6	o	6000	550	
		270			
		o			
		270			
247903	8	270	2700	75	A G F
209596 New	8	o	3000	0	
247910	8	270	4000	75	
247927	8	o	6000	0	
		270		75	
		o		0	
		270		75	
248900	12	270	2700	1160	A G F
209602 New	12	o	3000	1160	
248917	12	270	4000	1160	
248924	12	o	6000	1160	
		270			
		o			
		270			
		o			

DIMENSIONS [mm]

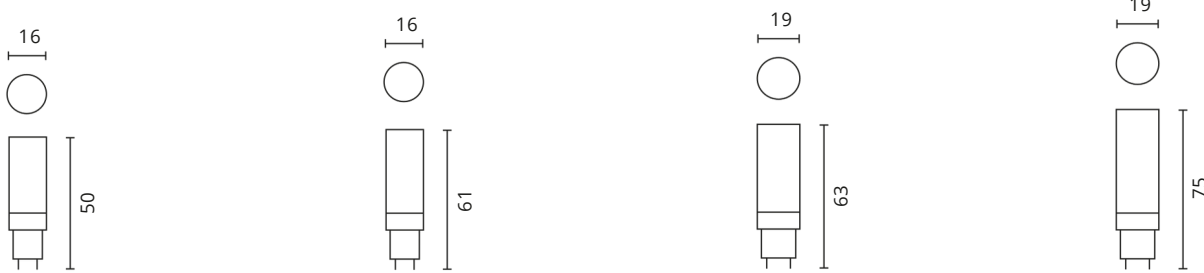

G9 / 4W
245480
209572
245534
245541

G9 / 6W
245947
209589
245954
245961

G9 / 8W
247903
209596
247910
247927

G9 / 12W
248900
209602
248917
248924



LED LIGHT SOURCE
GLASS

5
WARRANTY

220-240V
AC

220-260V
AC

ON/OFF
50.000

PF
0,4

PF
0,7

PF
0,8

[View product page](#)

EFFICACY 20-100 lm/W
Power [W]:
1-5.5
Luminous flux [lm]:
20-500
Beam angle [°]:
36-120
Colour temperature [K]:

2200

2700

3000

4000

6500

Green

Blue

Lifetime [h]:
L70B50 - 30.000
Type:
GU10, MR11
Housing:
glass


Versatile mounting options

Discover the exceptional quality of GU10 GLASS bulbs – a high-end LED lighting source designed for durability. With their glass housing, they ensure outstanding longevity and performance. These bulbs offer excellent lighting parameters.


With three beam angle options – 36°, 60°, and 120° – GLASS bulbs provides unmatched versatility, allowing you to tailor the lighting to your needs. Whether you need focused illumination (36°) for galleries and museums, balanced lighting (60°) for restaurants and meeting areas, or wide light distribution (120°) for corridors and staircases, these bulbs deliver perfect brightness for any space.




Luminous flux [lm]
273
Beam angle:
36°

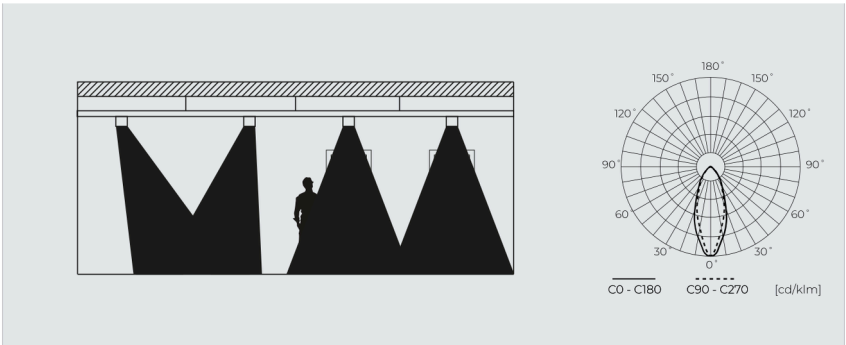

Luminous flux [lm]
345 - 500
Beam angle:
60°

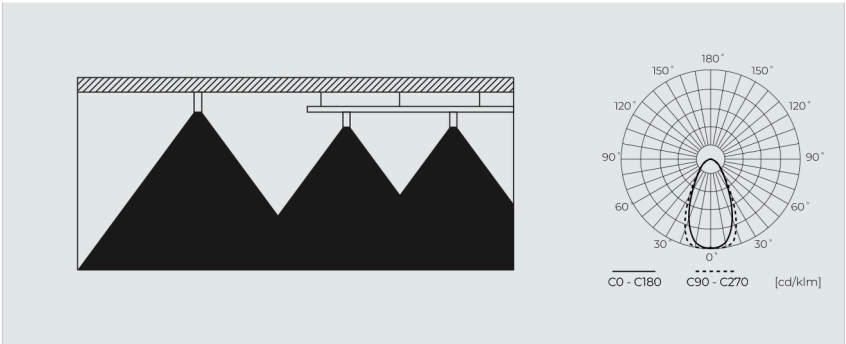

Luminous flux [lm]
80-450
Beam angle:
120°

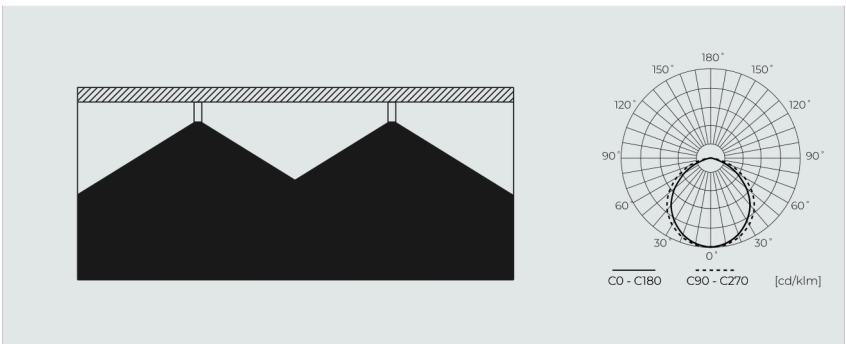

LED light source GLASS GU10 1W 230V




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
242250	1	120°	2700	80	A G G
209619 New	1	120°	3000	80	
248337	1	120°	4000	80	
242267	1	120°	6500	80	
242281	1	120°	BLUE 465nm	20	A G G

LED light source GLASS GU10 3W 230V




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
247835	3	36	2700	273	A G F
24782	3	°	4000	273	
8	3	36	6500	273	
247811		°			
		36			
241963	5	120°	2700	450	A G F
241 9	5	120°	4000	450	
70	5	120°	6500	450	
24198					
7					


DIMENSIONS [mm]



GU10 / 1W
242250
209619
248337
242267
242281



GU10 / 3W
247835
247828
247811



GU10 / 5W
241963
241970
241987

LED light source GLASS GU10 5,5W 230V DIMMABLE



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
240621	5,5	60°	2700	500	A G G
240638	5,5	60°	4000	550	A G F

LED light source GLASS GU10 5,5W 230V DIM TO WARM




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
248948	5,5	60°	2200-3000	345	A G G

LED light source GLASS MR16 3W 230V 12V AC/DC




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
247804	3	36°	2700	273	A G F
247798	3	36°	4000	273	
247781	3	36°	6500	273	


DIMENSIONS [mm]




GU10 / 5,5W / DIMMABLE
240621
240638



GU10 / 5,5W / DIM TO WARM
248948



MR16 / 3W
248948

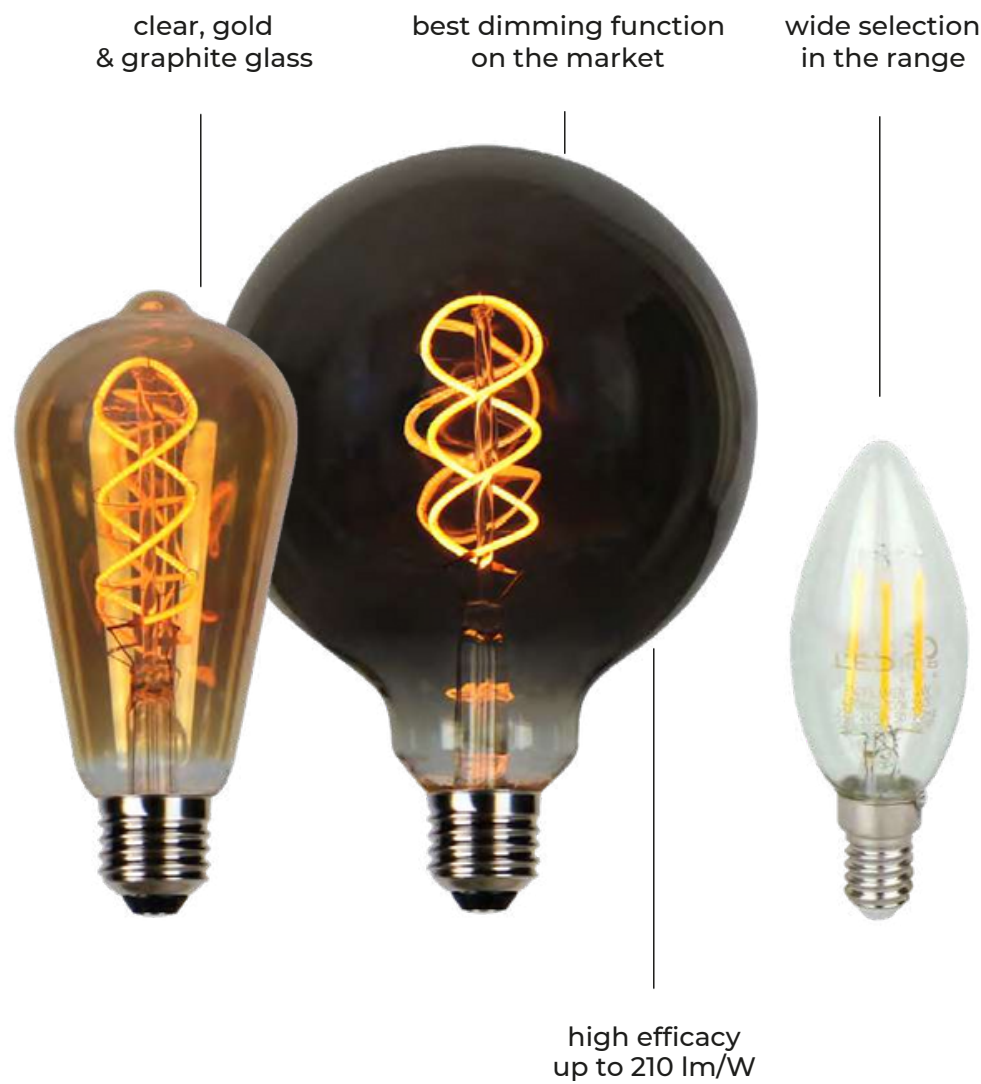

LED LIGHT SOURCE
FILAMENT

5
WARRANTY

3
WARRANTY

220-240V
AC

IP
20

ON/OFF
50,000

EFFICACY 120-210 lm/W
Power [W]:
4-10
Luminous flux [lm]:
150-1470
Beam angle [°]:
360
Colour temperature [K]:



Lifetime [h]:
L70B50 - 40.000 / 25.000
Type:
E27, E14
Housing:
gold, graphite
& transparent glass



[View product page](#)

LED light source FILAMENT E27 4W 230V ST64 RETRO DIMMABLE

SYMBOL	POWER [W]	BEAM ANGLE	COLOUR	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
202405	4	360°	gold	1800	210	
202412	4	360°	graphite	1800	150	
202399	4	360°	transparent	1800	230	




LED light source FILAMENT E27 4W 230V G125 RETRO


SYMBOL	POWER [W]	BEAM ANGLE	COLOUR	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
202375	4	360°	gold	1800	210	
202382	4	360°	graphite	1800	150	
202368	4	360°	transparent	1800	230	



DIMENSIONS [mm]



E27 ST64 / 4W
202405
202412
202399

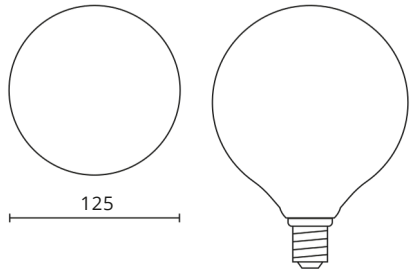

E27 G125 / 4W
202375
202382
202368

LED light source FILAMENT E27 230V A60



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202344	4	360°	4000	840	A A G E
202351	7	360°	4000	1470	



202269	7	360°	2700	840	A A G E
202276	7	360°	4000	840	

LED light source FILAMENT E27 7W 230V A60 DIMMABLE




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202320	7	360°	2700	840	A A G E
202337	7	360°	4000	840	

LED light source FILAMENT E27 10W 230V A60



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202283	10	360°	2700	1200	A A G E
202290	10	360°	4000	1200	


DIMENSIONS [mm]



E27 / 4W / 7W

202344 202351
202269 202276
202320 202337

DIMENSIONS [mm]



E27 / 10W

202283
202290

LED light source FILAMENT E14 4W 230V G45



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202221	4	360°	2700	480	A A G E
202238	5	360°	4000	480	

LED light source FILAMENT E14 4W 230V C35




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202184	4	360°	2700	480	A A G E
202191	4	360°	4000	480	
202207	6	360°	2700	720	A A G E
202214	6	360°	4000	720	

LED light source FILAMENT E14 5W 230V C35 DIMMABLE



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
202306	5	360°	2700	600	A A G E
202313	5	360°	4000	600	


DIMENSIONS [mm]



E14 / GLOBE

202221
202238

DIMENSIONS [mm]



E14 / CANDLE

202184
202191
202207
202214
202306
202313



LED LIGHT SOURCE
BASIC

3
WARRANTY

220-240V
AC

12 V
DC

175-265V
AC

180-265V
AC

IP
20

ON/OFF
50,000

PF
0,5

[View product page](#)


EFFICACY 80-110 lm/W
Power [W]:
1-12
Luminous flux [lm]:
80-1515
Beam angle [°]:
45-360
Colour temperature [K]:

2700300040006000




Lifetime [h]:
L70B50 - 50.000 / 30.000
Type:
E27, E14
Housing:
PVC


LED light source BASIC E27 230V A60

SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
	24725	6	240	3000	510
	5	6	°	4000	510
	24726		240		
	2		°		
	24738	10	240	3000	940
	5	10	°	4000	940
	24739		240		
	2		°		
	247408	12	240	3000	1212
	247415	12	°	4000	1212
	24742	15	240	3000	1515
	2	15	°	4000	1515
	24743		240		
	9		°		


DIMENSIONS [mm]



6W
247255
247262



10W / 12W
247385
247392
247408
247415



15W
24742
2
24743
9

LED light source BASIC E27 1W 230V G45



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
470317	1	270°	3000	80	A G F

LED light source BASIC E14 230V C37




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
24735	6	180°	3000	522	A G F
4	6	180°	4000	522	A G F

24734
7




471215	8	180°	3000	720	A G F
471222	8	180°	4000	720	


DIMENSIONS [mm]



10W
470317



6W
247354
247347



8W
471215
471222

LED light source G4 COB 1,5W 12V AC/DC



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
248979	1,5	360	2700	120	A G F
248986	1,5	o	6000	120	
		360			



LED light source G4 2W 12V DC SMD3014 SL

24450	2	360	3000	220	A G F
6	2	o	6000	220	A G F
244520		360			

LED light source ES111 12W 230V AC



SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEI
470324	12	45	2700	1080	A G F
470331	12	o	4000	1080	
		45			

LED light source ES111 9W 230V




SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	COLOUR	EEI
249587	9	120o	4000	850	white	A G F


DIMENSIONS [mm]




2W / G4
248979
248986




2W / G4
244506




2W / G4
244520



12W / AC
470324
470331



9W
249587

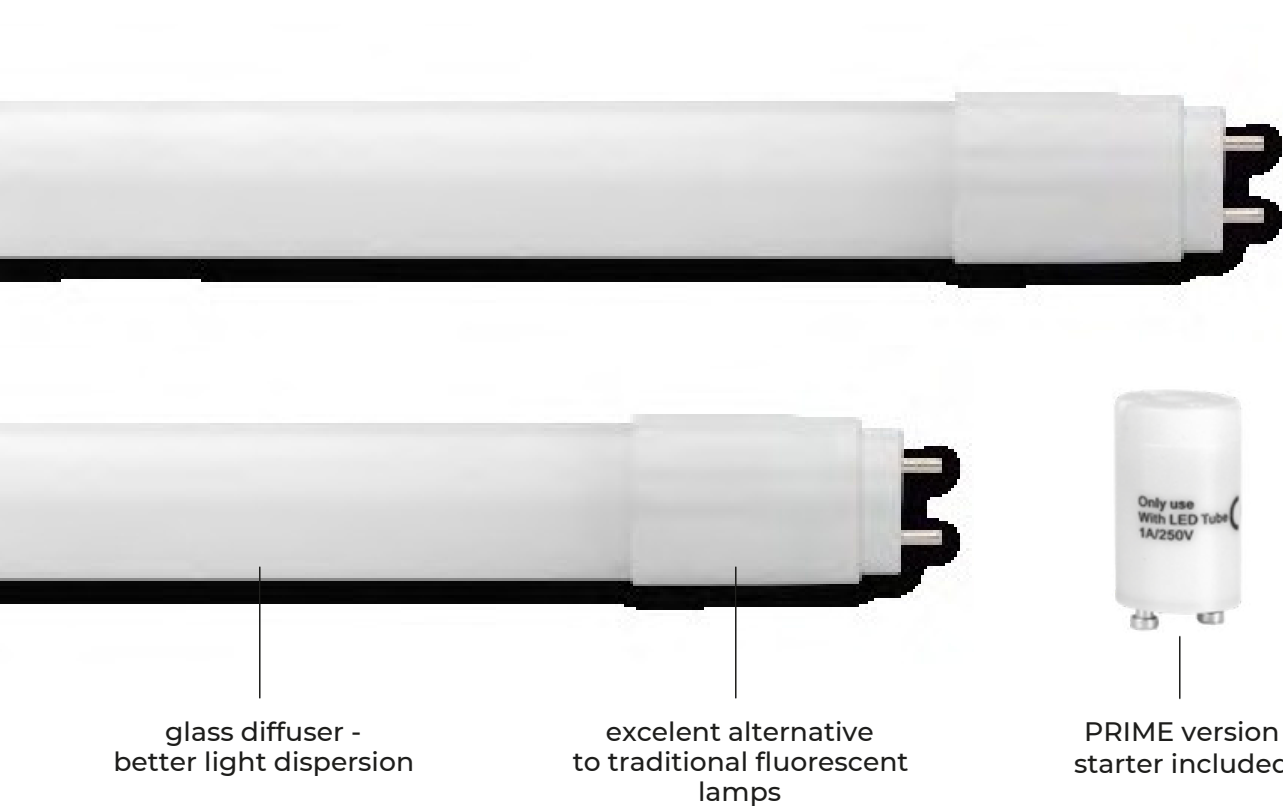

LED LIGHT SOURCE
T8 LED

5
WARRANTY

3
WARRANTY

220-240V
AC


ON/OFF
50.000

IP
20

PF
0,9

[View product page](#)

EFFICACY 100-150 lm/W
Power [W]:
9-22
Luminous flux [lm]:
900-3300
Beam angle [°]:
270
Colour temperature [K]:



Lifetime [h]:
L70B50 - 25.000
Type:
T8
Housing:
glass


T8 LED Tube PRIME 150lm/W 230V G13/T8 GLASS

SYMBOL	BEAM ANGLE	POWER [W]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	LENGTH [MM]	EEL
202061	270	9	4000	1350	600	A T G D
202078	o	9	6500	1350	600	
	270					
202085	270 o	18	4000	270	1200	A T G D
202092	o	18	6500	0	1200	
	270			270		
202108	270 o	22	4000	3300 0	1500	A T G D
202115	o	22	6500	3300	1500	
	270					
	o					

T8 LED Tube LITE 100lm/W 230V G13/T8 GLASS

SYMBOL	BEAM ANGLE	POWER [W]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	LENGTH [MM]	EEI
202009	270	9	4000	900	600	A C D
202016	o	9	6500	900	600	
	270					
202023	270 o	18	4000	1820	1200	A C D
20203	o	18	6500	1820	1200	
	270					
20204	270 o	22	4000	2265	1500	A C D
20207	o	22	6500	2265	1500	
202054	270					
	o					

DIMENSIONS [mm]

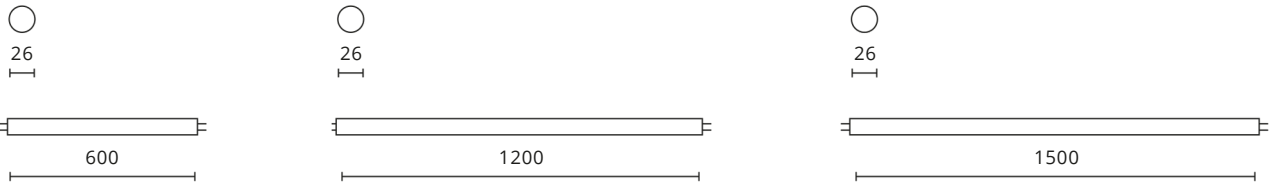

9W / 600mm
202061
202078
202061
202078

18W / 1200mm
202085 202092
202085 202092

22W / 1500mm
202108
202115
202108
202115



LED LIGHT SOURCE
ACCESSORIES



[View product page](#)

LED light source adapter E14



SYMBOL	FROM E14 TO
242052	E27
24206	GU10
9	MR16
246173	G9
246166	

LED light source adapter E27




SYMBOL	FROM E14 TO
242076	E14
24209	GU10
0	MR16
246210	E40
246241	2x E2 7
242083	

Extension of bulb mounting E27




SYMBOL	FROM E14 TO	LENGHT
242021	E27	200mm
242038	E14	200mm
24204	GU10	200mm
5		


DIMENSIONS [mm]



E14
242052
242069
246173
246166



E27
242076
242090
246210
24 6
241
242083

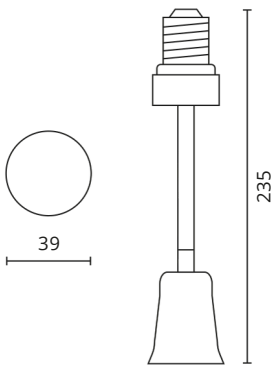

E27
242021
242038
242045

LED light source adapter GU10



SYMBOL	FROM GU10 TO
242113	E27
242106	E14
246180	MR16

LED light source adapter MR16



SYMBOL	FROM MR16 TO
246197	GU10

LED light source adapter B22




SYMBOL	FROM B22 TO
246302	E14
246272	GU10
246319	E40

Ceramic lamp holder with wire



SYMBOL	TYPE	WIRE LENGHT
246449	GU10	14 cm
246685	GU5 ⬠ 3	16 cm

DIMENSIONS [mm]

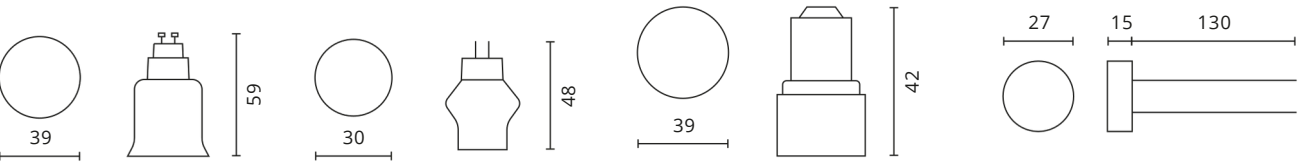

GU10
242113
242106
246180

MR16
246197

B22
246302
246272
246319

LAMP HOLDER
246449
246685





extra-long warranty
of 7 years

LED MODULE
EXPERT

7
WARRANTY


12
V
DC

ON/OFF
50.000

MAX
-40÷45°C

IP
65

PF
0,9



View product page

EFFICACY 95 lm/W
Power [W]:
1-3
Luminous flux [lm]:
95-285
Beam angle [°]:
170
Colour temperature [K]:
6500




Lifetime [h]:
L70B50 - 70.000
Housing:
PVC


LED Opto module IP65

SYMBOL	POWER [W]	BEAM ANGLE	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]	EEL
	1	170°	6500	95	A C F
	2	170°	6500	190	A C F
	2.5	170°	6500	237	A C F
	3	170°	6500	285	A C F


DIMENSIONS [mm]




1W
243400

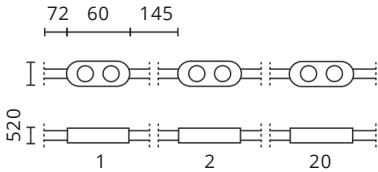

2W
243 41 7

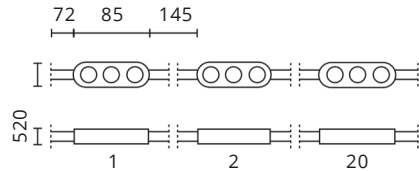

2.5W
243 4 24

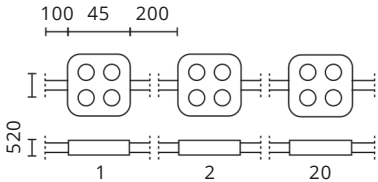

3W
243 43 1

LED line

08

OUTDOOR WALL LAMPS

CUBE & CILINDER
266

DECORATIVE

TAZA
270

CAMELIA
272

RIWIA
274

JUTE
276

SPOTLIGHTS

CLASSIC
278


WATERPROOF
284

ROLLO
288


CUBO
290



OUTDOOR WALL LAMP CUBE & CILINDER

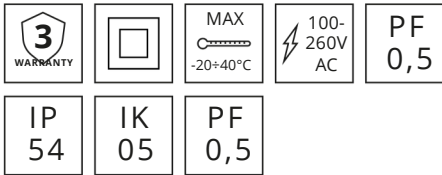


EFFICACY 140-150 lm/W
Power [W]:
2x3W
Luminous flux [lm]:
450
Beam angle [°]:
0 ÷ 120
Colour temperature [K]:



Lifetime [h]:
L70B50 - 30.000


Housing:
aluminium




Light distributions

The Cube & Cilinder luminaires feature an built-in adjustable shield system, allowing manual beam angle customization from 0° to 120°. Designed for up & down, down-only, or up-only lighting, they offer endless possibilities for creating stunning decorative effects on building facades and outdoor spaces. With full control over light distribution, you can shape the perfect ambiance for any architectural setting.


up&down

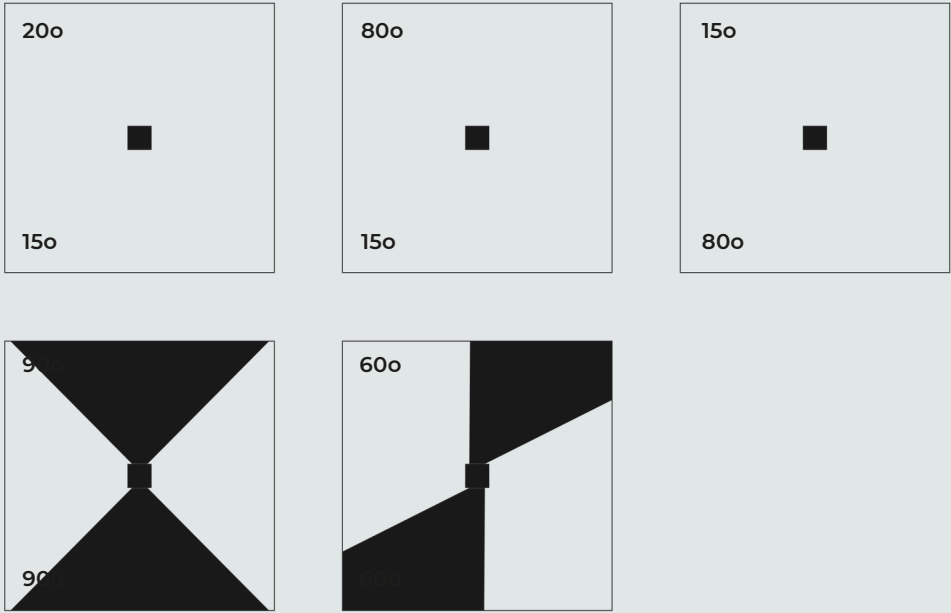

down-only

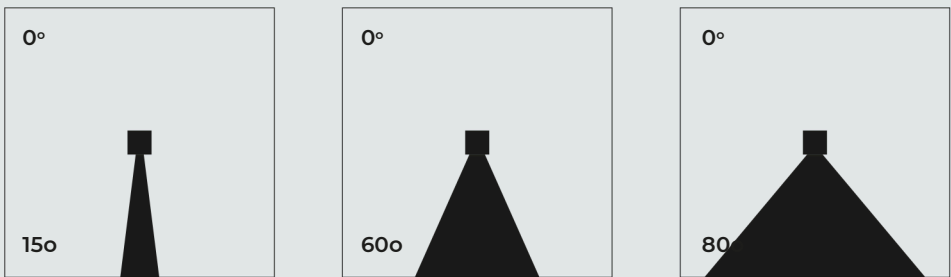

up-only

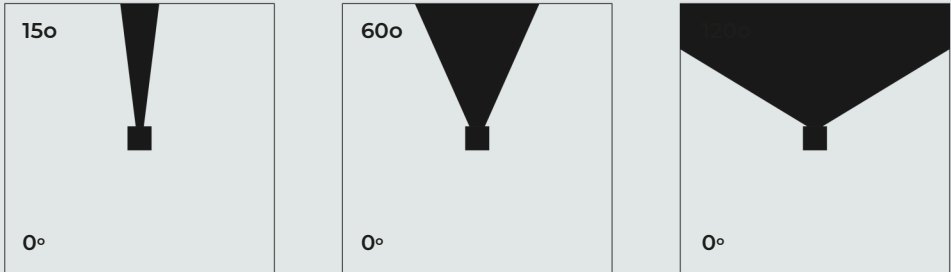

Outdoor wall lamp CUBE 2x3W

SYMBOL	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
478146	0 ÷ 120	3000	490
478177	0 ÷ 120	4000	490




478153	0 ÷ 120	3000	490
478184	0 ÷ 120	4000	490



478160	0 ÷ 120	3000	490
478191	0 ÷ 120	4000	490



DIMENSIONS [mm]



CUBE
478146
478177
478153
478184
478160
478191

Outdoor wall lamp CILINDER 2x3W

SYMBOL	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]
475510	0 ÷ 120	3000	490
475541	0 ÷ 120	4000	490




475527	0 ÷ 120	3000	490
475558	0 ÷ 120	4000	490



475534	0 ÷ 120	3000	490
475565	0 ÷ 120	4000	490



DIMENSIONS [mm]

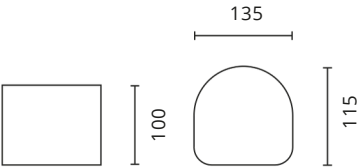

CILINDER
475510
475541
475527
475558
475534
475565



cable
included



universal type
C USB charging



waterproof
IP54

CCT

dimming
function

EFFICACY 115 lm/W

Power [W]:
3,5

Luminous flux [lm]:
400

Beam [o]:
120

Colour temperature [K]:
3000-5000



Lifetime [h]:
L70B50 - 30.000

Housing:

white black green





pink

gold

yellow



DECORATIVE TAZA

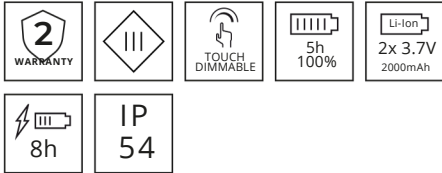


[View product page](#)

Table lamp TAZA 3,5W CCT 4000mAh IP54

SYMBOL	POWER [W]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]
203846	3,5	3000 - 5000	400
203853	3,5	3000 - 5000	400
204430	3,5	3000 - 5000	400
204447	3,5	3000 - 5000	400
208971	3,5	3000 - 5000	400
208694	3,5	3000 - 5000	400

DIMENSIONS [mm]



203846
203853
204430

204447
208971
208694



DECORATIVE
CAMELIA

2
WARRANTY

III

TOUCH
DIMMABLE

5h
100%

Li-Ion
2x 3.7V
2000mAh

8h

IP
20

[View product page](#)

EFFICACY 100 lm/W
Power [W]:
2,5
Luminous flux [lm]:
250
Beam [°]:
120
Colour temperature [K]:
3000-5000



Lifetime [h]:
L70B50 - 30.000


Housing:
aluminium



Table lamp CAMELIA 2,5W CCT 4000mAh IP20

SYMBOL	POWER [W]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]
204423	2,5	3000 - 5000	250
204454	2,5	3000 - 5000	250
204461	2,5	3000 - 5000	250

DIMENSIONS [mm]



204423
204454
204461



universal type
C USB charging





touch
control

CCT

dimming
function

lightweight
and portable

cable
included



DECORATIVE
RIWIA

2

WARRANTY

III

TOUCH
DIMMABLE

5h
100%

Li-Ion
2x 3.7V
2000mAh

8h

IP

20

[View product page](#)

EFFICACY 100 lm/W
Power [W]:
1
Luminous flux [lm]:
120
Beam [°]:
120
Colour temperature [K]:
3000-5000




Lifetime [h]:
L70B50 - 30.000
Housing:
aluminium



Table lamp RIWIA 1,0W CCT 1800mAh IP20


SYMBOL	POWER [W]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [LM]
 204478	1	3000 - 5000	120
 204485	1	3000 - 5000	120

DIMENSIONS [mm]



204492
2044
85

DECORATIVE
JUTE



View product page

Type
E27

Length:
1500mm
Housing:
jute cord

length 150cm

from 1 to 3
light points


installation of source
with E27 shaft

JUTE pendant lamp holder E27




SYMBOL	QUANTITY OF LIGHT POINTS	EXTENSION LENGHT	MATERIAL	VO LT A G E
249877	1	150 cm	jute cord	220-240VAC
249884	2	150 cm	jute cord	220-240VAC
249891	3	150 cm	jute cord	220-240VAC


DIMENSIONS [mm]



1 POINT
249877



2 POINTS
249884



3 POINTS
249891



LED SPOTLIGHT
CLASSIC

5
WARRANTY

MAX.
35W

IP
20


Mounting type:
recessed
Mounting hole size [mm]:
70 - 85
Shape:
round, square
Housing:
aluminium
black white satin

gold & blackgold & whitesilver

[View product page](#)

Recessed round spotlight die-cast

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FINISHING
241321	round	75mm	recessed	aluminium
241314	round	75mm	recessed	aluminium




Recessed adjustable round spotlight


244902	round	70mm	recessed	adjustable	brushed
244810	round	70mm	recessed	adjustable	brushed
244896	round	70mm	recessed	adjustable	sanded



DIMENSIONS [mm]



75mm
241321
241314




70mm
244902
244810
244896


Recessed adjustable round spotlight SLIM OROSA

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	FINISHING
	round	85mm	recessed	adjustable	brushed
	round	85mm	recessed	adjustable	brushed
	round	85mm	recessed	adjustable	brushed

Recessed adjustable square spotlight SLIM AKROS

	square	85mm	recessed	adjustable	brushed
	square	85mm	recessed	adjustable	brushed
	square	85mm	recessed	adjustable	matt

DIMENSIONS [mm]

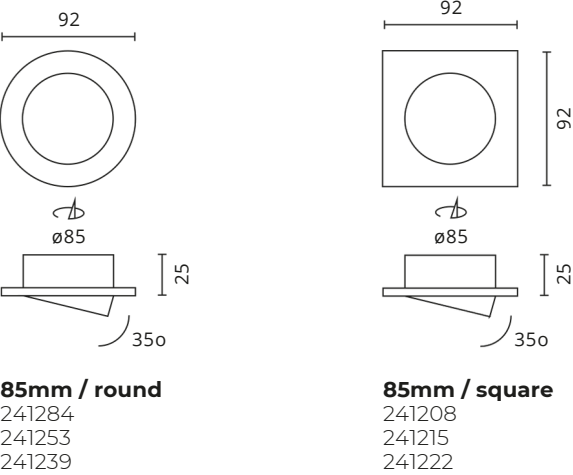


Recessed round spotlight die-cast

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	FINISHING
	round	65mm	recessed	recessed	matt
	round	65mm	recessed	recessed	polished
	round	65mm	recessed	recessed	matt

Recessed adjustable round spotlight die-cast

	round	80mm	recessed	adjustable	polished
	round	80mm	recessed	adjustable	matt
	round	80mm	recessed	adjustable	matt

DIMENSIONS [mm]

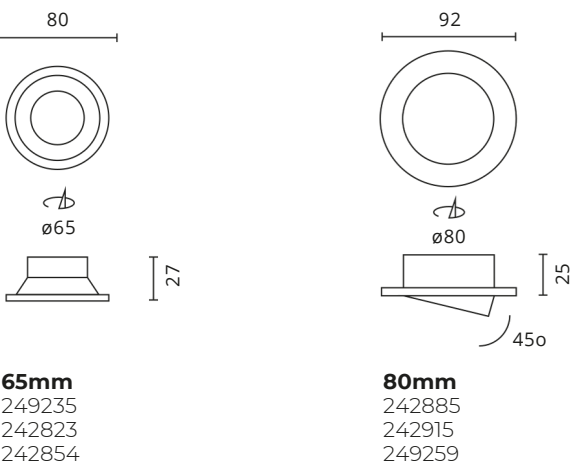


Recessed adjustable square spotlight die-cast

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	FINISHING
242946	square	75mm	recessed	adjustable	polished
242977	square	75mm	recessed	adjustable	matt





DIMENSIONS [mm]

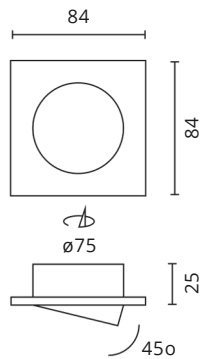


75mm
242939
242946
242977

Downlight alu. square brushed adjustable

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	FINISHING
241093	square	75-80mm	recessed	adjustable	brushed
240683	square	75-80mm	recessed	adjustable	brushed
240669	square	75-80mm	recessed	adjustable	brushed



DIMENSIONS [mm]

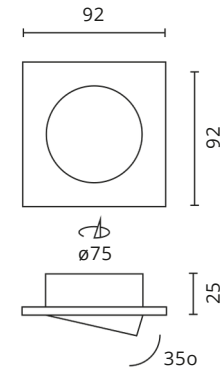

75-80mm
241093
240683
240669



LED SPOTLIGHT
WATERPROOF

5
WARRANTY

MAX.
35W

IP
20

Mounting type:
recessed, surface

Mounting hole size [mm]:
45 - 73

Shape:
round, square

Housing:
aluminium
black white

satin


chrome

[View product page](#)

Recessed waterproof round spotlight MR11

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
	round	45mm	recessed	waterproof	zinc
	round	45mm	recessed	waterproof	zinc
	round	45mm	recessed	waterproof	zinc


DIMENSIONS [mm]




249266
249273
249297

Recessed waterproof round spotlight die-cast

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
245428	round	73mm	recessed	waterproof	aluminium
245435	round	73mm	recessed	waterproof	aluminium
245442	round	73mm	recessed	waterproof	aluminium
471055	round	73mm	recessed	waterproof	aluminium




DIMENSIONS [mm]



245428
245435
245442
471055

Recessed waterproof square spotlight die-cast

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
245374	square	73mm	recessed	waterproof	aluminium
245398	square	73mm	recessed	waterproof	aluminium
471062	square	73mm	recessed	waterproof	aluminium




Surface round spotlight TUBE


SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
242540	round	surface	waterproof	waterproof	aluminium
242557	round	surface	waterproof	waterproof	aluminium




DIMENSIONS [mm]



245374
245398
471062



242540
242557

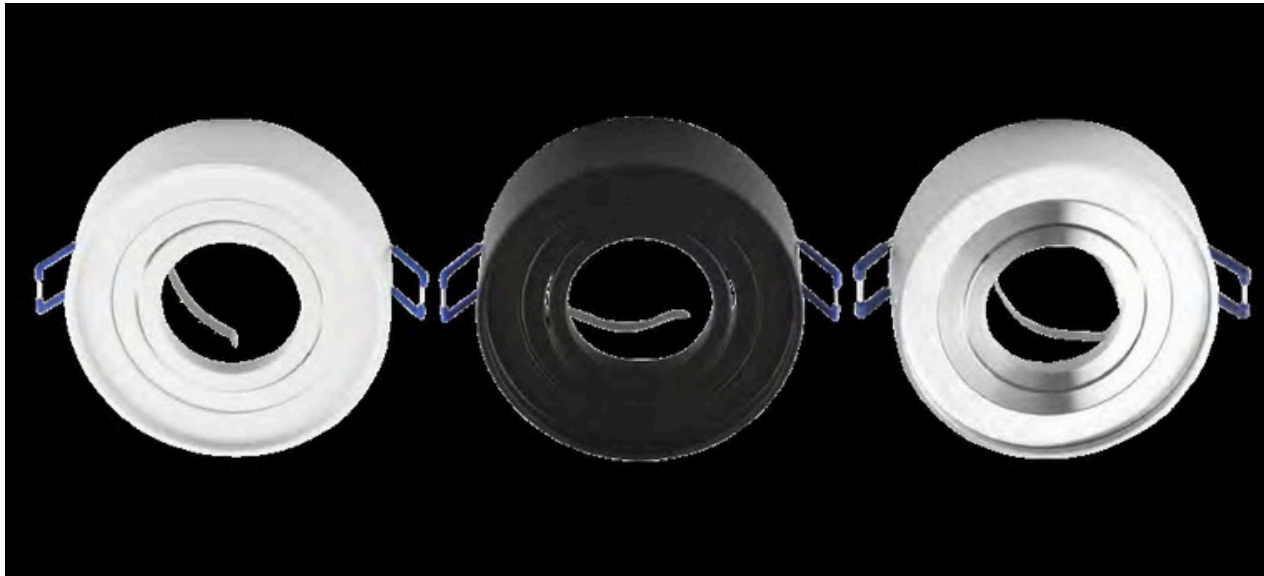


LED SPOTLIGHT
ROLLO

5
WARRANTY

MAX.
35W

IP
20


Mounting type:
recessed
Mounting hole size [mm]:
85mm
Shape:
round
Housing:
aluminium
black white silver



Recessed round spotlight ROLLO MIDI

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FEATURE	MATERIAL
	round	85mm	recessed	adjustable	aluminium
	round	85mm	recessed	adjustable	aluminium
	round	85mm	recessed	adjustable	aluminium

DIMENSIONS [mm]

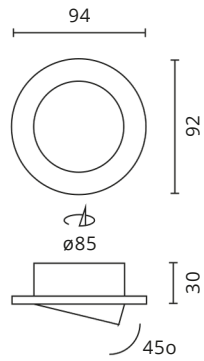

242656
243851
243134



LED SPOTLIGHT
CUBO

5
WARRANTY

MAX.
35W

IP
20

Mounting type:
recessed, surface
Mounting hole size [mm]:
85mm
Shape:
square
Housing:
aluminium
white silver



[View product page](#)

Downlight recessed-mounted square white CUBO MIDI

SYMBOL	SHAPE	MOUNTING HOLE SIZE	MOUNTING TYPE	FIXTURE COLOUR	MATERIAL
243141	square	85mm	recessed	white	aluminium




Tube surface spotlight square adjustable CUBO


SYMBOL	SHAPE	MOUNTING TYPE	FEATURE	FINISHING	MATERIAL
249723	square	surface	adjustable	white	aluminium
249747	square	surface	adjustable	brushed silver	aluminium



DIMENSIONS [mm]

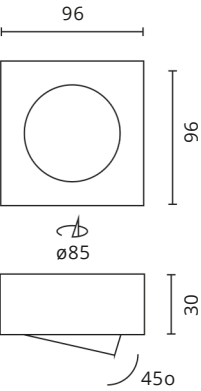

CUBO recessed
243141

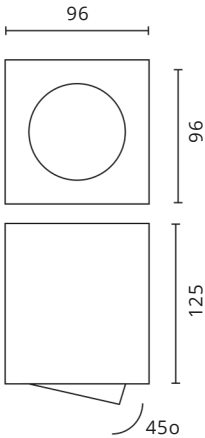

CUBO surface
249723 249747

PRODUCT INDEX

FLOODLIGHTS
294

HIGH BAY
294

PARK LUMINAIRES
295

SOLAR ROAD LUMINAIRES
296

CEILING LAMPS
296

LINEAR LAMPS
297

LED STRIPS
298

LED DRIVERS
300

LED LIGHT SOURCES
300

OUTDOOR WALL LAMPS
302

LED SPOTLIGHTS
302

SOLAR FLOODLIGHTS
294

HERMETIC LUMINAIRE
295

ROAD LUMINAIRES
296

LED PANELS
296

DOWNLIGHTS
296

TRACK LIGHTS
298

LED CONTROLLERS
300

LED PROFILES
300

LED MODULES
302

DECORATIVE
302

PRODUCT INDEX

FLOODLIGHTS

Symbol	N a zwa	Page
200203	FLOODLIGHT PRIME 30W 4200lm 4000K 120°	20
200289	FLOODLIGHT PRIME 30W 4200lm 4000K 90°	20
200272	FLOODLIGHT PRIME 30W 4200lm 4000K 60°	20
200265	FLOODLIGHT PRIME 30W 4200lm 4000K 30°	20
202566	FLOODLIGHT PRIME 30W 4200lm 4000K T2	20
202559	FLOODLIGHT PRIME 30W 4200lm 4000K T3	20
202726	FLOODLIGHT PRIME 30W 4200lm CCT 120°	20
202900	FLOODLIGHT PRIME 30W 4200lm CCT 30°	20
202733	FLOODLIGHT PRIME 30W 4200lm CCT T2	20
200210	FLOODLIGHT PRIME 50W 7000lm 4000K 120°	20
200319	FLOODLIGHT PRIME 50W 7000lm 4000K 90°	20
200302	FLOODLIGHT PRIME 50W 7000lm 4000K 60°	20
200296	FLOODLIGHT PRIME 50W 7000lm 4000K 30°	20
202443	FLOODLIGHT PRIME 50W 7000lm 4000K T2	20
202542	FLOODLIGHT PRIME 50W 7000lm 4000K T3	20
202757	FLOODLIGHT PRIME 50W 7000lm CCT 120°	20
202948	FLOODLIGHT PRIME 50W 7000lm CCT 30°	20
202740	FLOODLIGHT PRIME 50W 7000lm CCT T2	20
200227	FLOODLIGHT PRIME 100W 14000lm 4000K 120°	21
200340	FLOODLIGHT PRIME 100W 14000lm 4000K 90°	21
200333	FLOODLIGHT PRIME 100W 14000lm 4000K 60°	21
200326	FLOODLIGHT PRIME 100W 14000lm 4000K 30°	21
202450	FLOODLIGHT PRIME 100W 14000lm 4000K T2	21
202528	FLOODLIGHT PRIME 100W 14000lm 4000K T3	21
202764	FLOODLIGHT PRIME 100W 14000lm CCT 120°	21
202986	FLOODLIGHT PRIME 100W 14000lm CCT 30°	21
202771	FLOODLIGHT PRIME 100W 14000lm CCT T2	21
200647	FLOODLIGHT PRIME 150W 21000lm 4000K 120°	21
202610	FLOODLIGHT PRIME 150W 21000lm 4000K 90°	21
200654	FLOODLIGHT PRIME 150W 21000lm 4000K 60°	21
202603	FLOODLIGHT PRIME 150W 21000lm 4000K 30°	21
202580	FLOODLIGHT PRIME 150W 21000lm 4000K T2	21
202627	FLOODLIGHT PRIME 150W 21000lm 4000K T3	21
202788	FLOODLIGHT PRIME 150W 21000lm CCT 120°	21
203020	FLOODLIGHT PRIME 150W 21000lm CCT 30°	21
202795	FLOODLIGHT PRIME 150W 21000lm CCT T2	21
200234	FLOODLIGHT PRIME 200W 28000lm 4000K 120°	22
200371	FLOODLIGHT PRIME 200W 28000lm 4000K 90°	22
200364	FLOODLIGHT PRIME 200W 28000lm 4000K 60°	22
200357	FLOODLIGHT PRIME 200W 28000lm 4000K 30°	22
202467	FLOODLIGHT PRIME 200W 28000lm 4000K T2	22
202535	FLOODLIGHT PRIME 200W 28000lm 4000K T3	22
202801	FLOODLIGHT PRIME 200W 28000lm CCT 120°	22
203068	FLOODLIGHT PRIME 200W 28000lm CCT 30°	22
202818	FLOODLIGHT PRIME 200W 28000lm CCT T2	22
200241	FLOODLIGHT PRIME 400W 56000lm 4000K 120°	22
202689	FLOODLIGHT PRIME 400W 56000lm 4000K 90°	22
202672	FLOODLIGHT PRIME 400W 56000lm 4000K 60°	22
202665	FLOODLIGHT PRIME 400W 56000lm 4000K 30°	22
200401	FLOODLIGHT PRIME 400W 56000lm 4000K T2	22
202696	FLOODLIGHT PRIME 600W 84000lm T3	22
200258	FLOODLIGHT PRIME 600W 4000K 84000lm 120°	22
202658	FLOODLIGHT PRIME 600W 4000K 84000lm 90°	22
202641	FLOODLIGHT PRIME 600W 4000K 84000lm 60°	22
202634	FLOODLIGHT PRIME 600W 4000K 84000lm 30°	22
202597	FLOODLIGHT PRIME 600W 4000K 84000lm T2	22
200418	FLOODLIGHT PRIME 400W 56000lm 4000K T3	22
217669	Floodlight ESTADIO 200W CRI>80 20o	27
217063	Floodlight ESTADIO 200W CRI>80 40o	27
217010	Floodlight ESTADIO 200W CRI>80 60o	27
217027	Floodlight ESTADIO 200W CRI>80 90o	27
217034	Floodlight ESTADIO 200W CRI>80 P50	27
217676	Floodlight ESTADIO 250W CRI>80 20o	27

Symbol	N a zwa	Page
217041	Floodlight ESTADIO 250W CRI>80 40o	27
217058	Floodlight ESTADIO 250W CRI>80 60o	27
217065	Floodlight ESTADIO 250W CRI>80 90o	27
217072	Floodlight ESTADIO 250W CRI>80 P50	27
217492	Floodlight ESTADIO 300W CRI>80 20o	27
217089	Floodlight ESTADIO 300W CRI>80 40o	27
217096	Floodlight ESTADIO 300W CRI>80 60o	27
217 102	Floodlight ESTADIO 300W CRI>80 90o	27
217 119	Floodlight ESTADIO 300W CRI>80 P50	27
217508	ESTADIO anti-glare shield for single module	28
217 126	ESTADIO mounting bracket for single module	28
217 133	ESTADIO mounting bracket for 2-4 modules	28
217 140	Laser pointer to position luminaires on pole	28
203495	Floodlight PHOTON 10W 1000lm 4000K	32
203501	Floodlight PHOTON 10W 1000lm 4000K motion sensor	32
203518	Floodlight PHOTON 20W 2000lm 4000K	32
203488	Floodlight PHOTON 20W 2000lm 4000K motion sensor	32
203525	Floodlight PHOTON 30W 3000lm 4000K	32
203532	Floodlight PHOTON 30W 3000lm 4000K motion sensor	32
203549	Floodlight PHOTON 50W 5000lm 4000K	33
203556	Floodlight PHOTON 50W 5000lm 4000K motion sensor	33
203563	Floodlight PHOTON 100W 10000lm 4000K	33
203747	Floodlight PHOTON 100W 10000lm 4000K motion sensor	33
470492	Floodlight PHOTON 50W RGB	33
203280	Floodlight LUMINO 10W 1000lm 4000K	36
203358	Floodlight LUMINO 10W 1000lm 4000K motion sensor	36
203297	Floodlight LUMINO 20W 2000lm 4000K	36
203365	Floodlight LUMINO 20W 2000lm 4000K motion sensor	36
203303	Floodlight LUMINO 30W 3000lm 4000K	36
203372	Floodlight LUMINO 30W 3000lm 4000K motion sensor	36
203310	Floodlight LUMINO 50W 5000lm 4000K	36
203389	Floodlight LUMINO 50W 5000lm 4000K motion sensor	36
203327	Floodlight LUMINO 100W 10000lm 4000K	37
203334	Floodlight LUMINO 150W 15000lm 4000K	37
203341	Floodlight LUMINO 200W 20000lm 4000K	37

SOLAR FLOODLIGHTS

Symbo	N a zwa	Page
I 211339	Solar floodlight LUNIR 50W 4000K 1400lm 4W5V	43
211346	Solar floodlight FLOWLITE 1,75W CCT 1000lm	45

HIGH BAY

Symbol	N a zwa	Page
207028	High bay PHANTOM 190 100W 19000lm 4000K 60 1-10V motion sensor	51
207011	High bay PHANTOM 190 100W 19000lm 4000K 90 1-10V motion sensor	51
207004	High bay PHANTOM 190 100W 19000lm 4000K 120 1-10V motion sensor	51
207059	High bay PHANTOM 190 150W 28500lm 4000K 60 1-10V motion sensor	51
207042	High bay PHANTOM 190 150W 28500lm 4000K 90 1-10V motion sensor	51
207035	High bay PHANTOM 190 150W 28500lm 4000K 120 1-10V motion sensor	51
207080	High Bay PHANTOM 190 200W 38000lm 4000K 60 1-10V motion sensor	51
207073	High Bay PHANTOM 190 200W 38000lm 4000K 90 1-10V motion sensor	51
207066	High Bay PHANTOM 190 200W 38000lm 4000K 120 1-10V motion sensor	51
206601	High Bay PHANTOM 190 200W 38000lm 4000K 120 1-10V motion sensor	52
206595	High bay PHANTOM 190 70W 13300lm 4000K 60 1-10V	52
206588	High bay PHANTOM 190 70W 13300lm 4000K 90 1-10V	52
203167	High bay PHANTOM 190 70W 13300lm 4000K 120 1-10V	52
203150	High bay PHANTOM 190 100W 19000lm 4000K 601-10V	52
203143	High bay PHANTOM 190 100W 19000lm 4000K 90 1-10V	52
	High bay PHANTOM 190 100W 19000lm 4000K 120 1-10V	

Symbo	N a zwa	Page
I	High bay PHANTOM 190 150W 28500lm 4000K 60 1-10V	52
203198	High bay PHANTOM 190 150W 28500lm 4000K 90 1-10V	52
203181	High bay PHANTOM 190 150W 28500lm 4000K 120 1-10V	52
203174	High bay PHANTOM 190 200W 38000lm 4000K 60 1-10V	52
203228	High bay PHANTOM 190 200W 38000lm 4000K 90 1-10V	52
203211	High bay PHANTOM 190 200W 38000lm 4000K 120 1-10V	52
203204	High bay PHANTOM 190 70W 13300lm 4000K 60 1-10V CRI>80	53
216259 216228	High bay PHANTOM 190 70W 13300lm 4000K 90 1-10V CRI>80	53
216280	High bay PHANTOM 190 70W 13300lm 4000K 120 1-10V CRI>80	53
216525	High bay PHANTOM 190 100W 19000lm 4000K 60 1-10V CRI>80	53
216495	High bay PHANTOM 190 100W 19000lm 4000K 90 1-10V CRI>80	53
216556	High bay PHANTOM 190 100W 19000lm 4000K 120 1-10V CRI>80	53
216433	High bay PHANTOM 190 150W 28500lm 4000K 60 1-10V CRI>80	53
216402	High bay PHANTOM 190 150W 28500lm 4000K 90 1-10V CRI>80	53
216464	High bay PHANTOM 190 150W 28500lm 4000K 120 1-10V CRI>80	53
216341	High bay PHANTOM 190 200W 38000lm 4000K 60 1-10V CRI>80	53
216310	High bay PHANTOM 190 200W 38000lm 4000K 90 1-10V CRI>80	53
216372	High bay PHANTOM 190 200W 38000lm 4000K 90 1-10V CRI>80	53
216242	High bay PHANTOM 190 200W 38000lm 4000K 120 1-10V CRI>80	54
216211	High bay PHANTOM 190 70W 13300lm 4000K 60 DALI	54
216273	High bay PHANTOM 190 70W 13300lm 4000K 90 DALI	54
216518	High bay PHANTOM 190 70W 13300lm 4000K 120 DALI	54
216488	High bay PHANTOM 190 100W 19000lm 4000K 60 DALI	54
216549	High bay PHANTOM 190 100W 19000lm 4000K 90 DALI	54
216426	High bay PHANTOM 190 100W 19000lm 4000K 90 DALI	54
216396	High bay PHANTOM 190 100W 19000lm 4000K 120 DALI	54
216457	High bay PHANTOM 190 150W 28500lm 4000K 60 DALI	54
216334	High bay PHANTOM 190 150W 28500lm 4000K 60 DALI	54
216303	High bay PHANTOM 190 150W 28500lm 4000K 120 DALI	54
216365	High bay PHANTOM 190 200W 38000lm 4000K 60 DALI	54
216266	High bay PHANTOM 190 200W 38000lm 4000K 90 DALI	55
	High bay PHANTOM 190 200W 38000lm 4000K 120 DALI	
216235	High bay PHANTOM 190 70W 13300lm 4000K 60 DALI CRI>80	55
216297	High bay PHANTOM 190 70W 13300lm 4000K 90 DALI CRI>80	55
216532	High bay PHANTOM 190 70W 13300lm 4000K 120 DALI CRI>80	55
216501	High bay PHANTOM 190 100W 19000lm 4000K 60 DALI CRI>80	55
216563	High bay PHANTOM 190 100W 19000lm 4000K 90 DALI CRI>80	55
216440	High bay PHANTOM 190 100W 19000lm 4000K 120 DALI CRI>80	55
216419	High bay PHANTOM 190 150W 28500lm 4000K 120 DALI CRI>80	55
216471	High bay PHANTOM 190 150W 28500lm 4000K 60 DALI CRI>80	55
	High bay PHANTOM 190 150W 28500lm 4000K 60 DALI CRI>80	
216358	High bay PHANTOM 190 150W 28500lm 4000K 90 DALI CRI>80	55
216327	High bay PHANTOM 190 150W 28500lm 4000K 120 DALI CRI>80	55
216389	High bay PHANTOM 190 200W 38000lm 4000K 60 DALI CRI>80	55
470935	High bay PHANTOM 190 200W 38000lm 4000K 90 DALI CRI>80	57
203396	High bay PHANTOM 190 200W 38000lm 4000K 120 DALI CRI>80	59
203402	High bay PHANTOM 190 200W 38000lm 4000K 120 DALI CRI>80	59
203419	High bay UFO RAIDER 130 100W 13000lm 4000K	59
206748	High bay ECOBEAM 100W 10000lm 4000K	63
206755	High bay ECOBEAM 150W 15000lm 4000K	63
206762	High bay ECOBEAM 200W 20000lm 4000K	63
206779	High bay STREAKBAY 50W 5000lm 4000K	63
206786	High bay STREAKBAY 100W 10000lm 4000K	63
210189	High bay STREAKBAY 150W 15000lm 4000K	69
	High bay STREAKBAY 200W 20000lm 4000K	
	Steel wires	
	Hermetic luminaire RANGER 10-40W 7200lm 4000K 1-10V 180lm/W	

HERMETIC LUMINAIRE

Symbol	Nazwa	Page
210196	Hermetic luminaire RANGER 10-40W 7200lm 4000K 1-10V 180lm/W motion sensor	69
210226	Hermetic luminaire RANGER 25-55W 9900lm 4000K 1-10V 180lm/W	69
210233	Hermetic luminaire RANGER 30-55W 9900lm 4000K 1-10V 180lm/W motion sensor	69
210264	Hermetic luminaire RANGER 60-80W 14400lm 4000K 1-10V 180lm/W	69
210271	Hermetic luminaire RANGER 60-80W 14400lm 4000K 1-10V 180lm/W motion sensor	69
210202	Hermetic luminaire RANGER 10-40W CCT 6000lm 4000K 1-10V 150lm/W	69
210219	Hermetic luminaire RANGER 10-40W CCT 6000lm 4000K 1-10V 150lm/W	69
210240	Hermetic luminaire RANGER 30-55W CCT 8250lm 4000K 1-10V 150lm/W	69
21025	Hermetic luminaire RANGER 30-55W CCT 8250lm 4000K 1-10V 150lm/W	69
7	Hermetic luminaire RANGER C 40W 6800lm 4000K 1-10V	69
20126	Hermetic luminaire RANGER C 40W 6800lm 4000K 1-10V	69
479587	Hermetic luminaire RANGER C lamp 40W 5600lm 4000K IP66	73
479597	Hermetic luminaire LINKER 21W 3150lm 4000K 150lm/W 220-240V IP65 Emergency module 3H AT	73
203709	Hermetic luminaire LINKER 30W 4500lm 4000K 150lm/W 220-240V IP65	73
203709	Hermetic luminaire LINKER 30W 4500lm 4000K 150lm/W 220-240V IP65 Emergency module 3H AT	73
479594	Hermetic luminaire LINKER 40W 6000lm 4000K 150lm/W 220-240V IP65	73
479594	Hermetic luminaire LINKER 40W 6000lm 4000K 150lm/W 220-240V IP65 Emergency module 3H AT	73
201279	Hermetic luminaire LINKER 40W 6000lm 5000K 150lm/W IP65	73
203754	Hermetic luminaire LINKER 40W 6000lm 4000K 150lm/W IP65 black	73
203754	Hermetic luminaire LINKER 40W 6000lm 4000K 150lm/W IP65 black Emergency module 3H AT	73
479600	Hermetic luminaire LINKER 55W 8250lm 4000K 150lm/W IP65	73
479600	Hermetic luminaire LINKER 55W 8250lm 4000K 150lm/W IP65 Emergency module 3H AT	73
201057	Hermetic luminaire LINKER 80W 12000lm 4000K 150lm/W IP65	73
201057	Hermetic luminaire LINKER 80W 12000lm 4000K 150lm/W IP65 Emergency module 3H AT	73
211605	Hermetic luminaire LINIX 120cm 36W 4000K 4320lm IP65	75
211612	Hermetic luminaire LINIX 150cm 45W 4000K 5400lm IP65	75
477606	TRI-PROOF 30W 4000K 3600lm 650mm	77
477644	TRI-PROOF 30W 4000K 3600lm 650mm motion sensor	77
477613	TRI-PROOF 40W 4000K 4800lm 1250mm	77
477651	TRI-PROOF 40W 4000K 4800lm 1250mm motion sensor	77
477620	TRI-PROOF 70W 4000K 8400lm 1550mm	77
477637	TRI-PROOF 90W 4000K 10800lm 1550mm	77
203860-II	Hermetic luminaire VANTA 60cm T8x1 LED ABS/PS	79
203877-II	Hermetic luminaire VANTA 60cm T8x2 LED ABS/PS	79
203884-II	Hermetic luminaire VANTA 120cm T8x1 LED ABS/PS	79
203891-II	Hermetic luminaire VANTA 120cm T8x2 LED ABS/PS	79
203907-II	Hermetic luminaire VANTA 150cm T8x1 LED ABS/PS	79
203914-II	Hermetic luminaire VANTA 150cm T8x2 LED ABS/PS	79

PARK LUMINAIRES

Symbo	N a zwa	Page
I 207127	Park luminaire NOLINA 30W 4000K	83
207134	4500lm Park luminaire NOLINA 60W	83
207486	4000K 9000lm	88
207462	Park luminaire PARKLITE 50W CCT 6000lm 3000-4000-6500K black	88
207479	Park luminaire PARKLITE 50-80-100W CCT 6000-12000lm 4000K black	88
209848	Park luminaire PARKLITE 80-100-120W CCT 9600-14400lm 3000-4000-6500K black	88
209824	Park luminaire PARKLITE 50W CCT 6000lm 3000-4000-6500K grey	88
209831	Park luminaire PARKLITE 50-80-100W CCT 6000-12000lm 4000K grey	88
	Park luminaire PARKLITE 80-100-120W CCT 9600-14400 lm 3000-4000-6500K grey	

ROAD LUMINAIRES

Symbol	N a zwa	Page
475473	Road luminaire ELIDA 40W 4800lm 4000K 120lm/W 100-277V AC T3	91
478498	Road luminaire ELIDA 70W 8400lm 4000K 120lm/W 100-277V AC T3	91
206564	Road luminaire CAMINO 50W 6500lm 3000K	96
203105	Road luminaire CAMINO 50W 7000lm 4000K	96
216792	Road luminaire CAMINO 70W 9800lm 4000K	96
206571	Road luminaire CAMINO 100W 13000lm 3000K	96
203112	Road luminaire CAMINO 100W 14000lm 4000K	96
203129	Road luminaire CAMINO 150W 21000lm 4000K	97
203136	Road luminaire CAMINO 200W 28000lm 4000K	97
203815	Road luminaire FLAMINGO 30W 3000lm 4000K black	101
203822	Road luminaire FLAMINGO 50W 5000lm 4000K black	101
203839	Road luminaire FLAMINGO 100W 10000lm 4000K black	101
203785	Road luminaire FLAMINGO 30W 4000K 3000lm grey	101
206960	Road luminaire FLAMINGO 30W 4000K 3000lm twilight sensor grey	101
203792	Road luminaire FLAMINGO 50W 4000K 5000lm grey	101
206977	Road luminaire FLAMINGO 50W 4000K 5000lm twilight sensor grey	101
203808	Road luminaire FLAMINGO 100W 4000K 10000lm grey	101
206984	Road luminaire FLAMINGO 100W 4000K 10000lm twilight sensor grey	101
203716	Road luminaire STREETLITE 50W 5000lm 4000K black	103
203723	Road luminaire STREETLITE 100W 10000lm 4000K black	103
201064	Road luminaire STREETLITE 50W 5000lm 4000K grey	103
201071	Road luminaire STREETLITE 100W 10000lm 4000K grey	103
201088	Road luminaire STREETLITE 100W 10000lm 4000K grey	103
209800	Road luminaire STREETLITE 150W 15000lm 4000K grey	108
206618	Split pole 3m black	108
206625	Split pole 4m black	108
206632	Pole extension 1m black	108
206649	Floodlight bracket black	108
209916	Steel frame 180mm	109
209886	Split pole 3m grey	109
209893	Split pole 4m grey	109
209909	Pole extension 1m grey	109
	Floodlight bracket grey	

SOLAR ROAD LUMINAIRES

Symbol	N a zwa	Page
211315	Solar road luminaire SUNSTREET 100W 6500K 600lm	111
211322	Solar road luminaire SUNSTREET 150W 6500K 1300lm	111

LED PANELS

Symbol	Nazwa	Page
244193	Panel DIORA 15-36W 2250-5040lm 4000K	115
471260	Panel DIORA 36W 5040lm 4000K 1-10V	115
475459	Panel 2in1 30W 3600lm 4000K 120x30 1195x295	121
478481	Panel 2in1 30W 3600lm 4000K 595x595	121
205970	Panel Backlit 25W 4000lm 4000K 595x595	124
205987	Panel Backlit 25W 4000lm 4000K 595x595 0-10V	124
201255	Panel Backlit 28W 4000lm 4000K 595x595	124
205819	Panel Backlit 34W 4760lm 4000K 595x595	124
205826	Panel Backlit 34W 4760lm 4000K 595x595 0-10V	124
200180	Panel Backlit 40W 4800lm 4000K 595x595	124
201248	Panel Backlit 40W 4800lm 4000K 595x595 0-10V	124
201330	Panel Backlit 40W 4800lm 4000K 1195x295	124
205833	Panel Backlit 34W 4760lm 4000K 595x595	124
205864	Panel Backlit 34W 4760lm 4000K UGR<19 595x595 0-10V	124
203457	Panel Backlit 42W 6300lm 4000K UGR<19 595x595	124
206519	Panel Backlit 34W 4760lm 4000K UGR<19 1195x295	124
206526	Panel Backlit 34W 4760lm 4000K UGR<19 1195x295 0-10V	124
201255	Panel Backlit 28W 4000lm 4000K 595x595 -AW3HATemergency module 3h and AUTOTEST	125
200180	Panel Backlit 40W 4000lm 4000K 595x595 -AW3HATemergency module 3h and AUTOTEST	125

Symbol	N a zwa	Page
204522	Panel Backlit 34W 4760lm 4000K UGR<19 620x620	125
204539	Panel Backlit 34W CCT 4760lm UGR<19 620x620	125
202887	Panel Backlit 40W 4000K 4000lm 595x595	126
203921	Panel Backlit 2in1 40W 595x595 LITE white	126
203938	Panel Backlit 2in1 40W 595x595 LITE black	126
205598	Panel Backlit 2in1 40W 620x620 LITE white	127
205604	Panel Backlit 2in1 40W 620x620 LITE black	127
203945	Panel Backlit 2in1 40W 295x1195 LITE white	127
203952	Panel Backlit 2in1 40W 295x1195 LITE black	127
209787	Surface mounting frame SKYFRAME 600x600 H70	130
209763	Surface mounting frame PRIME 600x600 H70	130
209770	Surface mounting frame PRIME 1200x300 H70	130
209756	Surface mounting frame LITE 600x600 H62	130
201347	Spring holders for Backlit panels	131
245725	Springs for SLIM Panel, 2in1 Panels, Frame Panel and DIORA	131
245718	Hooks for panels	131
245701	Suspension wires	131

CEILING LAMPS

Symbol	Nazwa	Page
470577-II	Ceiling lamp LUNAR 16W 1600lm 4000K IP65	135
470584-II	Ceiling lamp LUNAR 16W 1600lm 4000K IP65 motion sensor	135
470591-II	Ceiling lamp LUNAR 22W 2200lm 4000K IP65	135
470607-II	Ceiling lamp LUNAR 22W 2200lm 4000K IP65 motion sensor	135
201095	Ceiling lamp ACTON 18W 1900lm 3000K IP54 round	139
201101	Ceiling lamp ACTON 18W 1900lm 3000K IP54 round motion sensor	139
201118	Ceiling lamp ACTON 18W 2000lm 4000K IP54 round	139
201125	Ceiling lamp ACTON 18W 2000lm 4000K IP54 round motion sensor	139
201132	Ceiling lamp ACTON 24W 2600lm 4000K IP54 round	139
201149	Ceiling lamp ACTON 24W 2600lm 4000K IP54 round motion sensor	139
201156	Ceiling lamp ACTON 18W 1900lm 3000K IP54 square	141
201163	Ceiling lamp ACTON 18W 1900lm 3000K IP54 square motion sensor	141
201170	Ceiling lamp ACTON 18W 2000lm 4000K IP54 square	141
201187	Ceiling lamp ACTON 18W 2000lm 4000K IP54 square motion sensor	141
201354	Ceiling lamp ACTON 18W 2000lm 4000K IP54 square motion sensor	141
201361	Ceiling lamp PLAFON IP44 12W 900lm 3000K	141
201378	Ceiling lamp PLAFON IP44 12W 900lm 3000K motion sensor	141
201385	Ceiling lamp PLAFON IP44 12W 960lm 4000K	141
201392	Ceiling lamp PLAFON IP44 12W 960lm 4000K motion sensor	141
201408	Ceiling lamp PLAFON IP44 18W 1450lm 3000K	
201415	Ceiling lamp PLAFON IP44 18W 1450lm 3000K motion sensor	
201422	Ceiling lamp PLAFON IP44 18W 1550lm 4000K	
201439	Ceiling lamp PLAFON IP44 18W 1550lm 4000K motion sensor	
201446	Ceiling lamp PLAFON IP44 24W 1950lm 4000K	
245497	Ceiling lamp PLAFON IP44 24W 1950lm 4000K motion sensor	
	Ceiling lamp BULKHEAD 12W 840lm 4000K	

DOWNLIGHTS


Symbol	N a zwa	Page
202122	Downlight CALMOS 18W 2100lm 4000K IP44	143
202139	Downlight CALMOS 24W 2800lm 4000K IP44	143
209923	Downlight EASY FLEX 6W CCT round white	147
209930	Downlight EASY FLEX 12W CCT round white	147
209947	Downlight EASY FLEX 18-21-24W CCT round white	147
209961	Downlight EASY FLEX 18-21-24W CCT round black	147
209961	Downlight EASY FLEX 18W CCT round white	147
209978	Downlight EASY FLEX 18W CCT round white motion sensor	147
210004	Downlight EASY FLEX 18-21-24W CCT round white	147
210011	Downlight EASY FLEX 18-21-24W CCT round black	147

Symbol	Nazwa	Page
209985	Downlight EASY FLEX 24W CCT round white	147
209992	Downlight EASY FLEX 24W CCT round white motion sensor	147
210028	Downlight EASY FLEX 45W CCT round white	147
210035	Downlight EASY FLEX 70W CCT round white	147
210103	Downlight EASY FLEX 12-15-18W CCT square white	148
210110	Downlight EASY FLEX 12-15-18W CCT square black	148
210127	Downlight EASY FLEX 18-21-24W CCT square white	148
210134	Downlight EASY FLEX 18-21-24W CCT square black	148
210042	Downlight EASY FLEX 20-50cm ceiling bracket white	149
210059	Downlight EASY FLEX 50-100cm ceiling bracket white	149
210066	Downlight EASY FLEX 20-50cm ceiling bracket black	149
210073	Downlight EASY FLEX 50-100cm ceiling bracket black	149
212237	Downlight EASY FLEX 120cm suspension kit white	149
210134	Downlight EASY FLEX 18-21-24W CCT square black	149
202825	Downlight EASY FIX PRO 6W 540lm CCT round	153
202832	Downlight EASY FIX PRO 12W 1080lm CCT round	153
202849	Downlight EASY FIX PRO 18W 1800lm CCT round	153
202863	Downlight EASY FIX PRO 18W 1800lm CCT square	153
202856	Downlight EASY FIX PRO 24W 2400lm CCT round	153
202870	Downlight EASY FIX PRO 24W 2400lm CCT square	153
248771	Downlight EASY FIX 6W 450lm 2700K round	156
248788	Downlight EASY FIX 6W 470lm 4000K round	156
248818	Downlight EASY FIX 18W 1570lm 2700K round	156
248825	Downlight EASY FIX 18W 1650lm 4000K round	156
248832	Downlight EASY FIX 24W 2200lm 2700K round	156
248849	Downlight EASY FIX 24W 2300lm 4000K round	156
246777	Downlight EASY FIX 6W 450lm 2700K square	156
246784	Downlight EASY FIX 6W 470lm 4000K square	157
246791	Downlight EASY FIX 12W 850lm 2700K square	157
246890	Downlight EASY FIX 12W 890lm 4000K square	157
249457	Downlight EASY FIX 18W 1300lm 2700K square	157
249464	Downlight EASY FIX 18W 1450lm 4000K square	157
249471	Downlight EASY FIX 24W 2150lm 2700K square	157
249488	Downlight EASY FIX 24W 2300lm 4000K square	157
200739	Downlight MOLLY 5W 450lm 3000K round	161
200746	Downlight MOLLY 5W 500lm 4000K round	161
201033	Downlight MOLLY 5W 450lm 3000K square	161
201040	Downlight MOLLY 5W 500lm 4000K square	161
200753	Downlight MOLLY 9W 830lm 3000K round	161
200760	Downlight MOLLY 9W 900lm 4000K round	161
200838	Downlight MOLLY 9W 830lm 3000K square	161
200845	Downlight MOLLY 9W 900lm 4000K square	161
200777	Downlight MOLLY 12W 1150lm 3000K round	161
200784	Downlight MOLLY 12W 1250lm 4000K round	161
200852	Downlight MOLLY 12W 1150lm 3000K square	161
200869	Downlight MOLLY 12W 1250lm 4000K square	161
200791	Downlight MOLLY 18W 1750lm 3000K round	162
200807	Downlight MOLLY 18W 1900lm 4000K round	162
200999	Downlight MOLLY 18W 1900lm CCT 3000-4000-6000K round	162
201019	Downlight MOLLY 18W 1900lm 4000K round motion sensor	162
200876	Downlight MOLLY 18W 1750lm 3000K square	162
200883	Downlight MOLLY 18W 1900lm 4000K square	162
200814	Downlight MOLLY 24W 2350lm 3000K round	162
200821	Downlight MOLLY 24W 2550lm 4000K round	162
201002	Downlight MOLLY 24W 2550lm CCT 3000-4000-6000K round	162
201026	Downlight MOLLY 24W 2550lm 4000K round motion sensor	162
200890	Downlight MOLLY 24W 2550lm 3000K square	163
200906	Downlight MOLLY 24W 2550lm 4000K square	163
200913	Frame for surface mounting of Downlight MOLLY 9W round	163
200920	Frame for surface mounting of Downlight MOLLY 12W round	163
200937	Frame for surface mounting of Downlight MOLLY 18W round	163

Symbol	Nazwa	Page
200944	Frame for surface mounting of Downlight MOLLY 24W round	163
200951	Frame for surface mounting of Downlight MOLLY 9W square	163
200968	Frame for surface mounting of Downlight MOLLY 12W square	163
200975	Frame for surface mounting of Downlight MOLLY 18W square	163
200982	Downlight FRAMELESS panel 8W 800lm 2700K	163
470614	Downlight FRAMELESS panel 8W 800lm 2700K	165
470621	Downlight FRAMELESS panel 8W 800lm 4000K	165
470638	Downlight FRAMELESS 18W 1800lm 2700K	165
470645	Downlight FRAMELESS 18W 1800lm 4000K	165

LINEAR LAMPS

Symbol	Nazwa	Page
475466	Linear lamp FUSION 20W 2600lm 4000K PC Cover 120° black	172
475480	Linear lamp FUSION 20W 2600lm 4000K 30°90° black	172
475497	Linear lamp FUSION 20W 2600lm 4000K 60°110° black	172
475503	Linear lamp FUSION 20W 2600lm 4000K 90°110° black	172
475602	Linear lamp FUSION 20W 2600lm 4000K 120°120° black	172
475619	Linear lamp FUSION 20W 2600lm 4000K LR40 black	172
475626	Linear lamp FUSION 20W 2600lm 4000K P18 black	172
475633	Linear lamp FUSION 20W 2600lm 4000K 0-10V PC Cover 120° black	172
475640	Linear lamp FUSION 20W 2600lm 4000K 0-10V 30°90° black	172
475657	Linear lamp FUSION 20W 2600lm 4000K 0-10V 60°110° black	172
475664	Linear lamp FUSION 20W 2600lm 4000K 0-10V 90°110° black	172
475701	Linear lamp FUSION 20W 2600lm 4000K 0-10V 120°120° black	172
475718	Linear lamp FUSION 20W 2600lm 4000K 0-10V LR40 black	173
475725	Linear lamp FUSION 20W 2600lm 4000K 0-10V P18 black	173
475732	Linear lamp FUSION 40W 5200lm 4000K PC Cover 120° black	173
475749	Linear lamp FUSION 40W 5200lm 4000K 30°90° black	173
475756	Linear lamp FUSION 40W 5200lm 4000K 60°110° black	173
475763	Linear lamp FUSION 40W 5200lm 4000K 90°110° black	173
475800	Linear lamp FUSION 40W 5200lm 4000K 120°120° black	173
475817	Linear lamp FUSION 40W 5200lm 4000K LR40 black	173
475824	Linear lamp FUSION 40W 5200lm 4000K P18 black	173
475831	Linear lamp FUSION 40W 5200lm 4000K 0-10V PC Cover 120° black	173
475848	Linear lamp FUSION 40W 5200lm 4000K 0-10V 30°90° black	173
475855	Linear lamp FUSION 40W 5200lm 4000K 0-10V 60°110° black	173
475862	Linear lamp FUSION 40W 5200lm 4000K 0-10V 90°110° black	173
475909	Linear lamp FUSION 40W 5200lm 4000K 0-10V 120°120° black	173
475916	Linear lamp FUSION 40W 5200lm 4000K 0-10V LR40 black	173
475923	Linear lamp FUSION 40W 5200lm 4000K 0-10V P18 black	173
475930	Linear lamp FUSION 60W 7800lm 4000K PC Cover 120° black	173
475947	Linear lamp FUSION 60W 7800lm 4000K 30°90° black	173
475954	Linear lamp FUSION 60W 7800lm 4000K 60°110° black	173
475961	Linear lamp FUSION 60W 7800lm 4000K 90°110° black	173
476012	Linear lamp FUSION 60W 7800lm 4000K 120°120° black	173
476029	Linear lamp FUSION 60W 7800lm 4000K LR40 black	173
478962	Linear lamp FUSION 60W 7800lm 4000K LR40 black	173
478979	Linear lamp FUSION 60W 7800lm 4000K P18 black	173
478986	Linear lamp FUSION 60W 7800lm 4000K 0-10V PC Cover 120° black	174
478993	Linear lamp FUSION 60W 7800lm 4000K 0-10V 30°90° black	174
479006	Linear lamp FUSION 60W 7800lm 4000K 0-10V 60°110° black	174
479662	Linear lamp FUSION 60W 7800lm 4000K 0-10V 90°110° black	174
479679	Linear lamp FUSION 60W 7800lm 4000K 0-10V 120°120° black	174
479686	Linear lamp FUSION 60W 7800lm 4000K 0-10V LR40 black	174
203259	Linear lamp FUSION 60W 7800lm 4000K 0-10V P18 black	174
	Linear lamp FUSION 20W 2600lm 4000K PC Cover 120° white	



Symbol	Nazwa	Page
203983	Linear lamp FUSION 20W 2600lm 4000K 30°90° white	174
203990	Linear lamp FUSION 20W 2600lm 4000K 60°110° white	174
204003	Linear lamp FUSION 20W 2600lm 4000K 90°110° white	174
204010	Linear lamp FUSION 20W 2600lm 4000K 120°120° white	174
204027	Linear lamp FUSION 20W 2600lm 4000K LR40 white	174
204034	Linear lamp FUSION 20W 2600lm 4000K P18 white	174
204041	Linear lamp FUSION 20W 2600lm 4000K 0-10V PC Cover 120° white	174
204508	Linear lamp FUSION 20W 2600lm 4000K 0-10V 30°90° white	174
204058	Linear lamp FUSION 20W 2600lm 4000K 0-10V 60°110° white	174
204065	Linear lamp FUSION 20W 2600lm 4000K 0-10V 90°110° white	174
204072	Linear lamp FUSION 20W 2600lm 4000K 0-10V 120°120° white	174
204089	Linear lamp FUSION 20W 2600lm 4000K 0-10V LR40 white	175
204096	Linear lamp FUSION 20W 2600lm 4000K 0-10V P18 white	175
203266	Linear lamp FUSION 40W 5200lm 4000K 120° white	175
204102	Linear lamp FUSION 40W 5200lm 4000K 30°90° white	175
204119	Linear lamp FUSION 40W 5200lm 4000K 60°110° white	175
204126	Linear lamp FUSION 40W 5200lm 4000K 90°110° white	175
204133	Linear lamp FUSION 40W 5200lm 4000K 120°120° white	175
204140	Linear lamp FUSION 40W 5200lm 4000K LR40 white	175
204157	Linear lamp FUSION 40W 5200lm 4000K P18 white	175
205574	Linear lamp FUSION 40W 5200lm 4000K 0-10V PC Cover 120° white	175
204164	Linear lamp FUSION 40W 5200lm 4000K 0-10V 30°90° white	175
204171	Linear lamp FUSION 40W 5200lm 4000K 0-10V 60°110° white	175
204188	Linear lamp FUSION 40W 5200lm 4000K 0-10V 90°110° white	175
204195	Linear lamp FUSION 40W 5200lm 4000K 0-10V 120°120° white	175
204201	Linear lamp FUSION 40W 5200lm 4000K 0-10V LR40 white	175
204218	Linear lamp FUSION 40W 5200lm 4000K 0-10V P18 white	175
203273	Linear lamp FUSION 60W 7800lm 4000K PC Cover 120° white	175
204225	Linear lamp FUSION 60W 7800lm 4000K 30°90° white	175
204232	Linear lamp FUSION 60W 7800lm 4000K 60°110° white	175
204249	Linear lamp FUSION 60W 7800lm 4000K 90°110° white	175
204256	Linear lamp FUSION 60W 7800lm 4000K 120°120° white	175
204263	Linear lamp FUSION 60W 7800lm 4000K LR40 white	175
204270	Linear lamp FUSION 60W 7800lm 4000K P18 white	175
205581	Linear lamp FUSION 60W 7800lm 4000K 0-10V PC Cover 120° white	175
204287	Linear lamp FUSION 60W 7800lm 4000K 0-10V 30°90° white	176
204294	Linear lamp FUSION 60W 7800lm 4000K 0-10V 60°110° white	176
204300	Linear lamp FUSION 60W 7800lm 4000K 0-10V 90°110° white	176
204317	Linear lamp FUSION 60W 7800lm 4000K 0-10V 120°120° white	176
204324	Linear lamp FUSION 60W 7800lm 4000K 0-10V LR40 white	176
204331	Linear lamp FUSION 60W 7800lm 4000K 0-10V P18 white	176
203587	FUSION ANTI GLARE SHIELD UGR<19 black	176
479709	FUSION ANTI GLARE SHIELD UGR<19 white	176
202894	FUSION ADJUSTABLE CONNECTOR black	
203426	FUSION ADJUSTABLE CONNECTOR black 1-10V	
203433	FUSION ADJUSTABLE CONNECTOR white	
204553	FUSION ADJUSTABLE CONNECTOR white 1-10V	
204560	FUSION L CONNECTOR black	
	FUSION L CONNECTOR white	

TRACK LIGHTS

Symbol	N a zwa	Page
207813	Linear lamp EXECULINE 30W 4000K 3750lm black	181
207806	Linear lamp EXECULINE 30W 4000K 3900lm white	181
210486	Track light LUMICANTO 14-29W CCT 36/60° black PRIME	191
210516	Track light LUMICANTO 14-29W CCT 36/60° white PRIME	191
210493	Track light LUMICANTO 6-20W CCT 36/60° black PRIME	191
210523	Track light LUMICANTO 6-20W CCT 36/60° white PRIME	191
210509	Track light LUMICANTO 12-42W CCT 36/60° black PRIME	191

Symbol	N a zwa	Page
210530	Track light LUMICANTO 12-42W CCT 36/60° white PRIME	191
210899	Track light LUMICANTO GU10 black PRIME	191
210905	Track light LUMICANTO GU10 white PRIME	191
210578	3-Circuit rail for LUMICANTO 1m black	192
210547	3-Circuit rail for LUMICANTO 1m white	192
210585	3-Circuit rail for LUMICANTO 2m black	192
210554	3-Circuit rail for LUMICANTO 2m white	192
210592	3-Circuit rail for LUMICANTO 3m black	192
210561	3-Circuit rail for LUMICANTO 3m white	192
210837	Suspension kit with auto-regulation for LUMICANTO 1,5m black	192
210820	Suspension kit with auto-regulation for LUMICANTO 1,5m white	192
210851	Suspension kit with auto-regulation for LUMICANTO 3m black	192
210844	Suspension kit with auto-regulation for LUMICANTO 3m white	192
210875	Suspension kit with auto-regulation for LUMICANTO 8m black	192
210868	Suspension kit with auto-regulation for LUMICANTO 8m white	192
210790	Flexible Connector for LUMICANTO black	193
210783	Flexible Connector for LUMICANTO white	193
210639	I Connector for LUMICANTO black	193
210622	I Connector for LUMICANTO white	193
210615	Mini I Connector for LUMICANTO black	193
210608	Mini I Connector for LUMICANTO white	193
210653	Left L Connector for LUMICANTO black	193
210646	Left L Connector for LUMICANTO white	193
210714	Right L Connector for LUMICANTO black	193
210707	Right L Connector for LUMICANTO white	193
210660	Left T Connector for LUMICANTO black	193
210677	Left T Connector for LUMICANTO white	193
210738	Right T Connector for LUMICANTO black	193
210721	Right T Connector for LUMICANTO white	193
210691	X Connector for LUMICANTO black	194
210684	X Connector for LUMICANTO white	194
210776	Left Power Supply Connector for LUMICANTO black	194
210769	Left Power Supply Connector for LUMICANTO white	194
210752	Right Power Supply Connector for LUMICANTO black	194
210745	Right Power Supply Connector for LUMICANTO white	194
210806	End Cap for LUMICANTO black	194
210813	End Cap for LUMICANTO white	194
478252	Luminaire for single-phase track GU10 black PIPE	197
475442	Luminaire for single-phase track GU10 white PIPE	197
478276	Surface mounted luminaire GU10 black PIPE	197
478283	Surface mounted luminaire GU10 white PIPE	197
478290	Pendant luminaire GU10 black PIPE	197
478306	Pendant luminaire GU10 white PIPE	197

LED STRIPS

Symbol	N a zwa	LED strip	320 COB	24V	Page
211032	3000K 5W	LED strip	320 COB	24V	201
211049	4000K 5W	LED strip	320 COB	24V	201
211056	6500K 5W	LED strip	320 COB	24V	201
211094	3000K 5W	30m LED strip	320 COB		201
211100	24V 4000K 5W	30m LED strip	320		201
211117	COB 24V 6500K 5W	30m LED strip			201
476821	320 COB 24V 2700K 8W	LED strip	320		201
476838	COB 24V 4000K 8W	LED strip	320		201
476845	COB 24V 6500K 8W	LED strip	320		201
479754	COB 24V 2700K 8W	30m LED strip			201
479761	320 COB 24V 4000K 8W	30m LED			201
479778	strip 320 COB 24V 6500K 8W	30m			201
479785	LED strip 480 COB 24V 2700K	11W			201
479792	LED strip 480 COB 24V 4000K	11W			201

Symbol	N a zwa	Page
479808	LED strip 480 COB 24V 6500K 11W	201
200005	LED strip 480 COB 24V 2700K 11W 30m	201
200012	LED strip 480 COB 24V 4000K 11W 30m	201
200029	LED strip 480 COB 24V 6500K 11W 30m	201
479846	LED strip 528 COB 24V 2700K 14W	202
479853	LED strip 528 COB 24V 4000K 14W	202
479860	LED strip 528 COB 24V 6500K 14W	202
200036	LED strip 528 COB 24V 2700K 14W 30m	202
200043	LED strip 528 COB 24V 4000K 14W 30m	202
200050	LED strip 528 COB 24V 6500K 14W 30m	202
478245	LED strip 480 COB 24V 2700K 18W	202
478269	LED strip 480 COB 24V 4000K 18W	202
478313	LED strip 480 COB 24V 6500K 18W	202
200098	LED strip 480 COB 24V 2700K 18W 30m	202
200104	LED strip 480 COB 24V 4000K 18W 30m	202
200173	LED strip 840 COB 24V RGBCT 18W	202
479907	LED strip 576 COB 24V RGB 10W	202
479983	LED Strip 144 SMD2835 24V 2700K IP20 6,5W 200lm/W	205
479990	LED Strip 144 SMD2835 24V 4000K IP20 6,5W 200lm/W	205
479945	LED Strip 128 SMD2835 24V 2700K IP20 8,5W 160lm/W	205
479952	LED Strip 128 SMD2835 24V 4000K IP20 8,5W 160lm/W	205
479969	LED Strip 192 SMD2835 24V 2700K IP20 17,5W 160lm/W	205
479976	LED Strip 192 SMD2835 24V 4000K IP20 17,5W 160lm/W	205
243714	LED Strip 300 SMD2835 12V MULTIWHITE IP20 9,6W	205
241819	LED Strip 300 SMD2835 24V MULTIWHITE IP20 9,6W	205
249167	LED strip 600 SMD 12V 4000K 9,6W 5mm WPCB	205
246463	LED strip 300 SMD 12V 2400K 4,8W	207
240164	LED strip 300 SMD 12V 3000K 4,8W	207
249419	LED strip 300 SMD 12V 3000K 4,8W 30m	207
477200	LED strip 300 SMD 12V 3000K 4,8W 50m	207
245602	LED strip 300 SMD 12V 4000K 4,8W	207
249426	LED strip 300 SMD 12V 4000K 4,8W 30m	207
477194	LED strip 300 SMD 12V 4000K 4,8W 50m	207
240188	LED strip 300 SMD 12V 6500K 4,8W	207
249433	LED strip 300 SMD 12V 6500K 4,8W 30m	207
477217	LED strip 300 SMD 12V 6500K 4,8W 50m	207
240195	LED strip 300 SMD 12V 11000K 4,8W	207
249440	LED strip 300 SMD 12V 11000K 4,8W 30m	207
240645	LED strip 300 SMD 24V 3000K 4,8W	207
241758	LED strip 300 SMD 24V 3000K 4,8W 30m	207
240652	LED strip 300 SMD 24V 4000K 4,8W	207
241765	LED strip 300 SMD 24V 4000K 4,8W 30m	207
240676	LED strip 300 SMD 24V 6500K 4,8W	207
241789	LED strip 300 SMD 24V 6500K 4,8W 30m	207
240690	LED strip 300 SMD 24V 11000K 4,8W	207
241796	LED strip 300 SMD 24V 11000K 4,8W 30m	207
240201	LED strip 300 SMD 12V red 4,8W	208
240225	LED strip 300 SMD 12V green 4,8W	208
240218	LED strip 300 SMD 12V blue 4,8W	208
240232	LED strip 300 SMD 12V yellow 4,8W	208
477132	LED strip 600 SMD 12V 2700K 9,6W	208
477262	LED strip 600 SMD 12V 2700K 9,6W 30m	208
477149	LED strip 600 SMD 12V 4000K 9,6W 5m	208
477279	LED strip 600 SMD 12V 4000K 9,6W 30m	208
477156	LED strip 600 SMD 12V 6500K 9,6W 5m	208
477118	LED strip 600 SMD 12V 11000K 9,6W 5m	208
240140	LED strip 150 SMD 12V RGB 7,2W	209
240522	LED strip 300 SMD 12V RGB 14,4W	209
477255	LED strip 300 SMD 12V RGB 14,4W 30m	209
247071	LED strip 300 SMD 12V 2700K RGBW 19,2W	209
477231	LED strip 300 SMD 12V 2700K RGBW 19,2W 30m	209
477309	LED strip 300 SMD 12V 4000K RGBW 19,2W	209
245657	LED strip 300 SMD 12V 6500K RGBW 19,2W	209

Symbol	Nazwa	Page
477248	LED strip 300 SMD 12V 6500K RGBW 19,2W 30m	209
241673	LED strip 300 SMD 24V 2700K RGBW 19,2W	209
477316	LED strip 300 SMD 24V 4000K RGBW 19,2W	209
241680	LED strip 300 SMD 24V 6500K RGBW 19,2W	209
211063	LED strip 320 COB 24V 2700K 5W IP66	213
211070	LED strip 320 COB 24V 4000K 5W IP66	213
211087	LED strip 320 COB 24V 6500K 5W IP66	213
479723	LED strip 320 COB 24V 2700K 8W IP66	213
479730	LED strip 320 COB 24V 4000K 8W IP66	213
479747	LED strip 320 COB 24V 6500K 8W IP66	213
479815	LED strip 480 COB 24V 2700K 11W IP66	213
479822	LED strip 480 COB 24V 4000K 11W IP66	213
479839	LED strip 480 COB 24V 6500K 11W IP66	213
479877	LED strip 528 COB 24V 2700K 14W IP66	213
479884	LED strip 528 COB 24V 4000K 14W IP66	213
479891	LED strip 528 COB 24V 6500K 14W IP66	213
479914	LED Strip 576 COB 24V RGB 10W IP66	213
240249	LED strip 300 SMD 12V 3000K 4,8W IP65	214
245619	LED strip 300 SMD 12V 4000K 4,8W IP65	214
240256	LED strip 300 SMD 12V 6500K 4,8W IP65	214
240263	LED strip 300 SMD 12V 11000K 4,8W IP65	214
240713	LED strip 300 SMD 24V 3000K 4,8W IP65	214
240720	LED strip 300 SMD 24V 4000K 4,8W IP65	214
240744	LED strip 300 SMD 24V 6500K 4,8W IP65	214
241147	LED strip 300 SMD 24V 11000K 4,8W IP65	214
241468	LED strip 300 SMD 12V 3000K 4,8W IP67	214
245626	LED strip 300 SMD 12V 4000K 4,8W IP67	214
240294	LED strip 300 SMD 12V green 4,8W IP65	215
240287	LED strip 300 SMD 12V blue 4,8W IP65	215
471345	LED strip 600 SMD 12V 2700K 9,6W IP65	215
477040	LED strip 600 SMD 12V 4000K 9,6W IP65	215
477057	LED strip 600 SMD 12V 6500K 9,6W IP65	215
240157	LED strip 150 SMD 12V RGB 7,2W IP65	215
240614	LED strip 300 SMD 12V RGB 14,4W IP65	215
241741	LED strip 300 SMD 24V RGB 14,4W IP65	215
478351	COB Strip CLICK CONNECTOR single with wire 10 mm 2 PIN	220
478368	COB Strip CLICK CONNECTOR double 10 mm 2 PIN with a cable	220
202481	COB strip CLICK CONNECTOR single with wire 8 mm 2 PIN	221
200456	COB LED Strip connector angular 2700K 8mm 2 PIN Type L 8W	
200463	COB LED Strip connector angular 4000K 8mm 2 PIN Type L 8W	221
	COB LED Strip connector angular 6500K 8mm 2 PIN Type L 8W	
200470	COB LED Strip connector angular 2700K 10mm 2 PIN Type L 14W	221
200487	COB LED Strip connector angular 2700K 8mm 2 PIN Type L 11W	221
200494	COB LED Strip connector angular 4000K 8mm 2 PIN Type L 11W	221
200500	COB LED Strip connector angular 6500K 8mm 2 PIN Type L 11W	221
200517	COB LED Strip connector angular 2700K 10mm 2 PIN Type L 14W	221
200524	COB LED Strip connector angular 4000K 10mm 2 PIN Type L 14W	221
200531	COB LED Strip connector angular 6500K 10mm 2 PIN Type L 14W	221
478412	COB Strip CLICK CONNECTOR angular 2700K 10 mm 2 PIN Type L 18W	221
478429	COB Strip CLICK CONNECTOR angular 4000K 10 mm 2 PIN Type L 18W	221
478436	COB Strip CLICK CONNECTOR angular 6000K 10 mm 2 PIN Type L 18W	222
200609	COB Strip CLICK CONNECTOR double 8mm 2 PIN	222
200616	COB Strip CLICK CONNECTOR double 10mm 2 PIN	222
200548	COB Strip CLICK CONNECTOR double 10mm 2 PIN	222
200555	COB Strip CLICK CONNECTOR double 8mm 2 PIN type L	222
200623	COB Strip CLICK CONNECTOR double 10mm 2 PIN type L	222
246555	COB RGB Strip CLICK CONNECTOR double 10mm 4 PIN	222
246524	COB Strip CLICK CONNECTOR angular 8 mm 2 PIN Type T	
	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type T RGB	
	PRODUCT INDEX	

Symbol	N a zwa	Page
246517	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type L RGB	223
246548	COB Strip CLICK CONNECTOR angular 8 mm 2 PIN Type +	223
246531	COB Strip CLICK CONNECTOR angular 10 mm 4 PIN Type + RGB	223
247859	COB Strip CLICK CONNECTOR angular 12 mm 5 PIN Type + RGBW	223
200586	Strip mounting clip 8mm	223
200593	Strip mounting clip 10mm	223
200562	Strip mounting bracket 8mm	223
200579	Strip mounting bracket 10mm	223

LED CONTROLLERS

Symbol	Nazwa	Page
471321	REMOTE for VARIANTE Controller DIM/CCT	225
471338	RF REMOTE for VARIANTE Controller RGB/RGBW	225
476937	RF MAG JOY REMOTE for VARIANTE Controller DIM/CCT	225
201200	WALL RF REMOTE for VARIANTE Controller DIM/CCT	225
201217	WALL RF REMOTE for VARIANTE Controller RGB	225
201224	RF REMOTE for VARIANTE Controller RGBW/RGBCCT	225
203600	Remote for a LED WIFI TUYA VARIANTE DIM/CCT/1-10V controller	227
477781	VARIANTE LED Controller RF WIFI TUYA 5in1	227
201286	VARIANTE LED Controller RF SPI DIGITAL	227
471277	VARIANTE LED Controller RF WIFI TUYA DIM	227
471284	VARIANTE LED Controller RF WIFI TUYA CCT	227
471291	VARIANTE LED Controller RF WIFI TUYA RGB	227
471307	VARIANTE LED Controller RF WIFI TUYA RGBW	227
201231	VARIANTE LED Controller RF WIFI TUYA RGBCCT	227
471314	VARIANTE LED Controller RF RGB/RGBW + remote controller	

LED DRIVERS

Symbol	LL-12-12	LL-12-24	LL-20-12	LL-20-24	Nazwa	Page
20-24	Power supply 20W IP67 12V	Power supply 24W IP67 12V	Power supply 20W IP67 12V	Power supply 24W IP67 12V		229
						229
						229
						229
LL-35-12	Power supply 35W IP67 12V	Power supply 30W IP67 12V	Power supply 35W IP67 12V	Power supply 30W IP67 12V		229
24	Power supply 24W IP67 12V	Power supply 30W IP67 12V	Power supply 24W IP67 12V	Power supply 30W IP67 12V		229
						229
						229
LL-60-12	Power supply 60W IP67 12V	Power supply 60W IP67 12V	Power supply 60W IP67 12V	Power supply 60W IP67 12V		229
LL-60-24	Power supply 60W IP67 24V	Power supply 60W IP67 24V	Power supply 60W IP67 24V	Power supply 60W IP67 24V		229
LL-75-12	Power supply 75W IP67 12V	Power supply 75W IP67 12V	Power supply 75W IP67 12V	Power supply 75W IP67 12V		229
LL-75-24	Power supply 75W IP67 24V	Power supply 75W IP67 24V	Power supply 75W IP67 24V	Power supply 75W IP67 24V		229
LL-100-12	Power supply 100W IP67 12V	Power supply 100W IP67 12V	Power supply 100W IP67 12V	Power supply 100W IP67 12V		229
LL-100-24	Power supply 100W IP67 24V	Power supply 100W IP67 24V	Power supply 100W IP67 24V	Power supply 100W IP67 24V		229
LL-150-12	Power supply 150W IP67 12V	Power supply 150W IP67 12V	Power supply 150W IP67 12V	Power supply 150W IP67 12V		229
LL-150-24	Power supply 150W IP67 24V	Power supply 150W IP67 24V	Power supply 150W IP67 24V	Power supply 150W IP67 24V		229
LL-200-12	Power supply 200W IP67 12V	Power supply 200W IP67 12V	Power supply 200W IP67 12V	Power supply 200W IP67 12V		229
LL-200-24	Power supply 200W IP67 24V	Power supply 200W IP67 24V	Power supply 200W IP67 24V	Power supply 200W IP67 24V		229
477965	LED Master Sensor Hand Motion On/Off	LED Master Sensor Hand Motion On/Off	LED Master Sensor Hand Motion On/Off	LED Master Sensor Hand Motion On/Off		232
478009	LED Channel Sensor Hand Motion On/Off	LED Channel Sensor Hand Motion On/Off	LED Channel Sensor Hand Motion On/Off	LED Channel Sensor Hand Motion On/Off		232
477972	LED Master Sensor IR Door	LED Master Sensor IR Door	LED Master Sensor IR Door	LED Master Sensor IR Door		232
478016	LED Channel Sensor IR Door	LED Channel Sensor IR Door	LED Channel Sensor IR Door	LED Channel Sensor IR Door		232
477989	LED Master Sensor PIR	LED Master Sensor PIR	LED Master Sensor PIR	LED Master Sensor PIR		232
478023	LED Channel Sensor PIR	LED Channel Sensor PIR	LED Channel Sensor PIR	LED Channel Sensor PIR		232
477958	LED Master Sensor Touch On/Off Dimmer	LED Master Sensor Touch On/Off Dimmer	LED Master Sensor Touch On/Off Dimmer	LED Master Sensor Touch On/Off Dimmer		232
477996	LED Channel Sensor Touch On/Off Dimmer	LED Channel Sensor Touch On/Off Dimmer	LED Channel Sensor Touch On/Off Dimmer	LED Channel Sensor Touch On/Off Dimmer		232
477736	LED Multipower 60-12 5A 60W 12V IP20	LED Multipower 60-12 5A 60W 12V IP20	LED Multipower 60-12 5A 60W 12V IP20	LED Multipower 60-12 5A 60W 12V IP20		233
477743	Multipower 100-12 8,3A 100W 12V IP20	Multipower 100-12 8,3A 100W 12V IP20	Multipower 100-12 8,3A 100W 12V IP20	Multipower 100-12 8,3A 100W 12V IP20		233
477934	Multipower LED wire 2m	Multipower LED wire 2m	Multipower LED wire 2m	Multipower LED wire 2m		233
477927	Multipower Extension Wire 2m	Multipower Extension Wire 2m	Multipower Extension Wire 2m	Multipower Extension Wire 2m		233
477941	LED Multipower Splitter 6 ports	LED Multipower Splitter 6 ports	LED Multipower Splitter 6 ports	LED Multipower Splitter 6 ports		233

Symbol	N a zwa	Page
203617	LED Surface Profile 10mm anodized 2000 mm with milky cover	235
203624	LED Surface Profile 10mm white 2000 mm with milky cover	235
203631	LED Surface Profile 10mm black 2000 mm with milky cover	235
203648	LED Corner Profile 10mm anodized 2000 mm with milky cover	235
203655	LED Corner Profile 10mm white 2000 mm with milky cover	235
203662	LED Corner Profile 10mm black 2000 mm with milky cover	235
203679	LED Recessed Profile 10mm anodized 2000 mm with milky cover	235
203686	LED Recessed Profile 10mm white 2000 mm with milky cover	235
203693	LED Recessed Profile 10mm black 2000 mm with milky cover	235

LED LIGHT SOURCES

Symbol	Nazwa	Page
201606	LED light source E14 5W 700lm 2700K 170-250V C37	239
209640	Candle LED light source E14 5W 700lm 3000K 170-250V	239
201613	C37 Candle LED light source E14 5W 700lm 4000K 170-	239
201620	250V C37 Candle LED light source E14 5W 700lm 6500K	239
247576-II	LED light source E14 7W 1000lm 2700K 170-250V C37 Candle	239
209664	LED light source E14 7W 1000lm 3000K 170-250V C37 Candle	239
247583-II	LED light source E14 7W 1000lm 4000K 170-250V C37 Candle	239
201651	LED light source E14 7W 1000lm 6500K 170-250V C37 Candle	239
248610-II	LED light source E14 9W 1260lm 2700K 170-250V C37 Candle	239
209671	LED light source E14 9W 1260lm 3000K 170-250V C37 Candle	239
248627-II	LED light source E14 9W 1260lm 4000K 170-250V C37 Candle	239
201682	LED light source E14 9W 1260lm 6500K 170-250V C37 Candle	239
470232-II	LED light source E14 9W 1260lm 2700K 170-250V C37 Candle DIMMABLE	239
209688	LED light source E14 9W 1260lm 3000K 170-250V C37 Candle DIMMABLE	239
470249-II	LED light source E14 9W 1260lm 4000K 170-250V C37 Candle DIMMABLE	239
247590-II	LED light source E14 7W 1000lm 2700K 170-250V G45 Globe	240
209695	LED light source E14 7W 1000lm 3000K 170-250V G45 Globe	240
247591-II	LED light source E14 7W 1000lm 4000K 170-250V G45 Globe	240
247592-II	LED light source E14 7W 1000lm 6500K 170-250V G45 Globe	240
247590-II	LED light source E27 7W 1000lm 2700K 170-250V G45 Globe	240
209695	LED light source E27 7W 1000lm 3000K 170-250V G45 Globe	240
247606-II	LED light source E27 7W 1000lm 4000K 170-250V G45 Globe	240
201774	LED light source E27 7W 1000lm 6500K 170-250V G45 Globe	240
201781	LED light source E27 6W 840lm 2700K 170-250V A60	240
201798	LED light source E27 6W 840lm 4000K 170-250V A60	240
201804	LED light source E27 6W 840lm 6500K 170-250V A60	240
241734-II	LED light source E27 13W 1820lm 2700K 170-250V A60	240
241772-II	LED light source E27 13W 1820lm 4000K 170-250V A60	240
201453	LED light source GU10 5W 700lm 2700K 170-250V	241
201460	LED light source GU10 5W 700lm 4000K 170-250V	241
201477	LED light source GU10 5W 700lm 6500K 170-250V	241
247613-II	LED light source GU10 7W 1000lm 2700K 170-250V	241
209626	LED light source GU10 7W 1000lm 3000K 170-250V	241
247620-II	LED light source GU10 7W 1000lm 4000K 170-250V	241
240737-II	LED light source GU10 7W 1000lm 6500K 170-250V	241
470218-II	LED light source GU10 10W 2700K 1250lm 170-250V DIM	241
470225-II	LED light source GU10 10W 4000K 1250lm 170-250V DIM	241
248580-II	LED light source GU10 10W 2700K 1400lm 170-250V	241
209633	LED light source GU10 10W 3000K 1400lm 170-250V	241
248597-II	LED light source GU10 10W 4000K 1400lm 170-250V	241
248603-II	LED light source GU10 10W 6500K 1400lm 170-250V	241
248108-II	LED light source CERAMIC GU11 3W 330lm 170-250V 110lm/W	241
248122-II	LED light source CERAMIC GU11 3W 330lm 4000K	241
248115-II	LED light source LED CERAMIC GU11 3W 330lm 6500K	242
248139-II	LED light source CERAMIC MR11 3W 2700K 330lm 10-14V	242
248146-II	LED light source CERAMIC MR11 3W 4000K 330lm 10-14V	242

Symbol	Nazwa	Page
248153-II	LED light source CERAMIC MR11 3W 6500K 330lm 10-14V	242
201903	LED light source CERAMIC MR16 5W 600lm 2700K 10-18V	242
201910	LED light source CERAMIC MR16 5W 600lm 4000K 10-18V	242
201927	LED light source CERAMIC MR16 5W 600lm 6500K 10-18V	242
201934	LED light source CERAMIC MR16 8,5W 1020lm 2700K 10-18V	242
201941	LED light source CERAMIC MR16 8,5W 1020lm 4000K 10-18V	242
201958	LED light source CERAMIC MR16 8,5W 1020lm 6500K 10-18V	242
247286	LED light source SMD 5W 400lm 2700K 220-260V 50mm	242
470720	LED light source SMD 5W 400lm 2700K 220-260V 50mm DIM	242
247293	LED light source SMD 5W 400lm 4000K 220-260V 50mm	242
470737	LED light source SMD 5W 400lm 4000K 220-260V 50mm DIM	242
470560	LED light source SMD 5W 400lm 6500K 220-260V 50mm	242
470744	LED light source SMD 5W 400lm 6500K 220-260V 50mm DIM	243
245480	LED light source G9 4W 350lm 2700K 220-240V	243
209572	LED light source G9 4W 350lm 3000K 220-240V	243
245534	LED light source G9 4W 350lm 4000K 220-240V	243
245541	LED light source G9 4W 350lm 6000K 220-240V	243
245947	LED light source G9 6W 550lm 2700K 220-240V	243
209589	LED light source G9 6W 550lm 3000K 220-240V	243
245954	LED light source G9 6W 550lm 4000K 220-240V	243
245961	LED light source G9 6W 550lm 6000K 220-240V	243
247903	LED light source G9 8W 750lm 2700K 220-240V	243
209596	LED light source G9 8W 750lm 3000K 220-240V	243
247910	LED light source G9 8W 750lm 4000K 220-240V	243
247927	LED light source G9 8W 750lm 6000K 220-240V	243
248900	LED light source G9 12W 1160lm 2700K 220-240V	243
209602	LED light source G9 12W 1160lm 3000K 220-240V	243
248917	LED light source G9 12W 1160lm 4000K 220-240V	246
248924	LED light source G9 12W 1160lm 6000K 220-240V	246
242250	LED light source GU10 1W 80lm 2700K 220-260V	246
209619	LED light source GU10 1W 80lm 3000K 220-260V	246
248337	LED light source GU10 1W 80lm 4000K 220-260V	246
242267	LED light source GU10 1W 80lm 6500K 220-260V	246
242298	LED light source GU10 1W 80lm 220-260V green	246
242281	LED light source GU10 1W 20lm 220-260V green	246
247835	LED light source GU10 1W 20lm 220-260V blue	246
247828	LED light source GLASS GU10 3W 2700K 230V	246
247811	LED light source GLASS GU10 3W 4000K 230V	246
241963	LED light source GLASS GU10 3W 6500K 230V	246
241970	LED light source GU10 5W 450lm 2700K 220-260V 120°	246
241987	LED light source GU10 5W 450lm 4000K 220-260V 120°	247
240621	LED light source GU10 5W 450lm 6500K 220-260V 120°	247
240638	LED light source M16 5,5W 500lm 2700K 220-240V DIM	247
248948	LED light source M16 5,5W 550lm 4000K 220-240V DIM	247
247804	LED light source GU10 5,5W 345lm 2200-3000K 220-240V	247
247798	LED light source MR11 3W 273lm 2700K 10-14V AC/DC 36°	247
247781	LED light source MR11 3W 273lm 4000K 10-14V AC/DC 36°	249
202405	LED light source MR11 3W 273lm 6500K 10-14V AC/DC 36°	
	LED light source FILAMENT E27 4W 210lm 1800K 220-240V ST64 RETRO VINTAGE GOLD DIMMABLE	
	LED light source FILAMENT E27 4W 210lm 1800K 220-240V ST64 RETRO VINTAGE GRAPHITE DIMMABLE	249
202412	LED light source FILAMENT E27 4W 210lm 1800K 220-240V ST64 RETRO VINTAGE DIMMABLE	249
202399	LED light source FILAMENT E27 4W 210lm 1800K 220-240V ST64 RETRO VINTAGE DIMMABLE	249
202375	LED light source FILAMENT E27 4W 210lm 1800K 220-240V G125 RETRO VINTAGE GOLD DIMMABLE	249
202382	LED light source FILAMENT E27 4W 210lm 1800K 220-240V G125 RETRO VINTAGE GRAPHITE DIMMABLE	249
202368	LED light source FILAMENT E27 4W 210lm 1800K 220-240V G125 RETRO VINTAGE DIMMABLE	249
202344	LED light source FILAMENT E27 4W 840lm 4000K 220-240V A60 GLOBE	250
202351	LED light source FILAMENT E27 7W 1470lm 4000K 220-240V A60 GLOBE	250
202269	LED light source FILAMENT E27 7W 840lm 2700K 220-240V A60 GLOBE	250
202276	LED light source FILAMENT E27 7W 840lm 4000K 220-240V A60 GLOBE	250

Symbol	Nazwa	Page
202320	LED light source FILAMENT E27 7W 840lm 2700K 220-240V A60 GLOBE DIMMABLE	250
202337	LED light source FILAMENT E27 7W 840lm 4000K 220-240V A60 GLOBE DIMMABLE	250
202283	LED light source FILAMENT E27 10W 1200lm 2700K 220-240V A60 GLOBE	250
202290	LED light source FILAMENT E27 10W 1200lm 4000K 220-240V A60 GLOBE	250
202221	LED light source FILAMENT E14 4W 480lm 2700K 220-240V G45 GLOBE	251
202238	LED light source FILAMENT E14 4W 480lm 4000K 220-240V G45 GLOBE	251
202184	LED light source FILAMENT E14 4W 480lm 2700K 220-240V C35 CANDLE	251
202191	LED light source FILAMENT E14 4W 480lm 4000K 220-240V C35 CANDLE	251
202207	LED light source FILAMENT E14 6W 720lm 2700K 220-240V C35 CANDLE	251
202214	LED light source FILAMENT E14 6W 720lm 4000K 220-240V C35 CANDLE	251
202306	LED light source FILAMENT E14 5W 600lm 2700K 220-240V C35 CANDLE DIMMABLE	251
202313	LED light source FILAMENT E14 5W 600lm 4000K 220-240V C35 CANDLE DIMMABLE	253
247255	LED light source E27 6W 510lm 3000K 220-260V A60	253
247262	LED light source E27 6W 510lm 4000K 220-260V A60	253
247385	LED light source E27 10W 940lm 3000K 220-260V A60	253
247392	LED light source E27 10W 940lm 4000K 220-260V A60	253
247422	LED light source E27 15W 1515lm 3000K 220-260V A60	254
247439	LED light source E27 15W 1515lm 4000K 220-260V A60	254
247317	LED light source E14 6W 3000K 522lm 220-240V C37	254
247354	LED light source E14 6W 4000K 522lm 220-240V C37	254
247347	LED light source E14 8W 720lm 3000K 220-260V C37	255
471215	LED light source E14 8W 720lm 4000K 220-260V C37	255
471222	LED light source E14 8W 720lm 3000K 220-260V C37	255
248979	LED light source E14 8W 720lm 4000K 220-260V C37	255
248986	LED light source E14 8W 720lm 4000K 220-260V C37	255
244506	LED light source G4 COB 1,5W 120lm 2700K 12V AC/DC	255
244520	LED light source G4 COB 1,5W 120lm 4000K 12V AC/DC	255
470324	G4 2W 220lm 3000K 12V DC SMD3014 SL	255
470331	G4 2W 220lm 4000K 12V DC SMD3014 SL	255
249587	LED light source ES111 12W 1080lm 2700K 230V AC 45°	257
202061	LED light source ES111 12W 1080lm 4000K 230V AC 45°	257
202078	LED light source ES111 9W 850lm 4000K 175-265V white	257
202085	LED Tube T8 9W 1350lm 4000K 220-240V 60cm 150lm/W	257
202092	LED Tube T8 9W 1350lm 6500K 220-240V 60cm 150lm/W	257
202108	LED Tube T8 18W 2700lm 4000K 220-240V 120cm 150lm/W	257
202115	LED Tube T8 18W 2700lm 6500K 220-240V 120cm 150lm/W	257
202009	LED Tube T8 22W 3300lm 4000K 220-240V 150cm 150lm/W	257
202016	LED Tube T8 22W 3300lm 6500K 220-240V 150cm 150lm/W	257
202023	LED Tube T8 9W 1350lm 4000K 220-240V 60cm 100lm/W	257
202030	LED Tube T8 9W 1350lm 6500K 220-240V 60cm 100lm/W	257
202047	LED Tube T8 18W 2700lm 4000K 220-240V 120cm 100lm/W	257
202054	LED Tube T8 18W 2700lm 6500K 220-240V 120cm 100lm/W	257
242052	LED Tube T8 22W 3300lm 4000K 220-240V 150cm 100lm/W	259
242069	LED Tube T8 22W 3300lm 6500K 220-240V 150cm 100lm/W	259
246173	LED light source adapter E14->E27	259
246166	LED light source adapter E14->GU10	259
242076	LED light source adapter E14->MR16	259
242090	LED light source adapter E14->G9	259
246210	LED light source adapter E27->E14	259
24 6 241	LED light source adapter E27->GU10	259
242083	LED light source adapter E27->MR16	259
242021	LED light source adapter E27->E40	259
242038	LED light source adapter E27->2xE27	259
242045	LED Extension of bulb mounting E27->E27 200mm	259
242113	LED Extension of bulb mounting E27->E14 200mm	260
242106	LED Extension of bulb mounting E27->GU10 200mm	260
246180	LED light source adapter GU10->E27	260
246197	LED light source adapter GU10->E14	260
	LED light source adapter GU10->MR16	
	LED light source adapter MR16->GU10 PRODUCT INDEX	

Symbol	N a zwa	Page
246289	LED light source adapter E40->E27	260
246302	LED light source adapter B22->E14	260
246258	LED light source adapter B22->E27	260
246272	LED light source adapter B22->GU10	260
246319	LED light source adapter B22->E40	260
246449	LED Ceramic GU10 lamp holder with 13cm wire	260
246685	LED Ceramic GU5,3 lamp holder with 16cm wire	260

LED MODULES

Symbol	N a zwa	Page
243400	LED OPTO module 1x SMD2835 12V 6500K 1W IP65	263
243417	LED OPTO module 2x SMD2835 12V 6500K 2W IP65	263
243424	LED OPTO module 3x SMD2835 12V 6500K 2,5W IP65	263
243431	LED OPTO module 4x SMD2835 12V 6500K 3W IP65	263

OUTDOOR WALL LAMPS

Symbol	N a zwa	Page
478146	Outdoor wall lamp CUBE 2x3W 450lm 3000K black	268
478177	Outdoor wall lamp CUBE 2x3W 450lm 4000K black	268
478153	Outdoor wall lamp CUBE 2x3W 450lm 3000K white	268
478184	Outdoor wall lamp CUBE 2x3W 450lm 4000K white	268
478160	Outdoor wall lamp CUBE 2x3W 450lm 3000K grey	268
478191	Outdoor wall lamp CUBE 2x3W 450lm 4000K grey	268
475510	Outdoor wall lamp CILINDER 2x3W 450lm 3000K	269
475541	black Outdoor wall lamp CILINDER 2x3W 450lm	269
475527	4000K black Outdoor wall lamp CILINDER 2x3W	269
475558	450lm 3000K white Outdoor wall lamp CILINDER	269
475534	2x3W 450lm 4000K white Outdoor wall lamp	269
475565	CILINDER 2x3W 450lm 3000K grey Outdoor wall lamp	269
	CILINDER 2x3W 450lm 4000K grey	

DECORATIVE

Symbol	N a zwa	Page
203846	Table lamp TAZA 3,5W 400lm 3000K - 5000K white	271
203853	Table lamp TAZA 3,5W 400lm 3000K - 5000K black	271
204430	Table lamp TAZA 3,5W 400lm 3000K - 5000K green	271
204447	Table lamp TAZA 3,5W 400lm 3000K - 5000K pastel pink	271
208971	Table lamp TAZA 3,5W 400lm 3000K - 5000K gold	271
208694	Table lamp TAZA 3,5W 400lm 3000K - 5000K yellow	271
204423	Table lamp CAMELIA 2,5W 250lm 3000K - 5000K black	273
204454	Table lamp CAMELIA 2,5W 250lm 3000K - 5000K silver	273
204461	Table lamp CAMELIA 2,5W 250lm 3000K - 5000K gold	273
204478	Table lamp RIWIA 1,0W 120lm 3000K - 5000K silver	275
204485	Table lamp RIWIA 1,0W 120lm 3000K - 5000K rose gold	275
249877	JUTE pendant lamp holder 1✦5 meters 1xE27	277
249884	JUTE pendant lamp holder 1✦5 meters 2xE27	277
249891	JUTE pendant lamp holder 1✦5 meters 3xE27	277

LED SPOTLIGHTS

Symbol	N a zwa	Page
241321	Recessed round spotlight sanded gold&black	279
241314	Recessed round spotlight sanded gold&white	279
244902	Recessed adjustable round spotlight brushed black	279
244810	Recessed adjustable round spotlight brushed alu	279
244896	Recessed adjustable round spotlight brushed silver	279
241284	Recessed adjustable round spotlight SLIM OROSA matt	280
241253	Recessed adjustable round spotlight SLIM OROSA brushed	280
241239	Recessed adjustable round spotlight SLIM OROSA brushed	280
241208	Recessed adjustable square spotlight SLIM AKROS brushed black	280
241215	Recessed adjustable square spotlight SLIM AKROS brushed alu	280

Symbol	N a zwa	Page
241222	Recessed adjustable square spotlight SLIM AKROS matt white	280
249235	Recessed round spotlight black	281
242823	Recessed round spotlight satin	281
242854	Recessed round spotlight white	281
242885	Recessed adjustable round spotlight satin	281
242915	Recessed adjustable round spotlight white	281
249259	Recessed adjustable round spotlight black	281
242939	Recessed adjustable square spotlight gold	282
242946	Recessed adjustable square spotlight satin	282
242977	Recessed adjustable square spotlight white	282
241093	Downlight alu✦ square black brushed adjustable	283
240683	Downlight alu✦ square white brushed adjustable	283
240669	Downlight alu✦ square silver brushed adjustable	283
249266	Recessed waterproof round spotlight / die-cast / MR11 white	285
249273	Recessed waterproof round spotlight / die-cast / MR11 alu	285
249297	Recessed waterproof round spotlight / die-cast / MR11 black	285
245428	Recessed waterproof round spotlight / die-cast white	286
245435	Recessed waterproof round spotlight / die-cast alu	286
245442	Recessed waterproof round spotlight / die-cast gold	286
471055	Recessed waterproof round spotlight / die-cast black	286
245374	Recessed waterproof square spotlight / die-cast white	287
245398	Recessed waterproof square spotlight / die-cast gold	287
471062	Recessed waterproof square spotlight / die-cast black	287
242540	Surface round spotlight / TUBE white	287
242557	Surface round spotlight / TUBE black	287
242656	Recessed round spotlight ROLLO MIDI white	289
243851	Recessed round spotlight ROLLO MIDI black	289
243134	Recessed round spotlight ROLLO MIDI alu	291
243141	Downlight recessed-mounted square white CUBO MIDI	291
249723	Tube surface spotlight square adjustable white CUBO	291
249747	Tube surface spotlight square adjustable brushed silver CUBO	291

LED line

WE CO-CREATE



DIGITAL VERSION



LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

 /LEDIN Group Sp. z o.o.

 /LED line

 /LED line

UK Distribution by:

DAZZLED LIGHTING

Tel: 01205 837104

Email: sales@dazzledlighting.co.uk

www.dazzledlighting.co.uk

LED line